


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	New Release	03/17/04	H.T.

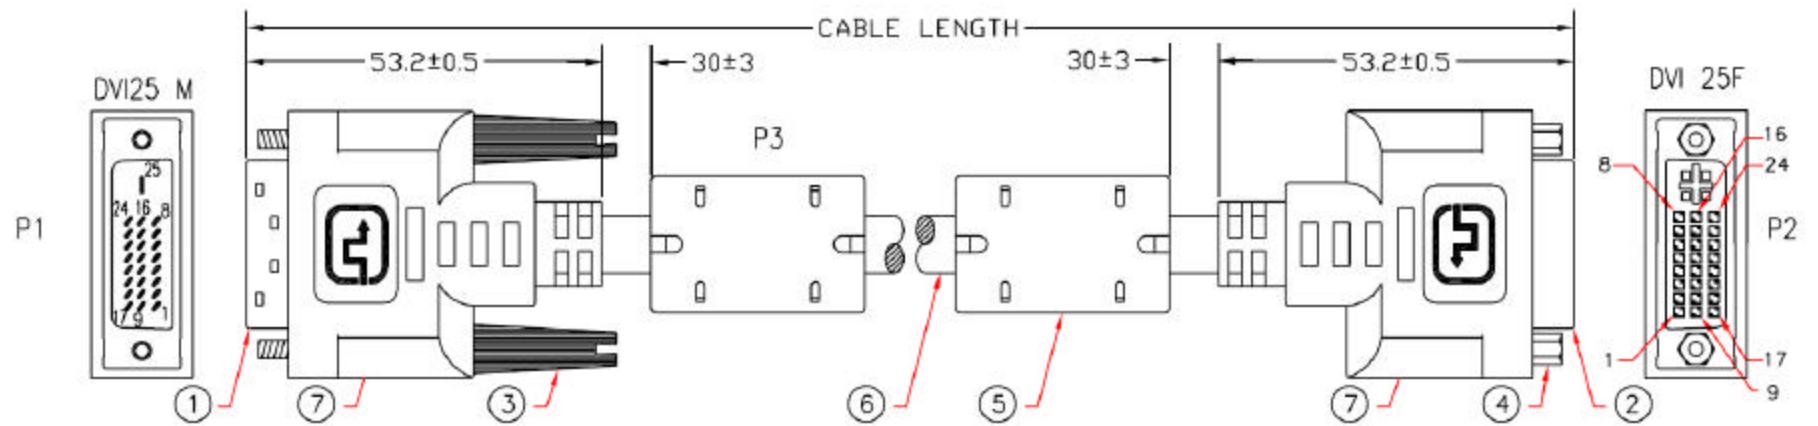

PIN ASSIGNMENT							
P1		P2		P1		P2	
1	—	1	BROWN	14	—	14	ORANGE
2	—	2	WHITE	15	—	15	YELLOW
3	—	3	SHIELD	16	—	16	WHITE
4	—	4	RED	17	—	17	GREEN
5	—	5	WHITE	18	—	18	WHITE
6	—	6	RED	19	—	19	SHIELD
7	—	7	PURPLE	20	—	20	BLUE
8	—	8	SHIELD	21	—	21	WHITE
9	—	9	ORANGE	22	—	22	SHIELD
10	—	10	WHITE	23	—	23	GREY
11	—	11	SHIELD	24	—	24	WHITE
12	—	12	YELLOW	25	—	25	SHIELD
13	—	13	WHITE				
14	—	14	SHIELD				

ITEM NO.	MATERIAL / SPECIFICATION	QTY	UNIT
	CABLE ASSEMBLY PARTS LIST		
	UL1061 26AWG, INSULATOR WIRE, LENGTH 28mm	2	PCS.
	BLACK HEAT SHRINK TUBE # 1.5 x 10 mm	46	PCS.
	BLACK HEAT SHRINK TUBE # 3.0 x 10 mm	16	PCS.
7.	COPPER FOIL 7.5 x 90 mm	2	PCS.
	COPPER FOIL 33 x 90 mm	2	PCS.
	TRANSPARENT PE INNER MOLD	1	PCS.
	BEIGE PVC MOLDED HOOD	1	PCS.
6.	UL20276 [(28AWG.x1P+D+FAM)x7+(28AWG.x1 PAIR)+(28AWG.x3C)]+AM+B, O.D. 8.5mm, BEIGE PVC OUTER JACKET	XX	m
5.	PVC Molded Hood, Color Beige	1	PCS.
3.	FERRITE CORE (17.5x28.5x9.5mm) WITH BEIGE PVC MOLDED HOOD	1	PCS.
4.	HEX NUT #4-40	2	PCS.
3.	BEIGE PVC MOLDED THUMBSCREW #4-40, LENGTH 46.5mm	2	PCS.
2.	DVI25 FEMALE, GOLD FLASH ON CONTACTS	1	PCS.
1.	DVI25 MALE, GOLD FLASH ON CONTACTS	1	PCS.
		OFF	UNIT

UNLESS OTHERWISE SPECIFIED: 1. DIMENSIONS ARE IN INCHES 2. TOLERANCES DECIMALS E.P. AS 25 3. DO NOT SCALE DRAWING 4. REWORK ALL BURRS AND BREAK SHARP EDGES PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION IS SUBJECT MATTER COPIED HEREON, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY		CUSTOMER APPROVAL	<b>SFCABLE.COM</b> TITLE: DVI-D MALE / DVI-D FEMALE DUAL LINK CABLE ASSEMBLY	
DRAWN: Howie Tseng DATE: 03/17/04 CHECKED:	DATE: 03/17/04 SIZE: DV21-XX DWG NO.: DV21-XX REV: A	SCALE: NONE Release Date: 03/17/04 SHEET: 1 OF 1		