





P1

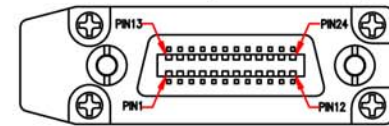

P3

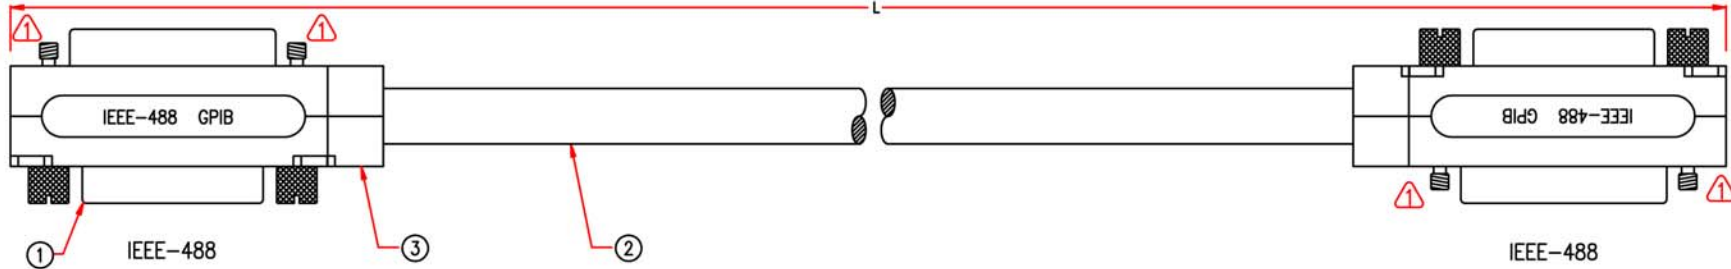

P2

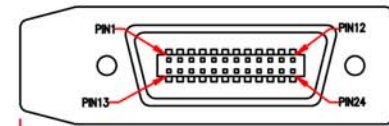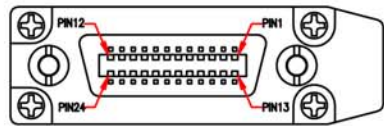

P4

| 3019 | | | | |
|-------------------|--------|--------|--------|--------|
| | P1 | P2 | P3 | P4 |
| BROWN | 1 | 1 | 1 | 1 |
| BROWN/WHITE | 13 | 13 | 13 | 13 |
| RED | 2 | 2 | 2 | 2 |
| RED/WHITE | 14 | 14 | 14 | 14 |
| ORANGE | 3 | 3 | 3 | 3 |
| ORANGE/BLACK | 15 | 15 | 15 | 15 |
| PINK | 4 | 4 | 4 | 4 |
| PINK/BLACK | 16 | 16 | 16 | 16 |
| YELLOW | 5 | 5 | 5 | 5 |
| BLACK/WHITE | 17 | 17 | 17 | 17 |
| GREEN | 6 | 6 | 6 | 6 |
| GREEN/WHITE | 18 | 18 | 18 | 18 |
| LIGHT GREEN | 7 | 7 | 7 | 7 |
| LIGHT GREEN/BLACK | 19 | 19 | 19 | 19 |
| BLUE | 8 | 8 | 8 | 8 |
| BLUE/WHITE | 20 | 20 | 20 | 20 |
| LIGHT BLUE | 9 | 9 | 9 | 9 |
| LIGHT BLUE/BLACK | 21 | 21 | 21 | 21 |
| PURPLE | 10 | 10 | 10 | 10 |
| PURPLE/WHITE | 22 | 22 | 22 | 22 |
| GREY | 11 | 11 | 11 | 11 |
| GREY/BLACK | 23 | 23 | 23 | 23 |
| SHIELD | 12 | 12 | 12 | 12 |
| YELLOW/BLACK | 24 | 24 | 24 | 24 |
| SHIELD | SHIELD | SHIELD | SHIELD | SHIELD |

NOTE: All relevant materials are complied with RoHS directive .

| 3 | COPPER FOIL 7.5*35mm | 2 | M583 |
|----------|---|--|------------------|
| | IEEE-488 MOLTEN HOOD | 2set | M83 |
| 2 | UL2464 12 TWISTED PAIRS 26AWG, ALUM-MYLAR AND COPPER BRAID FOIL FOIL SHIELDING WITH DRIAN WIRE, OD 10.7mm, JACKET SAND WITH A GREENISH CAST | L+20mm | M2 |
| 1 | IEEE-488, MALE AND FEMALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR | 2set | M83 |
| No. | DESCRIPTION | Q'TY | Supplier |
| APPROVED | SFCable.com 1-888-275-8755 | Cable Length Unless Other Spec. Tolerances: | |
| CHECKED | | HU | 0 ~200mm ±10mm |
| DRAWING | | JIANG | 201~1000mm ±20mm |
| DATE | 31/MAY/10 | ITEM NO. | E800-XX |
| | | UNIT:mm | |