
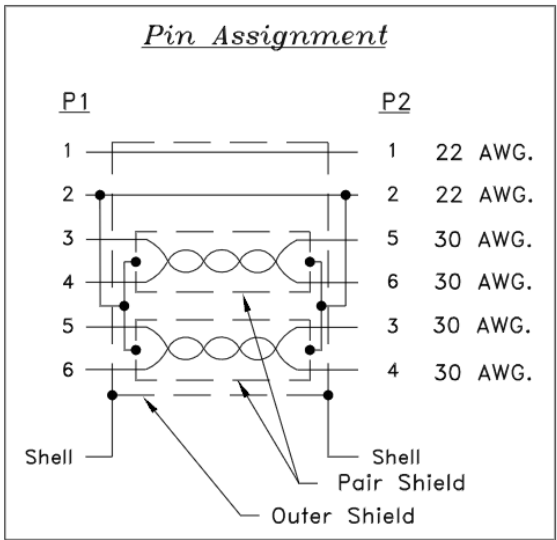


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	03/10/99	H.T.

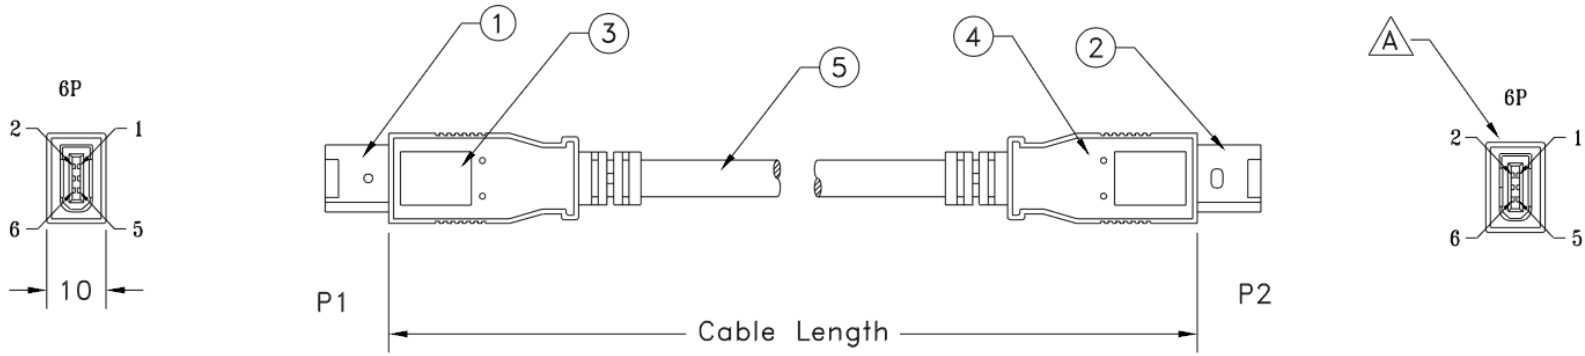

**A** FERRULE: 2.54um MIN TIN-LEAD  
 SHELLS: 5.08um MIN TIN-LEAD OVER 2.54um MIN COPPER  
 CONTACTS: 0.76u MIN GOLD (0.076um GOLD OVER 0.76um MIN PALLADIUM)

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
5.	UL20276, (2)22 AWG. Power Lead + (2)30 AWG. Shielded Twisted Pair Signale, Overall Shielded, Black Outer PVC jacket	XX	FT.
4.	Beige Molded PVC Hood	1	PCS.
3.	Beige Molded PVC Hood	1	PCS.
2.	IEEE-1394 6 Pin Male W/Gold Plating Contacts	1	PCS.
1.	IEEE-1394 6 Pin Male W/Gold Plating Contacts	1	PCS.
CABLE ASSEMBLY PARTS LIST			

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.	CUSTOMER R.F.Q. NO. DRAWN DATE <b>Howie Tseng</b> 03/10/99 CHECKED CUSTOMER APPROVAL
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY	

<b>SFCABLE.COM</b>			
TITLE <b>IEEE-1394 Cable Assembly (6 POS, Plug/Plug, 1394-1995)</b>			
SIZE	DWG NO.	PART NO. <b>FW11-XX</b>	REV. <b>A</b>
SCALE: NONE	RELEASE DATE: 03/10/99	SHEET: 1 OF 1	