
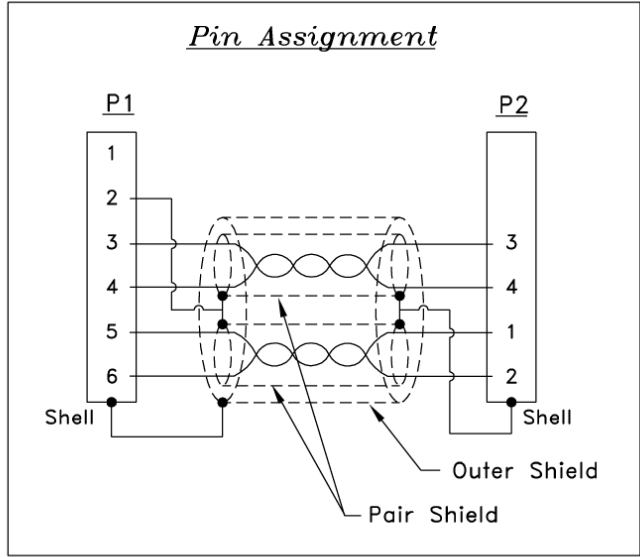


		REVISION	
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	04/08/99	H.T.

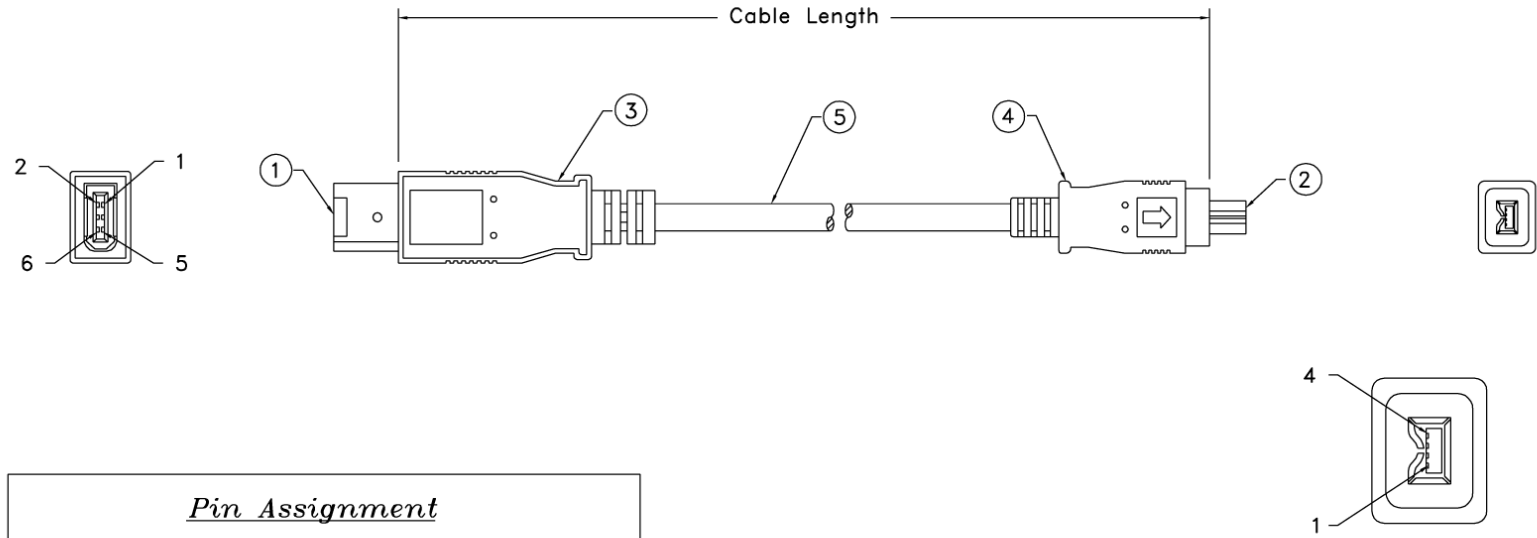

NOTE: ALL RELEVANT MATERIALS ARE COMPLIED WITH ROHS DIRECTIVE

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
5.	28 AWG., UL20276, 2 Twisted Pair + Drain Wire, Double Shielded with AL-FOIL, Black Outer PVC jacket	XX	FT.
4.	Beige Molded PVC Hood	1	PCS.
3.	Beige Molded PVC Hood	1	PCS.
2.	IEEE-1394 4 Pin Male W/Gold Plating Contacts	1	PCS.
1.	IEEE-1394 6 Pin Male W/Gold Plating Contacts	1	PCS.
<b>CABLE ASSEMBLY PARTS LIST</b>			

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.	CUSTOMER
	R.F.Q. NO.
	DRAWN DATE <b>Howie Tseng</b> 04/08/99
	CHECKED
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY	CUSTOMER APPROVAL

<b>SFCABLE.COM</b>			
TITLE <b>IEEE-1394 Cable Assembly (6P/4P,4C, Molded, Color Beige)</b>			
SIZE	DWG NO.	PART NO. <b>FW12-XX</b>	REV. <b>A</b>
SCALE: NONE	RELEASE DATE: 04/08/99	SHEET: 1	OF 1