


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	04/08/99	H.T.

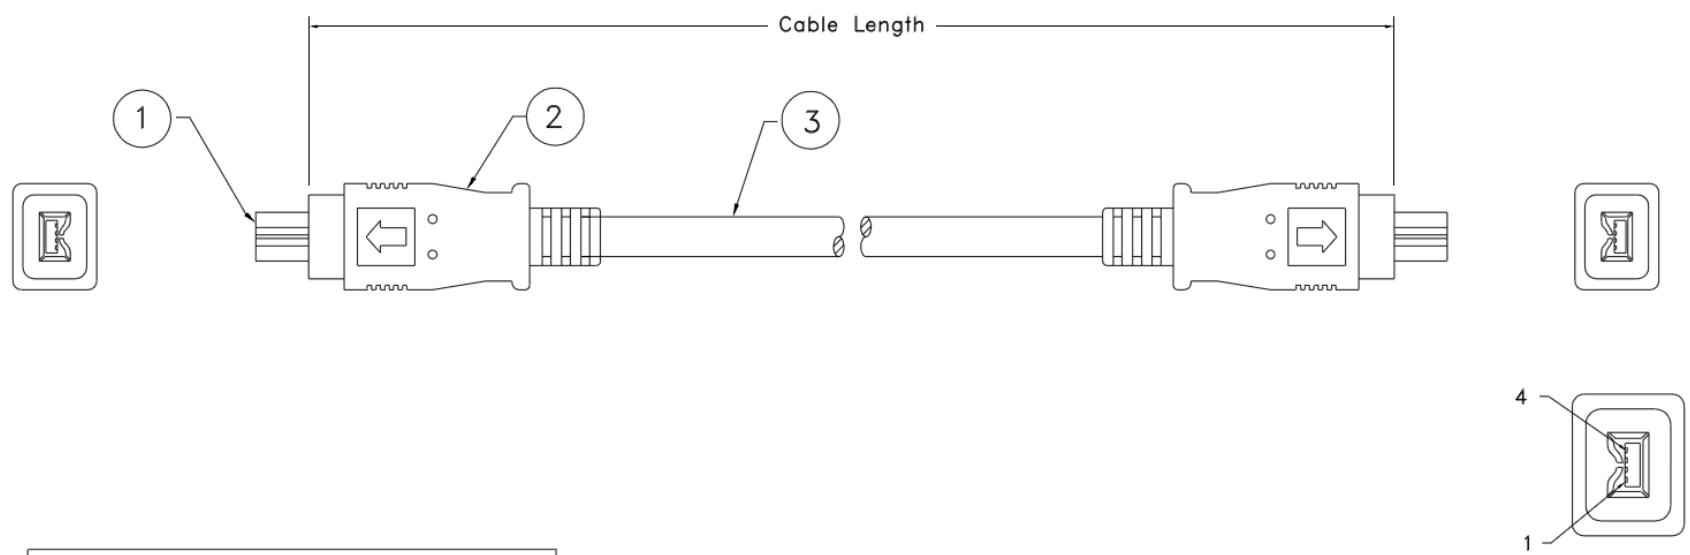

Pin Assignment

IEEE-1394 4P	IEEE-1394 4P
1	3
2	4
3	1
4	2
G	G

ITEM NO.	MATERIAL / SPECIFICATION	QTY RECD	UNIT
3.	28 AWG., UL20276, 2 Twisted Pair + Drain Wire, Double Shielded with AL-FOIL, Black Outer PVC jacket	XX	FT.
2.	Beige Molded PVC Hood	2	PCS.
1.	IEEE-1394 4 Pin Male W/Gold Plating Contacts	2	PCS.

CABLE ASSEMBLY PARTS LIST

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.	CUSTOMER	SFCABLE.COM		
	R.F.D. NO.			
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY	DRAWN Howie Tseng	DATE 04/08/99	TITLE IEEE-1394 Cable Assembly (4P/4P,4C, AV, Molded, Color Beige)	
	CHECKED	CUSTOMER APPROVAL	SIZE	DWG NO.
			PART NO. FW13-XX	REV. A
		SCALE: NONE	RELEASE DATE: 04/08/99	SHEET: 1 OF 1