


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	05/18/94	H.T.

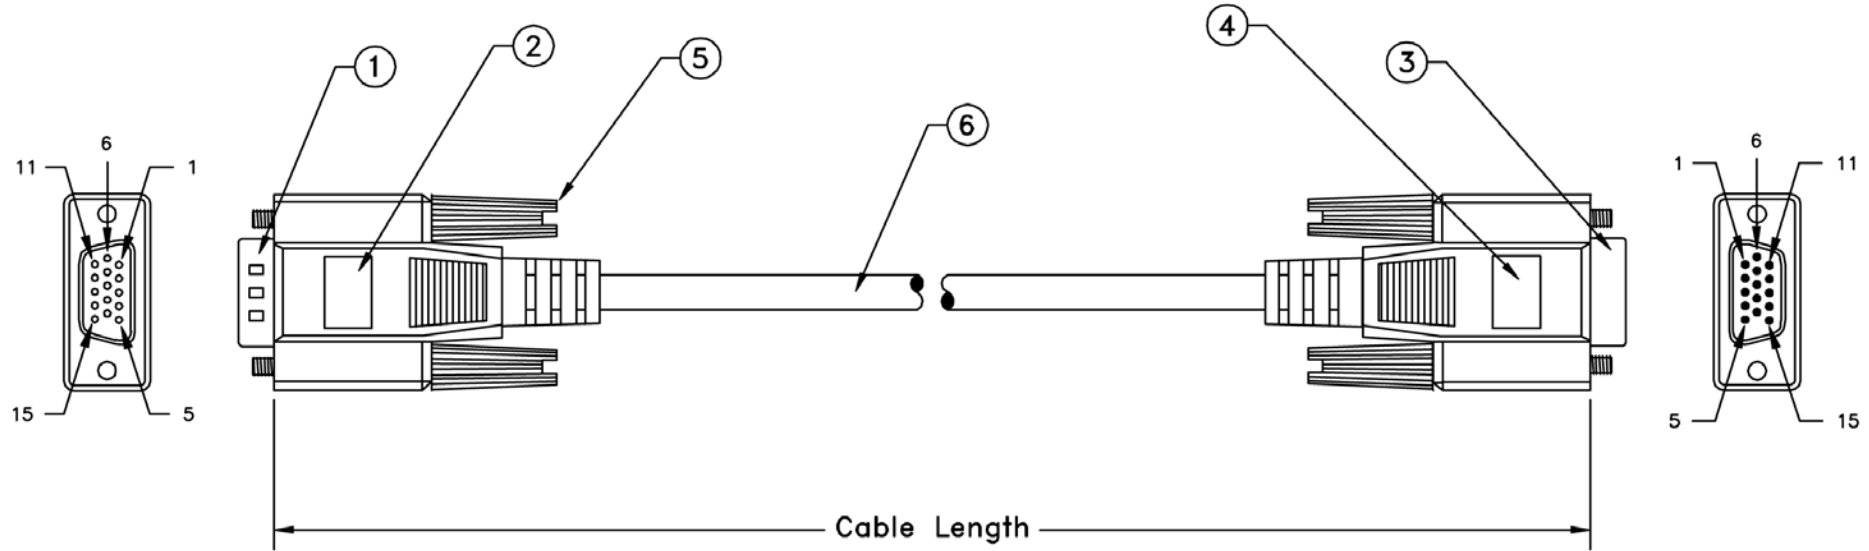

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 15 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	High-Density 15 Pin Female W/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	High-Density 15 Pin Male W/Gold Plating Contacts	1	PCS.

CABLE ASSEMBLY PARTS LIST

<small>UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.</small>	CUSTOMER
	R.F.Q. NO.
	DRAWN DATE Howie Tseng 05/18/94
	CHECKED
<small>PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY</small>	CUSTOMER APPROVAL

SFCABLE.COM			
TITLE HD15, M/F, Cable Assembly (15C, Streight Through)			
SIZE	DWG NO.	PART NO. H521-XX	REV. A
SCALE: NONE	RELEASE DATE: 05/18/94	SHEET: 1 OF 1	