


P1: M-152

P2: M-152

P3: M-483

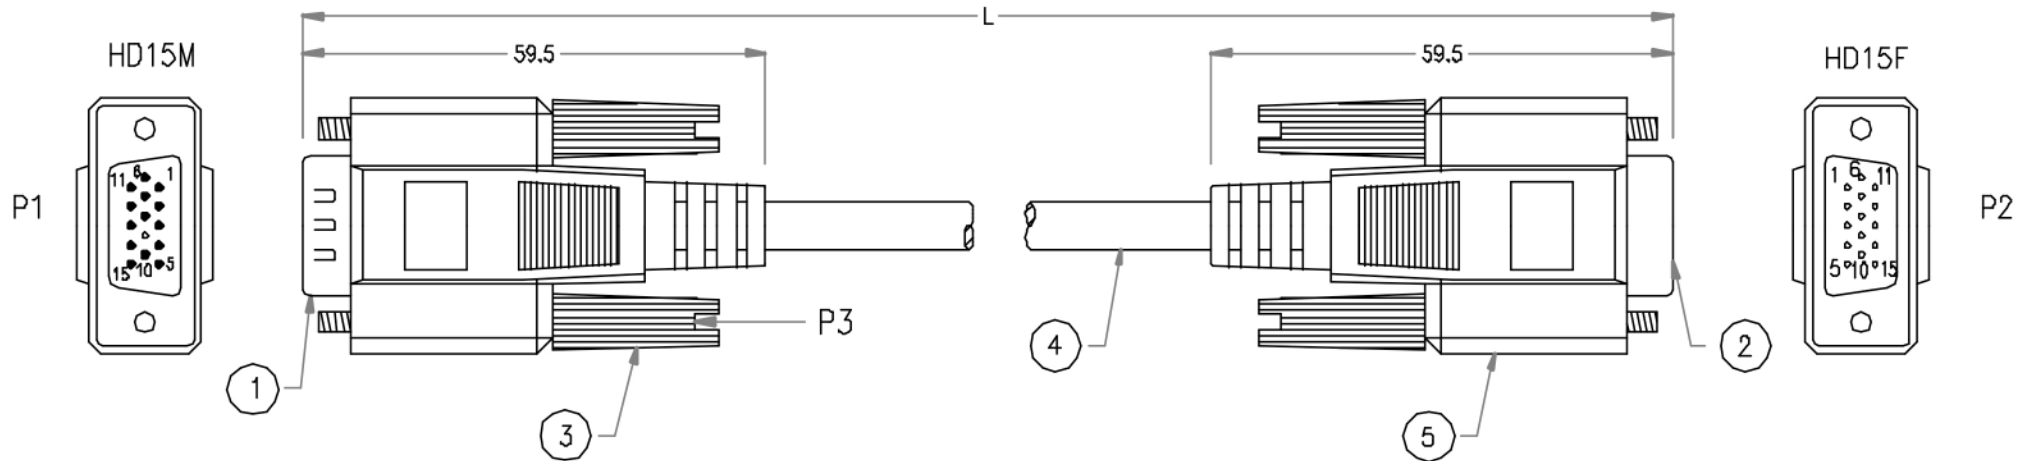

1070		
P1		P2
1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5
6	_____	6
7	_____	7
8	_____	8
10	_____	10
11	_____	11
12	_____	12
13	_____	13
14	_____	14
15	_____	15
SHIELD	_____	SHIELD

L	LENGTH		
5	MOLDED PVC BEIGE		M304
4	14C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 6.0, JACKET BEIGE		M304
3	MOLDED THUMBSCREW #4-40, BEIGE	4	M95
2	HD15 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M1
1	HD15 MALE WITHOUT PIIN 9, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M1
No.	DESCRIPTION	Q'TY	Supplier

APPROVED			Cable Length Unless Otherwise Spec. Tolerances: 0 ~0.2M ±0.01M 0.21~1.0M ±0.02M 1.1 ~1.5M ±0.025M 1.51~2.1M ±0.03M 2.1M ↑ ±0.04M
CHECKED	譚小瓊		
DRAWING	劉俊華		
ITEM NO.	H521-XX		