

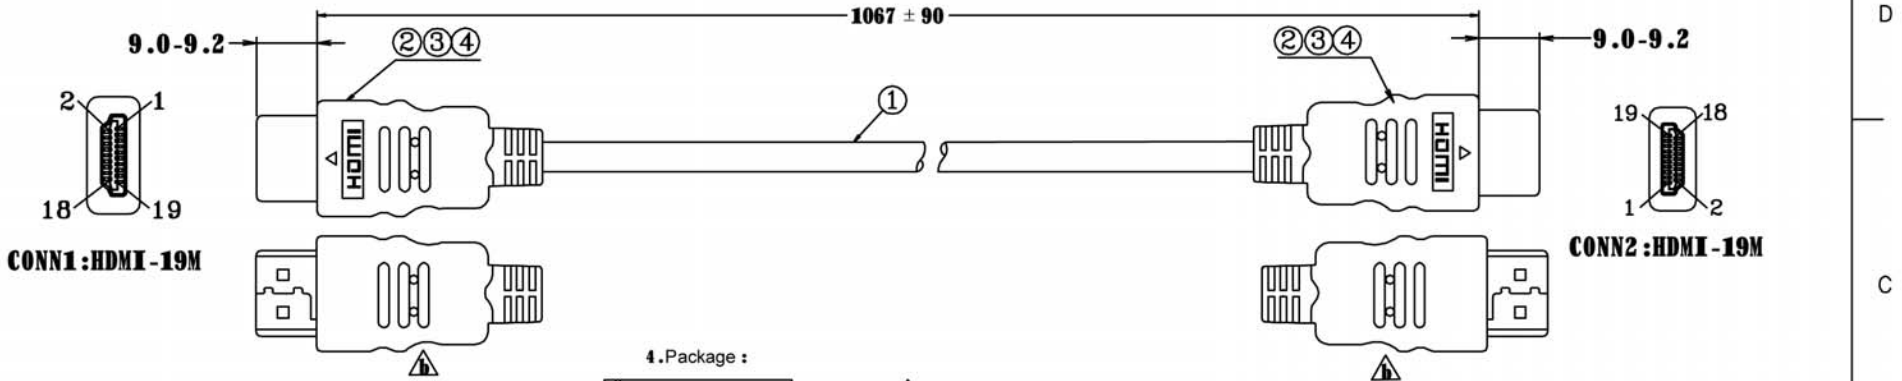



HDMI -19M/HDMI -19M .L=35FT



1.Pin Assignment :

CONN1	CONN2	CONN1	CONN2
1	1	10	10 White
3	3 Red	12	12 Green
2	2 Ground	11	11 Ground
4	4 White	14	14 White
6	6 Brown	19	19 Black
5	5 Ground	17	17 Ground
7	7 White	13	13 White
9	9 Blue	15	15 Yellow
8	8 Ground	16	16 Orange
		18	18 Red
		6	6 Ground



- 2.Electricity Testing :
- A.Voltage: DC 300V/10ms
 - B.Insulation Resistance : > 10MΩ
 - C.Conduct Resistance : < 3Ω
 - D.T4 Testing

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
①	Wire	UL20276 [26AWG(7/0.16TA)*1P-AE(7/0.16TA)+MY]*5+26AWG(7/0.16TA)*4C-F-AE(7/0.16TA)+B(24*8/0.12AL)HIGH SPEED HDMI CABLE WITH ETHERNET OD:8.5 Black CL2 L=1067mm (RoHS)	1	PC
②	Conn	HDMI -19P(M) Golden Plated (RoHS)	2	PCS
③	Inner Mold	Transparent PE (RoHS)	4	g
④	Outer Mold	45P Black PVC (RoHS)	16.9	g
⑤	Sticker	25*50mm (RoHS)	1	PC
⑥	Sticker	57mm*30mm:HDMI(RoHS)	1	PC
⑦	Bag	10" × 12" × 08 (RoHS)	1	PC
⑧	Bag	(20+16) " × 28" (RoHS)	1	PC
⑨	Box	48 × 40 × 20cm (RoHS)	1/14	Box