


**Electrical Test:**

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 5 OHM (MAX)
3. INSULATION RESISTANCE: 10M OHM (MIN) DC 300V, DC 300V/10ms

**Notice:**

**PIN Assignment**

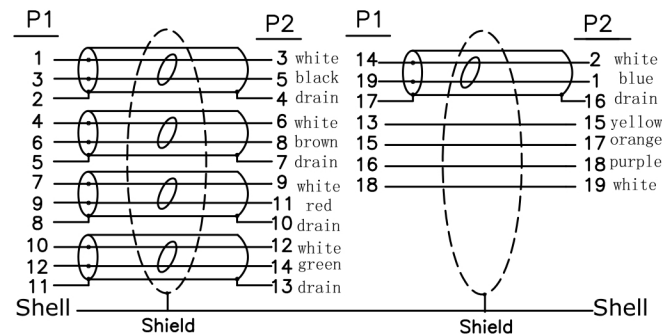

12	HDMI DM~transparent dust cover~PVC	1	PCS
11	HDMI M ~transparent dust cover~PVC	1	PCS
10	HDMI D TYPE 19P M~ 34AWG white cleat ~double row	1	PCS
9	HDMI A TYPE 19P M ~34AWG black cleat~double row	1	PCS
8	Outside Molding: 45P PVC Color:Black	16	G
7	Inside Molding: transparent PE	3	G
6	black tube: $\phi$ 1.5 20MM	0.02	m
5	black tube: $\phi$ 0.4 T=0.12±0.03	0.09	m
4	transparent tube: $\phi$ 1.5	0.05	m
3	HDMI D TYPE 19P M ~automatic solder~black rubber core~shell gold plated~pin gold plated	1	PCS
2	HDMI M 19P~black rubber core~automatic solder~Pin gold plated~shell gold plated	1	PCS
1	UL20276 (34AWG*1P+EAM)*5C+32AWG*1P+32AWG*2C+AB 30%copper-braid~OD:4.2MM~black mark: HIGH SPEED HDMI® CABLE WITH ETHERNET E515987 兄 AWM STYLE 20276 80°C 30V VW-1 C1	L	M
NO	DESCRIPTION	Q'TY	UNIT

TOLERANCE		INCHES		M/M		TITLE:			
.X	.015	.30		HDMI AM TO HDMI DM gold plated					
.XX	.010	.10		CUSTOMER : HDMI-MICRO-XX					
.XXX	.005	.05		CUSTOMER P/N:					
DRAWN BY		Hong		SCALE		NONE		DRAWING NO:	REV A01
CHECK BY				UNIT		MM			
APPD BY				DATE		2019.01.14		1/1	

