


Pin Assignment

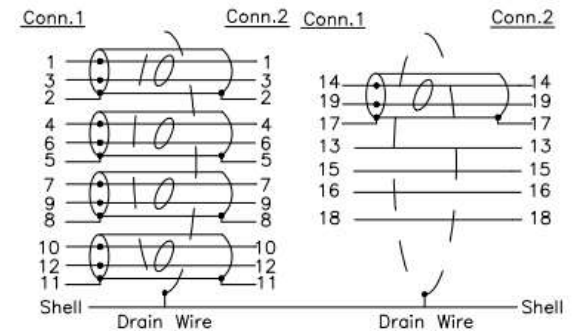

ELECTRICAL TEST:

- 1.100% OPEN AND SHORT & MISWIRE TEST
- 2.CONTACT RESISTANCE:5 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN),DC 300V/10ms.

Notice:

- 1.Support Bandwidth up to 48Gbps
- 2.Support Resolution up to 8k@60Hz,4K@120Hz.
- 3.ALL COMPONENTS ARE RoHS AND REACH COMPLIANT.

NO	DESCRIPTION	Q'TY	UNIT	REV	ECN NO.	DESCRIPTION	DATE																								
7	HDMI A Type Male Connector dust cap	2	pcs																												
6	Outside Molding: 45P PVC Color:Black	20	g																												
5	Inside Molding: Transparent PE	8	g																												
4	Copper foil 25u W=5MM	0.08	M																												
3	HDMI A Type Male Connector The tinplate	2	pcs																												
2	HDMI A Type Male Connector, Insulation Black. Pin Gold Plated, Shell Gold Plated	2	pcs																												
1	HDMI2.1~UL20276~[25AWG(1/0.45BC)+EAM]*4P+[30AWG(1/0.254TC)+EAM]*1P+26AWG(1/0.4TC)*1C+30AWG(1/0.254TC)*3C+AEB(16/12/0.12AL 90%AL)~OD:8.0MM~Color:Black Marking:ULTRA HIGH SPEED HDMI CABLE(-25.4mm-) E515987 ㊄ AWM STYLE 20276 80 30V VW-1 C1	4.59	M																												
				<table border="1"> <thead> <tr> <th colspan="2">TOLERANCE</th> <th colspan="2">INCHES</th> <th colspan="2">M/M</th> </tr> </thead> <tbody> <tr> <td>.X</td> <td>.015</td> <td>.30</td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XX</td> <td>.010</td> <td>.10</td> <td></td> <td></td> <td></td> </tr> <tr> <td>.XXX</td> <td>.005</td> <td>.05</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		TOLERANCE		INCHES		M/M		.X	.015	.30				.XX	.010	.10				.XXX	.005	.05					
TOLERANCE		INCHES		M/M																											
.X	.015	.30																													
.XX	.010	.10																													
.XXX	.005	.05																													
				DRAWN BY: Bin Chen		ITEM NO.: HDMI-V218K																									
				CHECK BY:		SCALE: NONE																									
				APPD BY:		UNIT: mm																									
						DRAWING NO.:																									
						DATE: 2022.05.26																									
						REV. A0																									
						1/1																									