


CABLE MARKING:


PLUS CORNING FIBER OPTICAL CABLE 8 CORE SMF-28 ULTRA MM-3.0 OFNP
 E486140 YYYYMMDD XXXXXM

PACKING:

1 PC IN A ZIP BAG

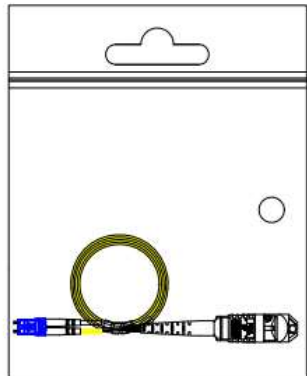

PACKING:



3D TEST REQUIREMENT: 100%

- WaveLength: 1310nm&1550nm
- 1.Insertion loss: MPO/APC: $\leq 0.35\text{dB}$
- LC/UPC: $\leq 0.20\text{dB}$
- 2.Return loss: MPO/APC : $\geq 60\text{dB}$
- LC/UPC : $\geq 50\text{dB}$

APPROVED		<p>SFCable</p> <p>1-888-275-8755</p>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm ↑ ±40mm
CHECKED	HU		
DESIGNER	XIE		
DRAWING	TANG		
DATE	19/MAY/23		


TECHNICAL REQUIREMENT\:

- 1.WHITE 2.0 NUMBER RINGS 1 TO 12,
THE FIBER COLORS CORRESPOND TO THE FOLLOWING\:
- 2.AFTER THE MTP-MTP TEST IS QUALIFIED, THE LC CONNECTOR IS PROCESSED

NUMBER RING	1	2	3	4	9	10	11	12
FIBER COLOR	BLUE	ORANGE	GREEN	BROWN	YELLOW	PURPLE	PINK	AQUA
HEAT SHRINK TUBE COLOR	YELLOW	YELLOW	YELLOW	YELLOW	WHITE	WHITE	WHITE	WHITE

BRANCH LENGTH DIAGRAM:

- 1.LC END OF THE TRUNK SKIN PEEL LENGTH 700mm
- 2.2MM EMPTY PIPE RETENTION LENGTH: 500+50MM
- 3.LC END 900UM AIR PIPE LEAKAGE LENGTH: 23MM

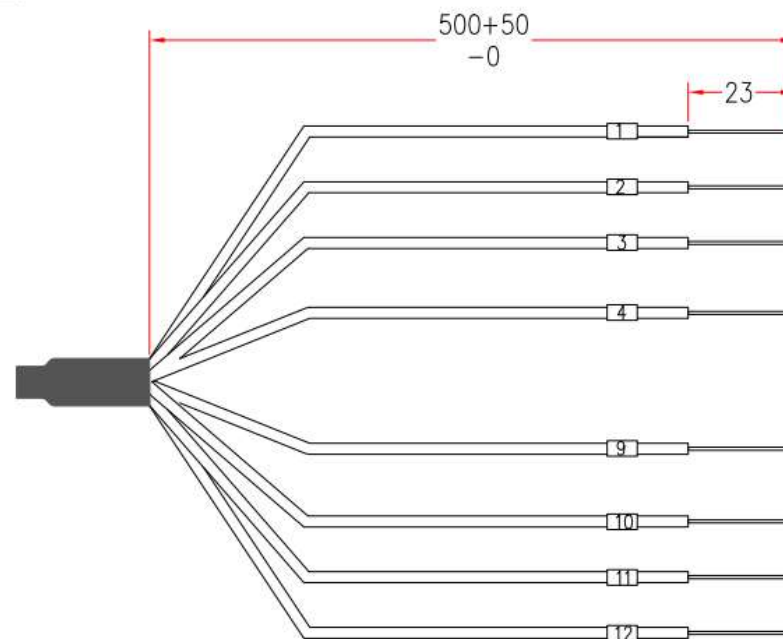

8M39 Type B		
P1		P2
1	—————	12 AQUA
2	—————	11 PINK
3	—————	10 PURPLE
4	—————	9 YELLOW
X	—————	X
X	—————	X
X	—————	X
X	—————	X
9	—————	4 BROWN
10	—————	3 GREEN
11	—————	2 ORANGE
12	—————	1 BLUE

No.	DESCRIPTION		Q'TY	Supplier
APPROVED		 SFCable 1-888-275-8755		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm ↑ ±40mm
CHECKED	HU			
DESIGNER	XIE			
DRAWING	TANG			
DATE	19/MAY/23			
ITEM NO.	MTP-OS2-BF08LCU-XX	UNIT:mm	 	

REV.		CHECKED	
------	--	---------	--