


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	05/12/95	H.T.

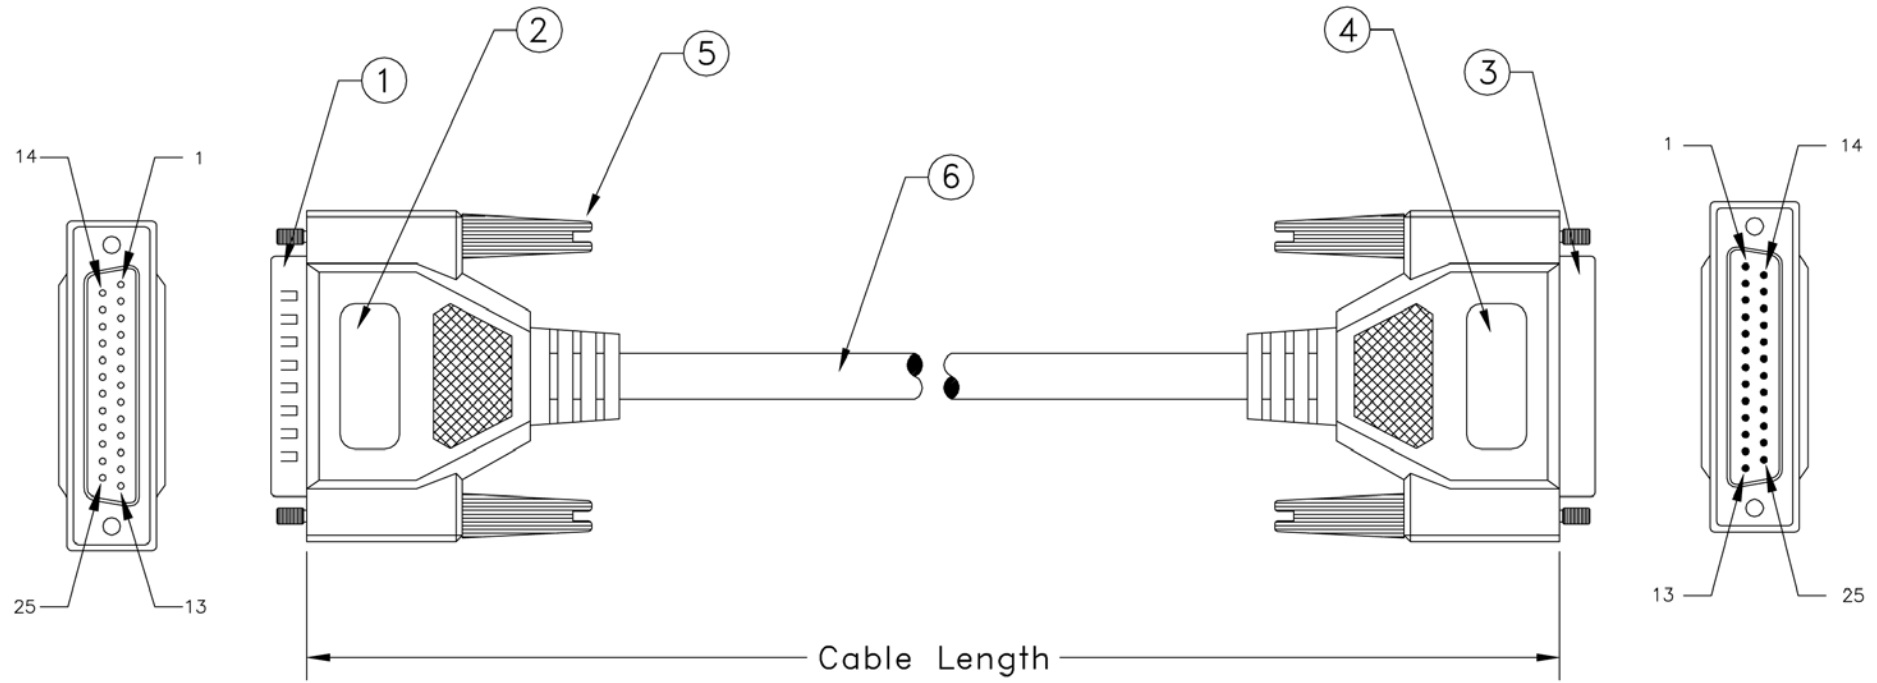

**Pin Assignment**

DB25 Male	DB25 Female
1	1
2	3
3	2
4	5
5	4
6	20
8	
20	6
7	8
7	7
G	G

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 8 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 25 Pin Female w/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 25 Pin Male W/Gold Plating Contacts	1	PCS.

**CABLE ASSEMBLY PARTS LIST**

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.	CUSTOMER
	R.F.Q. NO.
	DRAWN DATE <b>Howie Tseng</b> 05/12/95
	CHECKED
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY	CUSTOMER APPROVAL

<b>SFCABLE.COM</b> <b>1-888-275-8755</b>			
TITLE Null Modem Cable Assembly (DB25, M/F, 8C, Molded)			
SIZE	DWG NO. <b>NU22-XX</b>	PART NO. <b>NU22-XX</b>	REV. <b>A</b>
SCALE: NONE	RELEASE DATE: 05/12/95	SHEET: 1	OF 1