


REVISION		DATE	APPROVED
LTR	DESCRIPTION		
A	NEW RELEASE	05/18/94	H.T.

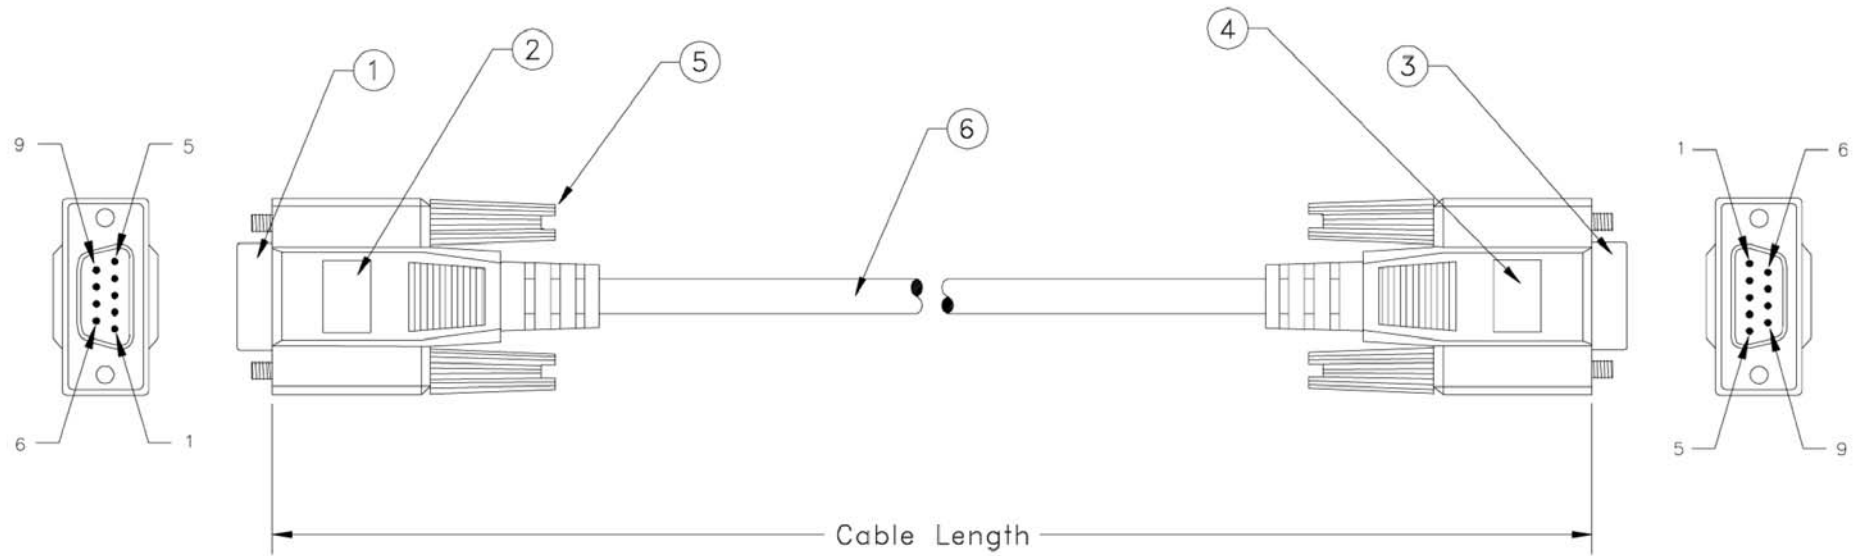

Pin Assignment

DB 9 Female	DB 9 Female
1	4
6	3
2	2
3	6
4	1
5	5
7	8
8	7
G	G

NOTE: ALL RELEVANT MATERIALS ARE COMPLIED WITH ROHS DIRECTIVE

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 7 Conductors + Drain Wire, Single Shielded with AL-FOIL, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	4	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	D-Sub 9 Pin Female W/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 9 Pin Female W/Gold Plating Contacts	1	PCS.

CABLE ASSEMBLY PARTS LIST

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.	CUSTOMER
	R.F.Q. NO.
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY	DRAWN DATE Howie Tseng 05/18/94
	CHECKED
CUSTOMER APPROVAL	

SFCABLE.COM 1-888-275-8755			
TITLE Null Modem Cable Assembly (DB9, F/F, 7C, Molded)			
SIZE	DWG NO. NU33-XX	PART NO. NU33-XX	REV. A
SCALE: NONE	RELEASE DATE: 05/18/94	SHEET: 1	OF 1