


P1: M-010

P2: M-028B

Customer No.: No.4



P1

P2

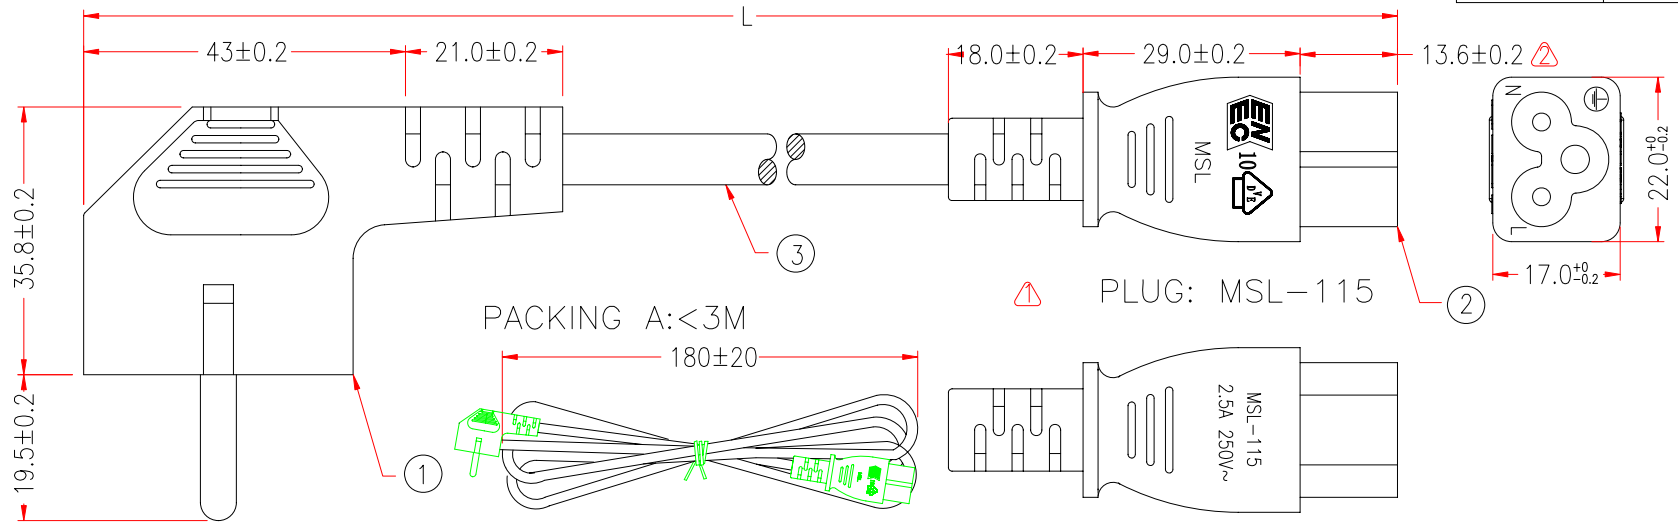

PLUG: MSL-202

PACKING B: >3M

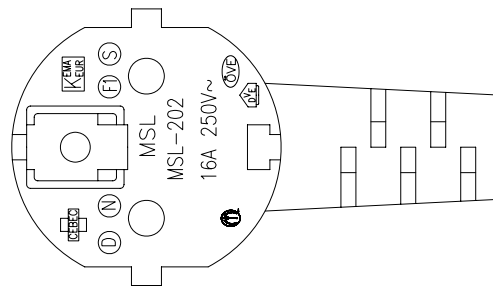

MARKING:

H05W-F 3G 0.75mm² D S N FI OVE KEMA-KEUR CEDEK
 IEMMEQU <VDE> ⊕ N20050 GTSA-3 3G 0.75mm² MSL

* NOTE: All relevant materials are complied with RoHS directive .
 THE MARKING IS CONCAVE LETTERING MOULD

P1	P2
L	L BROWN
N	N BLUE
E	E GREEN/YELLOW

3	H05W-F 3G 0.75mm ² GTSA-3, OD 6.8mm, JACKET BLACK, DRAWING No. EPH5V0107503C-042	H5TH04-0304K09	L-20mm	M304
	MOLDED PVC 45P, COLOR BLACK	H1BF01-0304K09		M304
2	BRACKET: YS-008	A1QC17-0767	1	M767
	TERMINAL: 98732PS-0	A1QB29-0257	1	M257
1	TERMINAL: 98714PS-0	A1QB05-0257	2	M257
	MOLDED PVC 45P, COLOR BLACK	H1BF01-0304K09		M304
	TERMINAL: 98651A	A1QA10-0257	1	M257
No.	DESCRIPTION	Q'TY	Supplier	

APPROVED				SF Cable		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm±40mm
CHECKED	HU	07/AUG/17	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS		
DRAWING	XIAO	07/AUG/17	PRODUCT NO.	P-06BM-G		

REV.2 2017.08.07 MODIFY CABLE & P2 MOLDED SIZE, ADD NOTE

REV.1 2011.03.09 MODIFY P2 MODLE WORD

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm