



P1: M-004

P2: M-042

Customer No.:

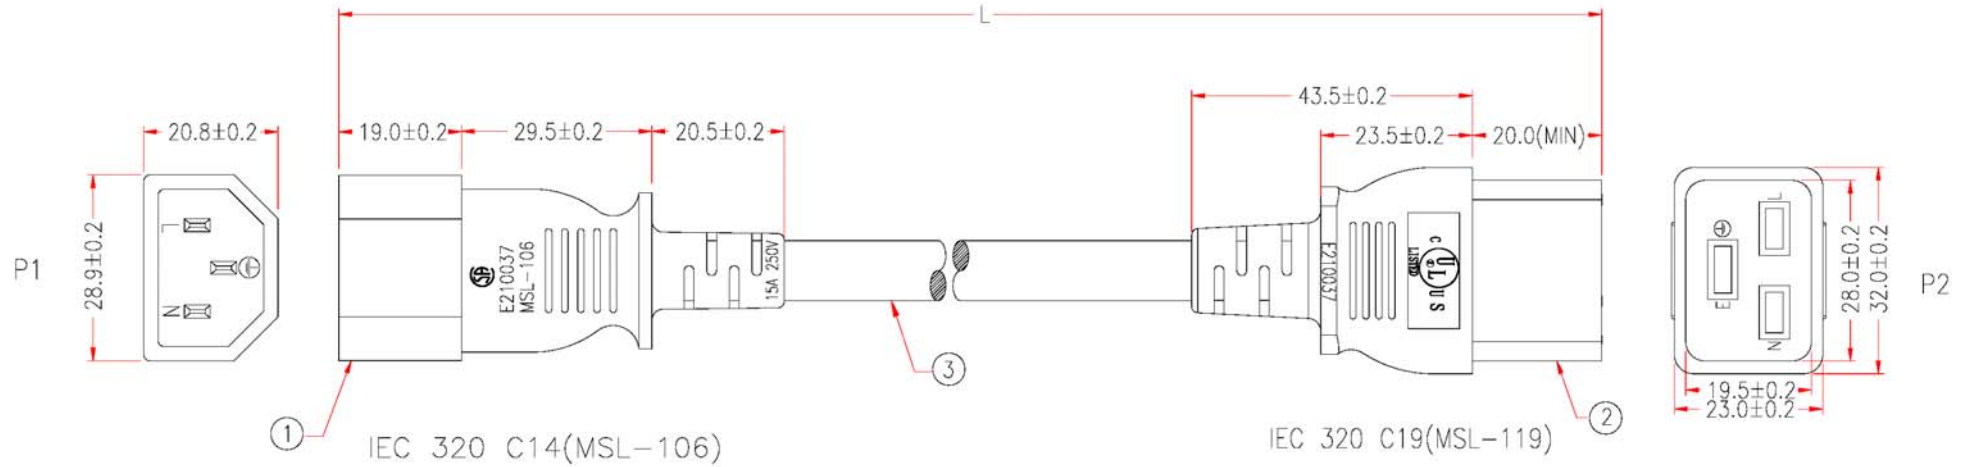

PACKING:



P1: E210037



P2: E210037



MARKING:

(UL) SJT 3/C 14AWG(2.08MM<sup>2</sup>) VW-1 105°C 300V E204978 CSA  
 SJT 3/C 2.08MM<sup>2</sup>(14AWG) FT2 105°C 300V 204790 MSL

	P1		P2
BLACK	L	—————	L
WHITE	N	—————	N
GREEN	E	—————	E

NOTE: All relevant materials are complied with RoHS directive .

3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No. EPSVT011403C-085	H5TC13-0304K09	L-40mm	M304	
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304	
	BRACKET: YST-037	A1QC36-0767	1	M767	
	TERMINAL: 98739ABS-0	A1QB33-0257	3	M257	
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304	
	BRACKET: YS-014	A1QC10-0767	1	M767	
	TERMINAL: 2x4mm 98672BS-1	A1QB07-0257	3	M257	
No.	DESCRIPTION			Q'TY	Supplier

APPROVED					Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	24/JUL/14	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	JIANG	24/JUL/14	PRODUCT NO.	P-C19C14-14A-04	
NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm					UNIT: mm