

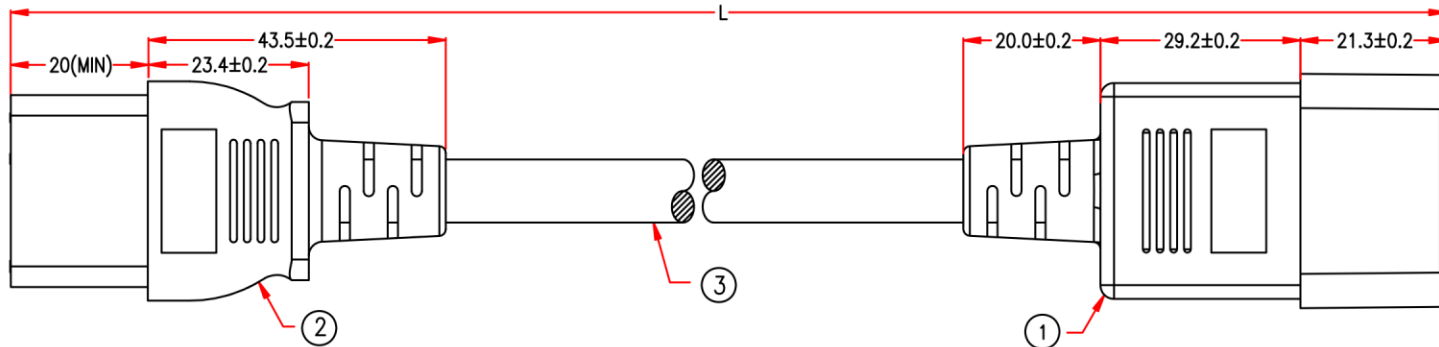


P1




P2




IEC 320 C19(MSL-119)

IEC 320 C20(MSL-120)

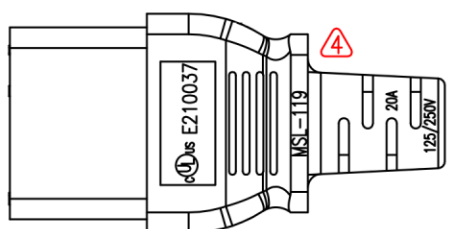




JACKET & MOLDED & BRACKET COLOR
BLACK
RED
GREEN
BLUE

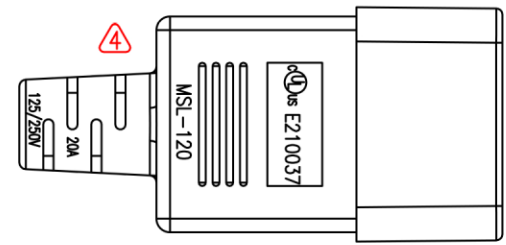

PACKING A: ≥1FT

PACKING B: ≥2FT

PACKING C: <2FT



MARKING: (UL) SJT 3/C 12AWG(3.31MM²) VW-1 105°C 300V E204978

CSA SJT 3/C 3.31MM²(12AWG) FT2 105°C 300V 204790 MSL

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

P1,P2: E210037

* NOTE: All relevant materials are complied with RoHS directive . THE MARKING IS PROTRUDING LETTERING MOULD

3	UL SJT 12AWG x 3C, OD 11.0mm, JACKET BLACK, DRAWING No.EPSJT011203C-158	H5TC41-0304K09	L-30mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304		M304
	BRACKET: YST-038	A1QC37-0767	1Set	M767
	TERMINAL: 97607BS-1	A1QB35-0257	1	M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304	1	M304
	BRACKET: YST-037	A1QC36-0767	1Set	M767
	TERMINAL: 98739ABS-0	A1QB33-0257	3	M257
No.	DESCRIPTION			Q'TY Supplier



Unless Otherwise SPEC. Tolerances:
0. ±0.5
.0 ±0.3
.00 ±0.1

REV.5 2017.07.20	MODIFY CABLE	REV.4 2015.10.12	MODIFY MOLDED
REV.3 2015.01.29	MODIFY MOLDED	REV.2 2012.10.30	MODIFY PACKING
REV.1 2012.10.19	MODIFY MOLDED		

APPROVED				
CHECKED	HU	20/JUL/17	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS
DRAWING	ZHU	20/JUL/17	PRODUCT NO.	P-C19C20-12A-XX

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm