
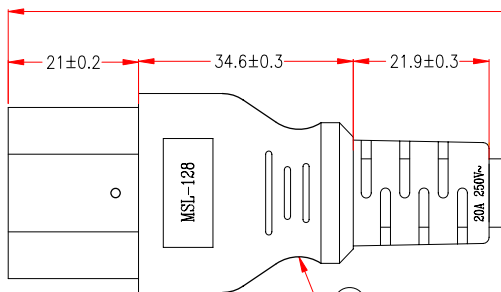




P1: M-049A

P2: M-043A



Customer No.: No.:1



IEC 320 C21(MSL-128)

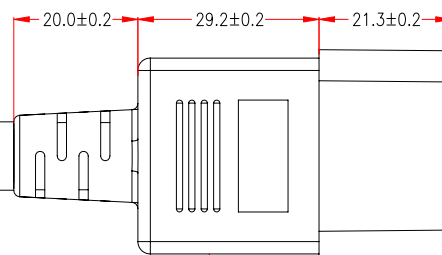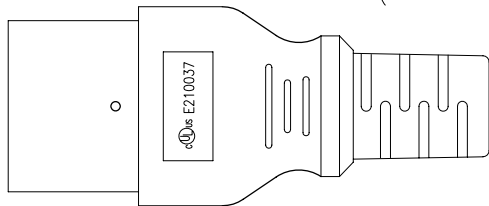

IEC 320 C20(MSL-120)



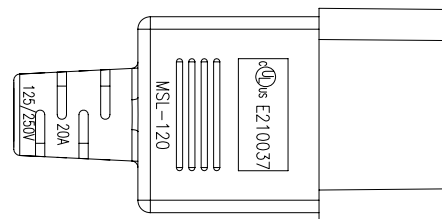


P2

PACKING A: ≥1FT

PACKING B: ≥2FT

PACKING C: <2FT



P1,P2: cULus E210037

NOTE: All relevant materials are complied with RoHS directive .

MARKING: (UL) SJT 3/C 12AWG(3.31MM²) VW-1 105°C 300V E204978

CSA SJT 3/C 3.31MM²(12AWG) FT2 105°C 300V 204790 MSL

120128B2F12A(FP258-00)

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

3	UL SJT 12AWG x 3C, OD 11.0mm, JACKET BLACK, DRAWING No. EPSVT011203C-123	H5TC16-0304K09	Xmm	M304
2	MOLDED PVC 35P, BLACK	H1BC02-0304K09		M304
	BRACKET: YST-038	A1QC37-0767K09	1	M767
	TERMINAL: 97607BS-1	A1QB35-0257	1	M257
	TERMINAL: 97606BS-1	A1QB34-0257	2	M257
1	MOLDED PVC 35P, BLACK	H1BC02-0304K09	1	M304
	BRACKET: Y-037(MSL-128)	A1QC38-0767K09	1	M767
	TERMINAL: 98739ABS-0	A1QB33-0257	3	M257
No.	DESCRIPTION		Q'TY	Supplier

APPROVED				Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU	19/JUN/17	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS
DRAWING	ZHU	19/JUN/17	PRODUCT NO.	P-C2021-XX

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm