
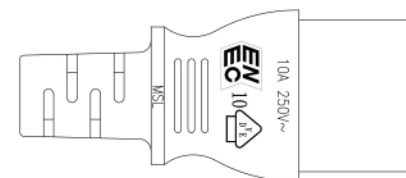


PLUG: MSL-301

CONNECTOR: MSL-107

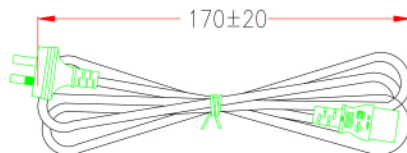

MARKING:

H05VV-F 3G 0.75mm² Ⓣ Ⓢ Ⓝ ⓕ Ⓛ Ⓜ Ⓢ KEMA-KEUR Ⓢ IEMMEQU <VDE> Ⓢ
 N20050 G TSA-3 3G 0.75mm² MSL

P1: N21404



P2:

NOTE: All relevant materials are complied with RoHS directive .

THE MARKING IS CONCAVE LETTERING MOULD

P1	P2
L	L BROWN
N	N BLUE
E	E GREEN/YELLOW

3	H05VV-F 3G 0.75mm ² G TSA-3, OD 6.8mm, JACKET BLACK, DRAWING No.EPH5V0107503C-042	H5TH04-0304K09	1810mm	M304
2	MOLDED PVC 45P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: CP-R445A-BS	A1QC61-0767	1	M767
1	TERMINAL: 2*4mm 98744BS-0/A	A1QB24-0257	3	M257
	MOLDED PVC 45P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-005	A1QC21-0767	1	M767
1	INSULATOR TERMINAL: P97658BS-1	A1QB13-0257	2	M257
	TERMINAL: 98658BS-1	A1QB21-0257	1	M257
No.	DESCRIPTION		Q'TY	Supplier

APPROVED						Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	14/SEP/17	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS		
DRAWING	ZHU	14/SEP/17	PRODUCT NO.	P7AU-06		

REV.3 2017.09.14 MODIFY CABLE & MOLDED LOGO & ENGTH

REV.1 2010.07.20 MODIFY PLUG: MSL-301 PIN APPEAR SIZE REV.2 2011.04.12 MODIFY P1&P2 MODEL WORD

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm