

MARKING:


(UL) SVT 3/C 18AWG(0.824MM²) VW-1 105°C 300V E204978 CSA SVT 3/C 0.824MM²(18AWG) FT2 105°C 300V 204790 MSL

	P1		P2
BLACK	L	—————	L
WHITE	N	—————	N
GREEN	E	—————	E

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION			Q'TY	Supplier
3	UL SVT 18AWG*3C, OD 6.3mm, JACKET BLACK, DRAWING No. EPSVT011803C-017			1800mm	M304
2	MOLDED PVC BLACK, 35P				M304
	BRACKET: YS-003			1	M767
1	TERMINAL: 2*4mm 98744BS-0/A			3	M257
	MOLDED PVC BLACK, 35P				M304
	BRACKET: YS-002			1	M767
1	TERMINAL: 98661BS-1			2	M257
	TERMINAL: ø4.75, 98475BS-1			1	M257
APPROVED					Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	05/AUG/16	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	XIAO	05/AUG/16	PRODUCT NO.	P7B1-06	UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

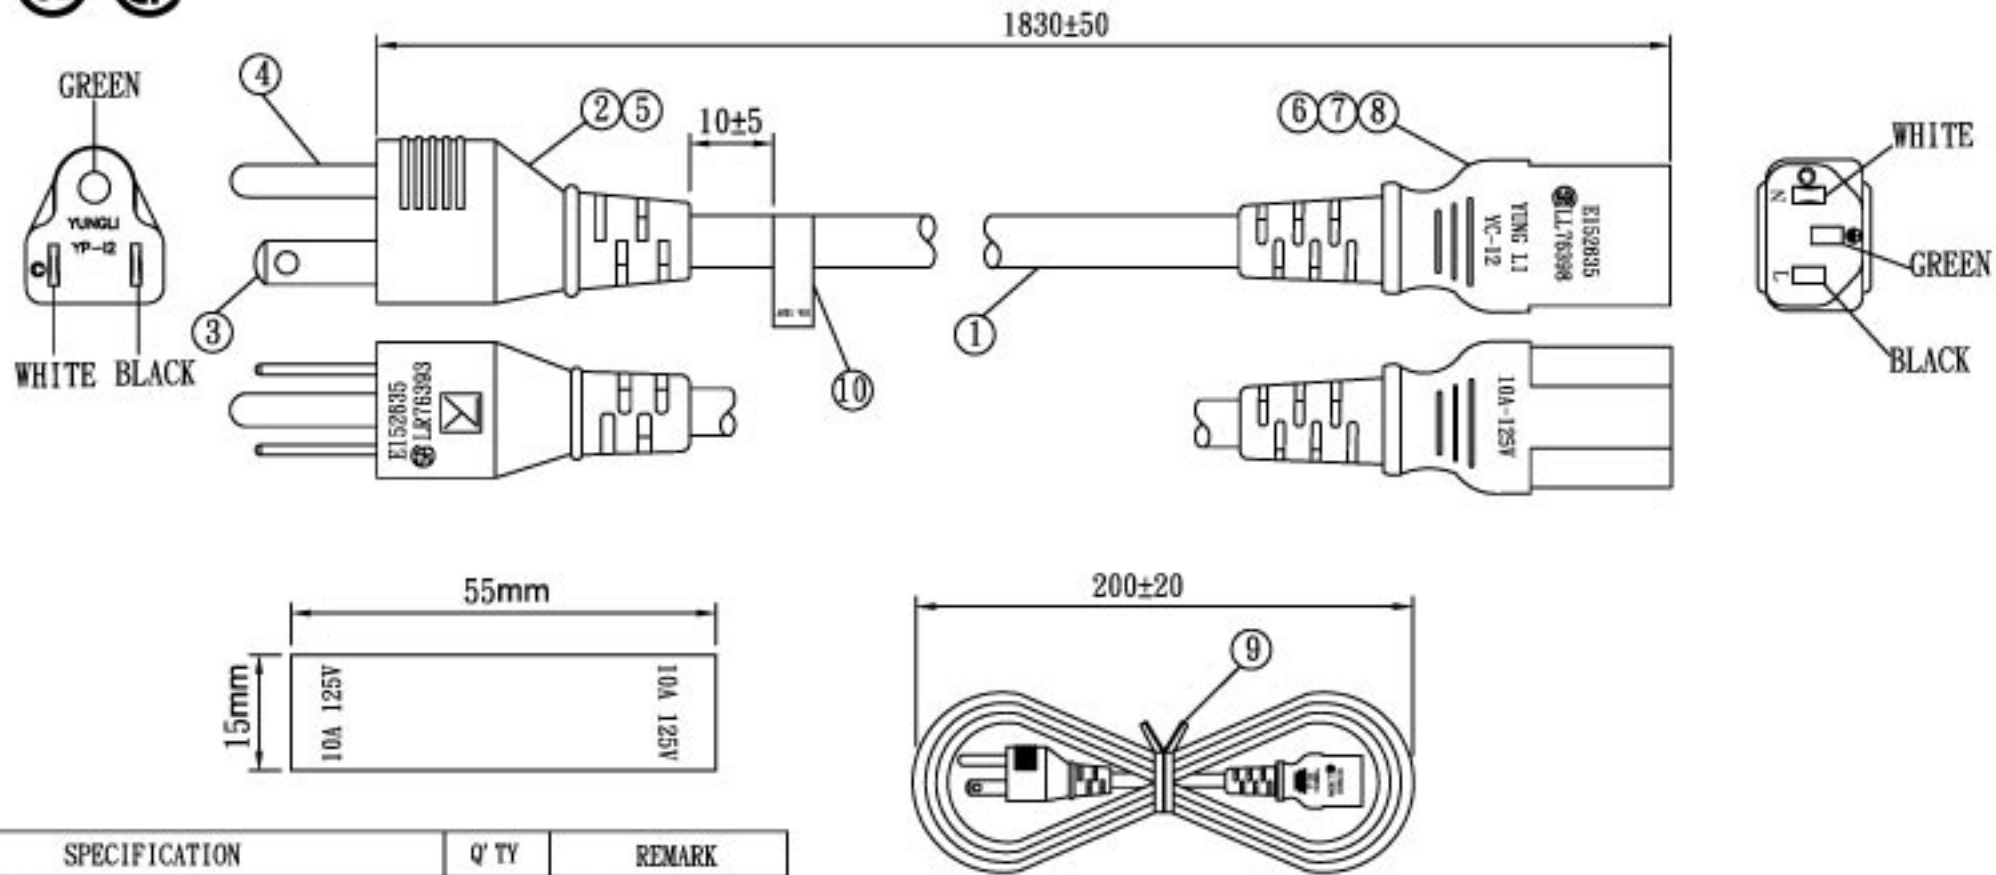

NO.	SPECIFICATION	Q' TY	REMARK
1	SVT 18/3C 105°C BLACK	1PC	1810±20(YL)
2	YP-12 PVC PLASTIC 35P BLACK	18g/PC	
3	TERMINAL:98675BS-1/KDF 50T-2	2PCS	
4	∅4.75 TERMINAL:98475	1PC	
5	YP-12 INNER BODY	1PC	
6	YC-12 PVC PLASTIC 35P BLACK	18g/PC	
7	U-TYPE TERMINAL:97740	3PCS	
8	YC-12 INNER BODY	1PC	
9	MINI TIE:L=130mm BLACK	1PC	
10	LABEL:55*15mm	1PC	

Tolerance >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	Approved		Date		SF Cable, Inc 1-888-275-8755			
	Checked		Date					
	Drawn	YUANJUN	Date	08.08.19	Customer			
	Cat. No.	YP-12/YC-12			P/N.	P-06B-EN		
	Drawing No.	CY-U0032		Rev.	B	Material	P. V. C	Unit
					Scale			