



P1: M-003
 P2,P3: M-005
 P4: M-008

Customer No.: No.1

P/N	Length(L)	Length(X)
10W1-165P13Y-03	737mm	178mm
10W1-165P13Y-06	1220mm	610mm
10W1-165P13Y-10	2438mm	610mm

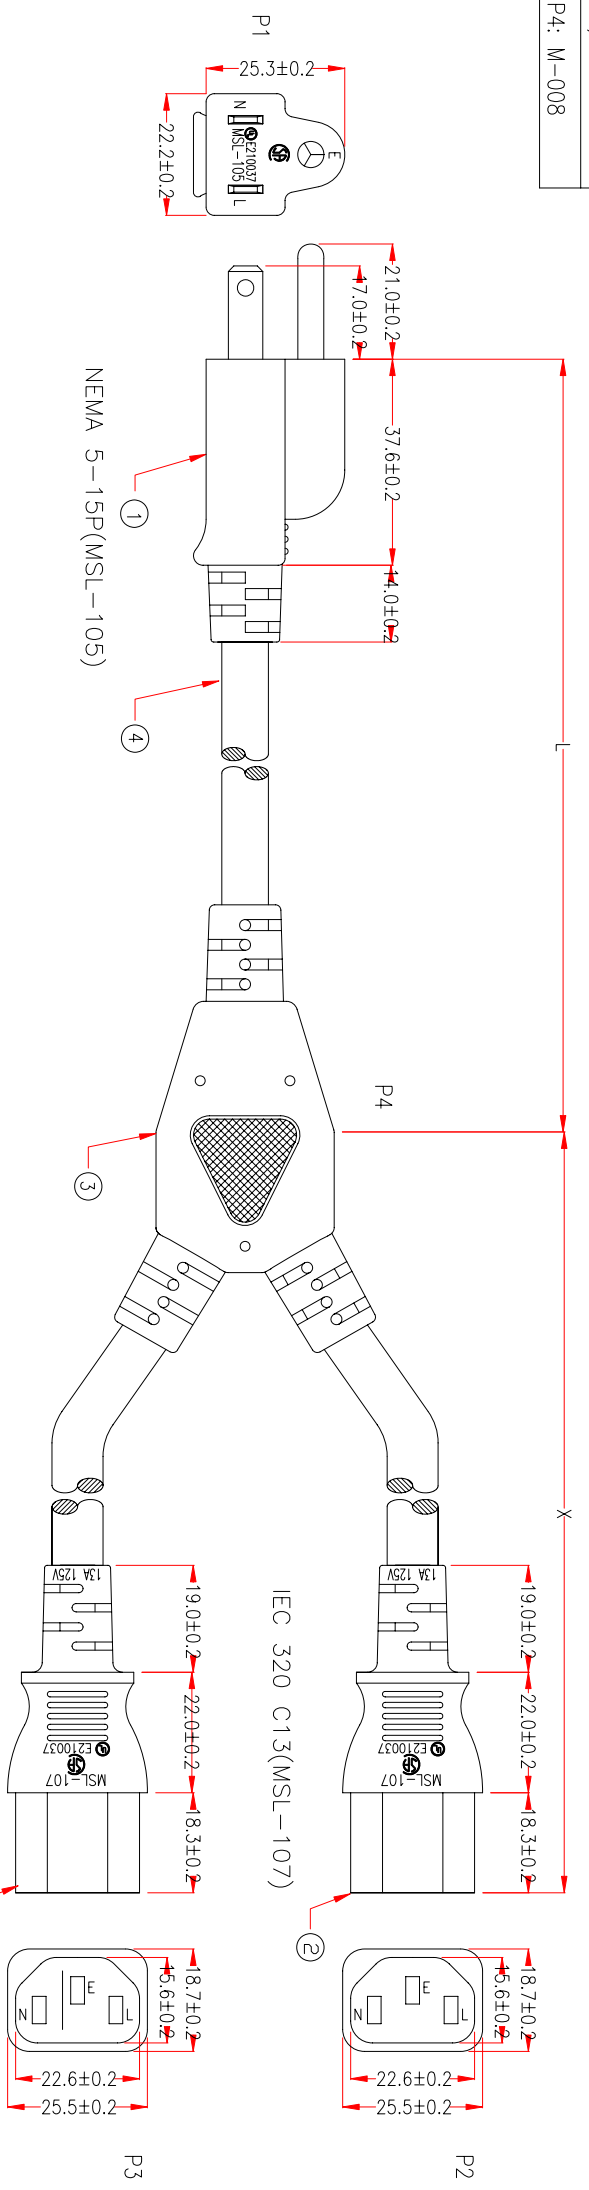

PACKING:



MARKING:

(UL) SUT 3/C 16AWG(1.31MM²) VW-1 75°C 300V E204978
 CSA SUT 3/C 1.31MM²(16AWG) FT2 60°C 300V 204790 MSL

P1	P2	P3
BLACK L	L	L
WHITE N	N	N
GREEN E	E	N

*NOTE: All relevant materials are complied with RoHS directive .

P1,P2,P3: E210037
 P4: E210037

No.	DESCRIPTION	Q'Ty	Supplier
1	UL SUT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No.EF5VT011603C-011	1	M257
2	MOULDED PVC 35P, COLOR BLACK	6	M257
3	BRACKET: YS-021	1	M767
4	TERMINAL: 96146BS-0	3	M257
1	MOULDED PVC 35P, COLOR BLACK	2	M304
2	BRACKET: YS-003	2	M767
3	TERMINAL: 2*4mm, 98744BS-0/A	6	M257
4	MOULDED PVC 35P, COLOR BLACK	1	M304
5	BRACKET: YS-002	1	M767
6	TERMINAL: 98661BS-1	2	M257
7	TERMINAL: 4.75mm, 98475BS-1	1	M257

APPROVED	CHECKED	DRAWING	DATE	PRODUCT NO.	DESCRIPTION
HU	HU	LJU	03/MAY/16	P7B1-XY-16-XX	



Unless Otherwise Spec. Tolerances:
 0, ±0.5
 .0, ±0.3
 .00, ±0.1

UNIT: mm