


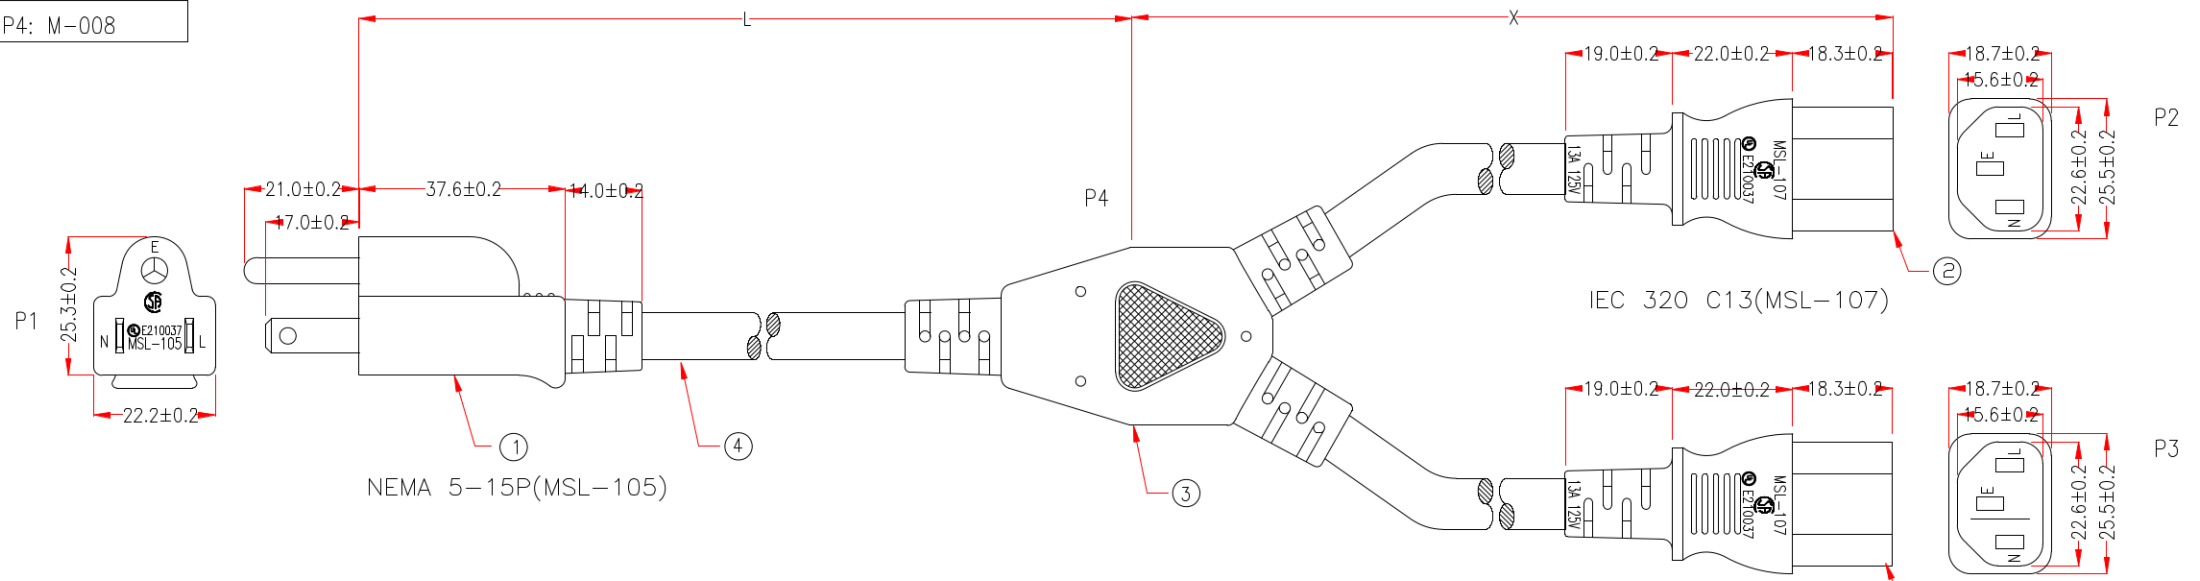


P1: M-003  
 P2,P3: M-005  
 P4: M-008



Length(L)	Length(X)
737mm	178mm
1220mm	610mm
2438mm	610mm

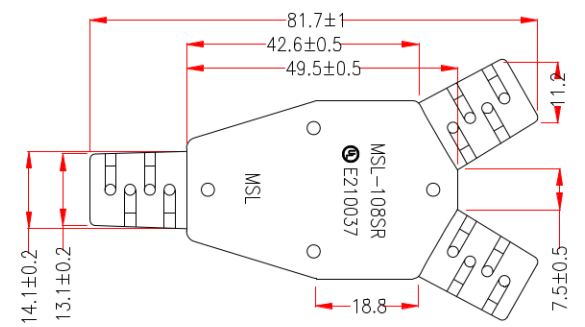

MARKING:  
 (UL) SJT 3/C 16AWG(1.31MM<sup>2</sup>) VW-1 75°C 300V E204978  
 CSA SJT 3/C 1.31MM<sup>2</sup>(16AWG) FT2 60°C 300V 204790 MSL

	P1	P2	P3
BLACK	L	L	L
WHITE	N	N	N
GREEN	E	E	E

P1,P2,P3: E210037   
 P4: E210037

\*NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
4	UL SJT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No.EPSVT011603C-011	L-10mm*1PCS X-10mm*2PCS	M304
3	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-021	1	M767
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-003	2	M767
1	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-002	1	M767
	TERMINAL: 4.75mm, 98475BS-1	1	M257

APPROVED					Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	03/MAY/16			
DRAWING	LIU	03/MAY/16	PRODUCT NO.	P7B1-YY-16-XX	UNIT: mm