





P1:	M-Y084A
	M-084A
P2,P3:	M-005
P4:	M-008

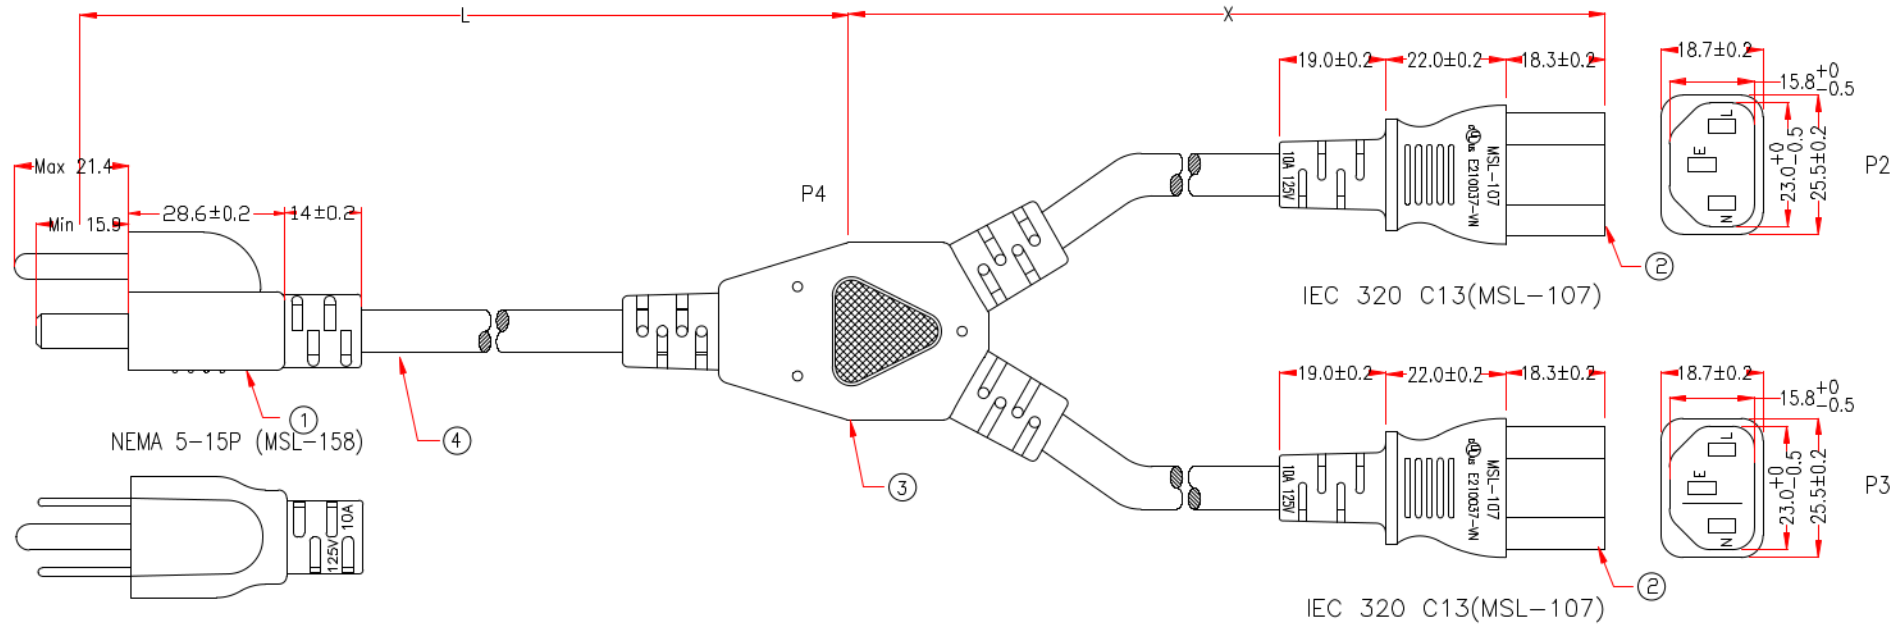

PACKING A: <3M




PACKING B: >3M



MARKING:

(UL)SJT 3/C 18AWG(0.824MM<sup>2</sup>)VW-1 75°C 300V E204978  
 C(UL) SJT 3/C 0.824MM<sup>2</sup>(18AWG) FT2 60°C 300V E204978 MSL-VN-

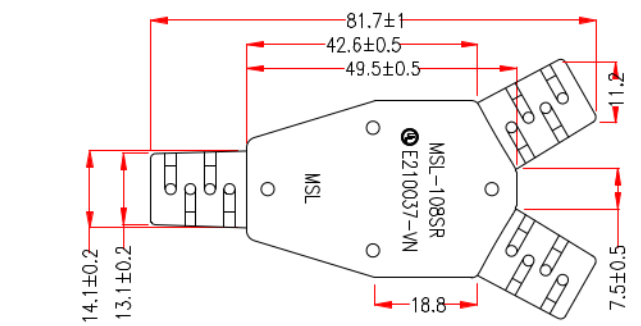

	P1	P2	P3
BLACK	L	L	L
WHITE	N	N	N
GREEN	E	E	E

P1,P2,P3: E210037-VN  
 P4: E210037-VN

\*NOTE: All relevant materials are complied with RoHS directive .  
 THE MARKING IS CONCAVE LETTERING MOULD

No.	DESCRIPTION	Q'TY	Supplier	
4	UL SJT 18AWG x 3C, OD 7.8mm, JACKET BLACK, DRAWING No.EPSJT011803C-159	H5TC42-0304K09	L-10mm*1PCS X-10mm*2PCS	M304
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
3	BRACKET: YS-021	A1QC18-0767	1	M767
	TERMINAL: 96146BS-0	A1QB17-0257	3	M257
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-003	A1QC14-0767	2	M767
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	TERMINAL WITH BRACKET: M87629LA-3PB	A1QC82-0257K09	1	M257

APPROVED	
CHECKED	HU
DESIGNER	XJW
DRAWING	ZHU
DATE	09/NOV/21



Cable Length Unless Other Spec.	
Tolerances:	
0 ~200mm	±10mm
201~1000mm	±20mm
1001~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

ITEM NO. P7B1-YY-18-XX

UNIT: mm