


P1: M-003

P2: M-005B

Customer No.: No.1

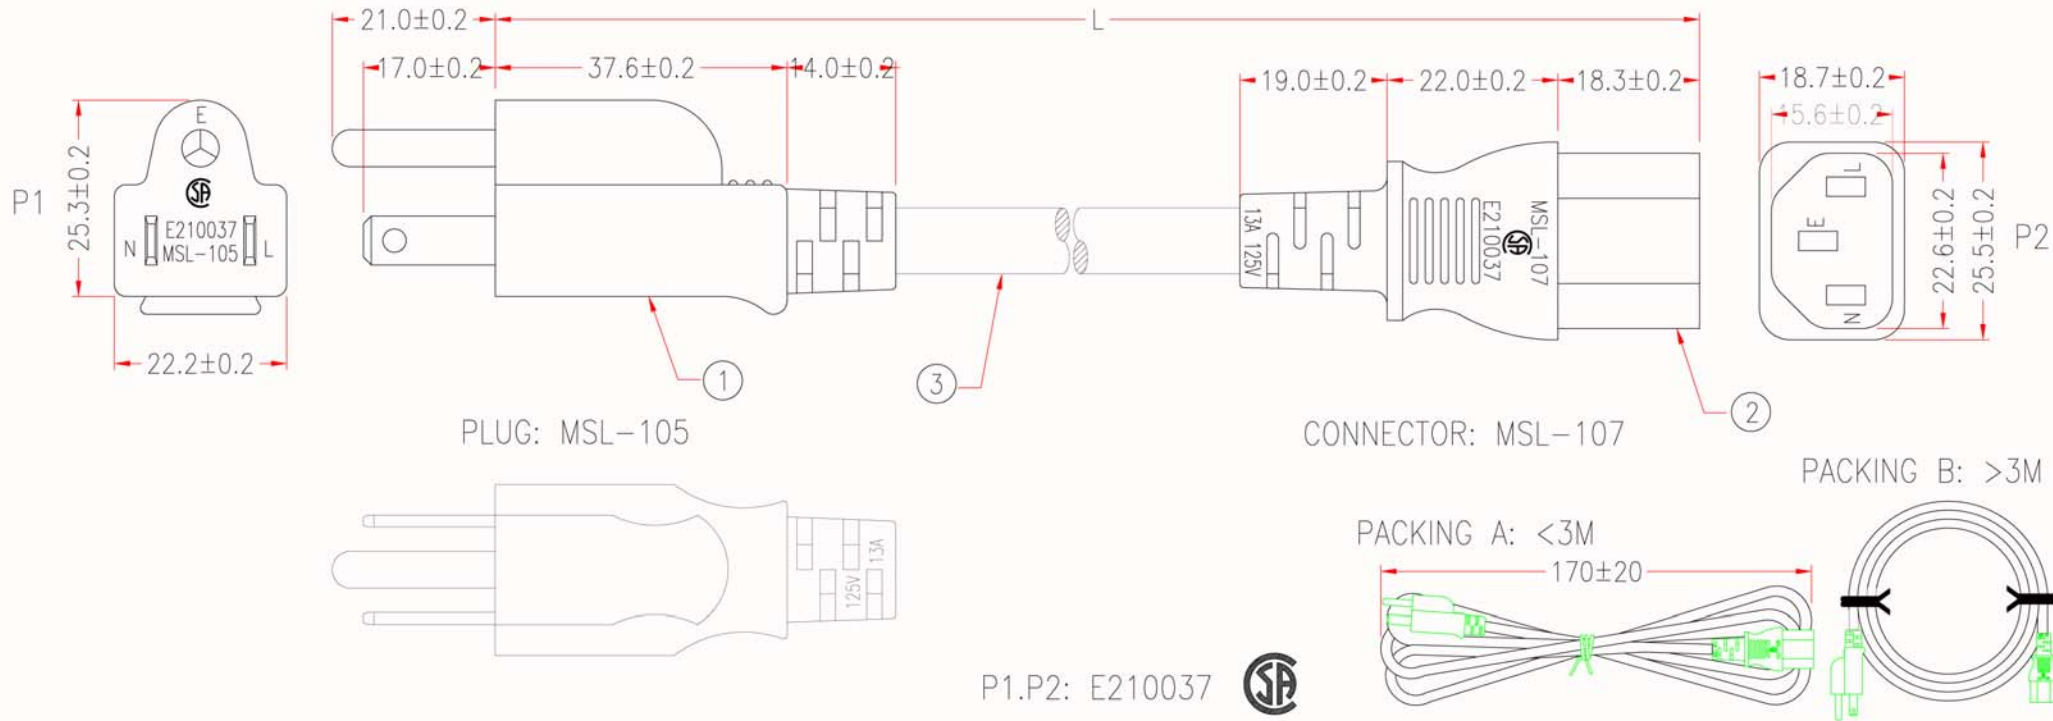

PLUG: MSL-105

CONNECTOR: MSL-107

PACKING B: >3M

PACKING A: <3M

CABLE MARKING:

(UL) SJT 3/C 16AWG(1.31MM²) VW-1 105°C 300V E204978 CSA
 SJT 3/C 1.31MM²(16AWG) FT2 105°C 300V 204790 MSL



P1.P2: E210037



NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No. EPSVT011603C-077	L-30mm	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-003	1	M767
	TERMINAL: 2*4mm, 98744BS-0/A	3	M257
1	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-002	1	M767
	TERMINAL: 98661BS-1	2	M257
	TERMINAL: ø4.75, 321203	1	M769

APPROVED			www.sfcable.com		Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	29/MAR/10	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	JIANG	29/MAR/10	PRODUCT NO.	P7C16-XX	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm