


P1: M-018

P2: M-006

Customer No.:

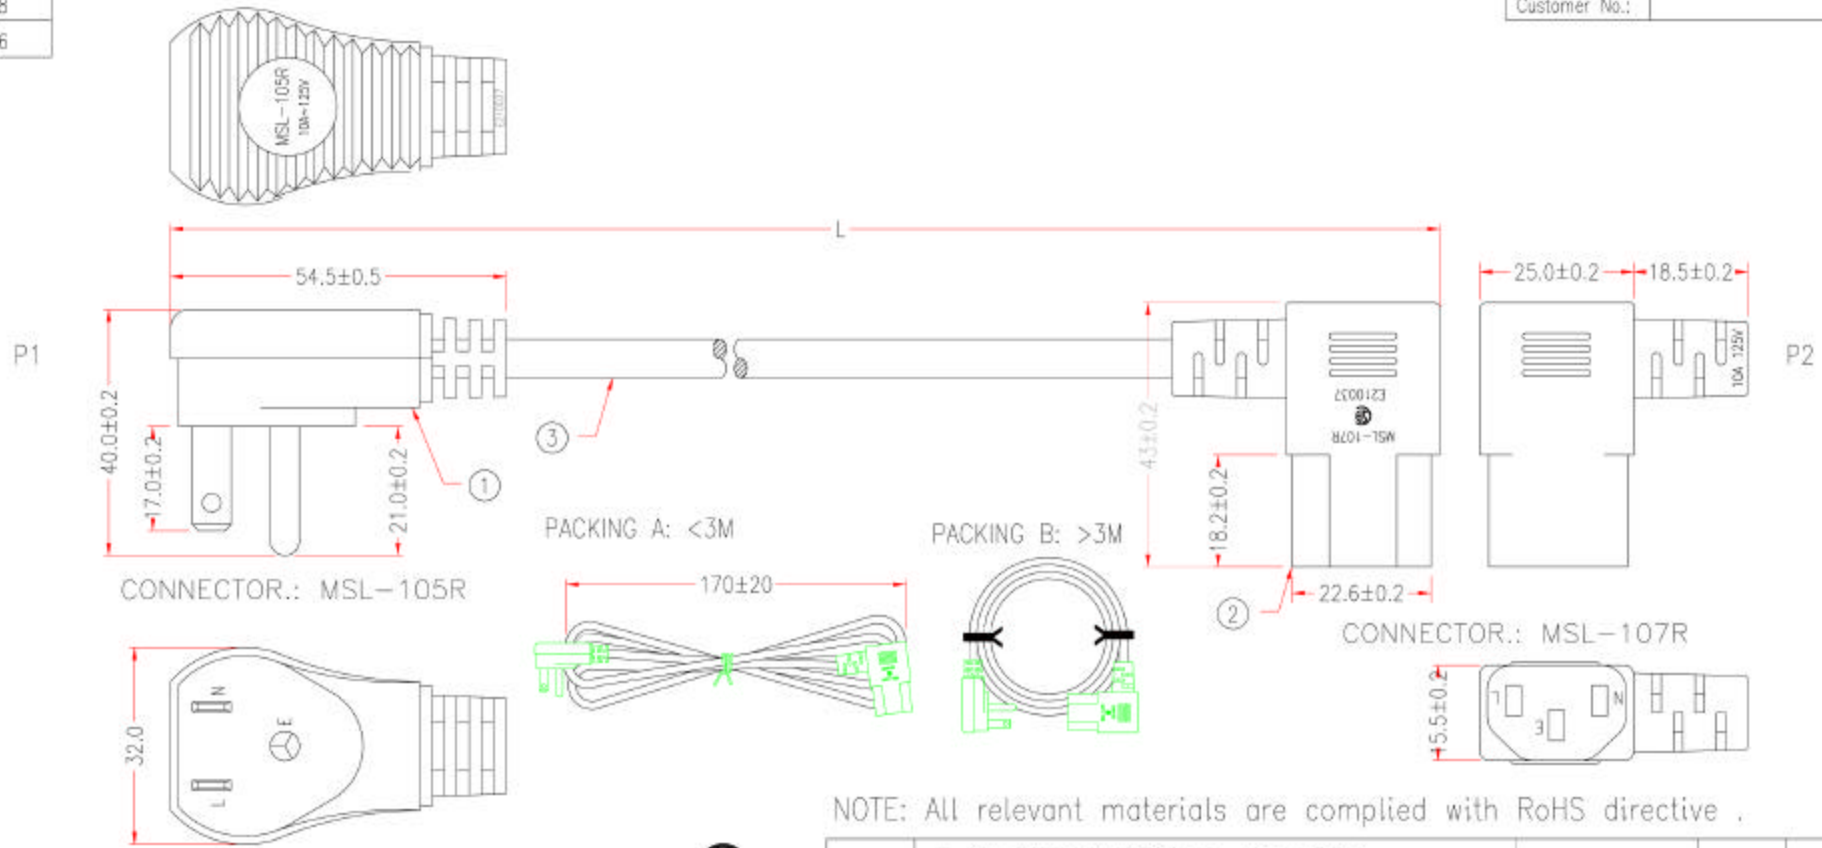

CONNECTOR.: MSL-105R

CONNECTOR.: MSL-107R

CABLE MARKING:

(UL) SVT 3/C 18AWG(0.824MM²) VW-1 75°C 300V E204978 CSA
 SVT 3/C 0.824MM²(18AWG) FT2 60°C 300V 204790 MSL

P2: E210037 

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	QTY	Supplier
3	UL SVT 18AWG*3C, OD 6.3mm, JACKET BLACK, DRAWING No. EPSVT011803C-008	Lmm	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-003	1	M767
1	TERMINAL: 2*4mm, 98744BS-0/A	3	M257
	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-032	1	M767
	TERMINAL: 98661BS-1	2	M257
	TERMINAL: ø4.75mm, 321203	1	M769

	P1	P2
BLACK	L	L
WHITE	N	N
GREEN	E	E

APPROVED			SFCABLE.COM		Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	23/SEP/11	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	JIANG	23/SEP/11	PRODUCT NO.	P7CR-RRXX	UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm