



P1: M-018

P2: M-005B

Customer No.:



P1

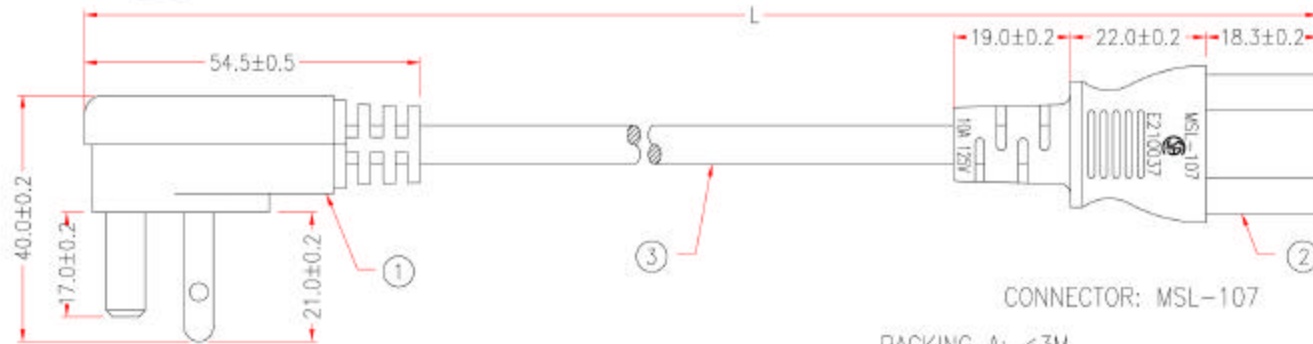

CONNECTOR.: MSL-105R


CONNECTOR: MSL-107

PACKING A: <3M



P2

PACKING B: >3M

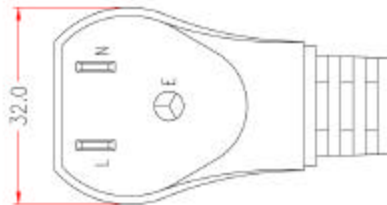



P2: E210037



CABLE MARKING:

(UL) SVT 3/C 18AWG(0.824MM<sup>2</sup>) VW-1 75°C 300V E204978 CSA  
 SVT 3/C 0.824MM<sup>2</sup>(18AWG) FT2 60°C 300V 204790 MSL

	P1		P2
BLACK	L	————	L
WHITE	N	————	N
GREEN	E	————	E

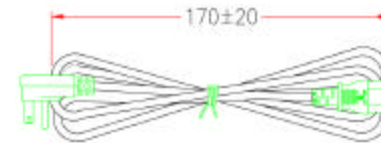

NOTE: All relevant materials are complied with RoHS directive .

3	UL SVT 18AWG*3C, OD 6.3mm, JACKET BLACK, DRAWING No. EPSVT011803C-008	H5TB02-0304K09	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-003	A1QC14-0767	1	M767
1	TERMINAL: 2*4mm, 98744BS-0/A	A1QB24-0257	3	M257
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-032	A1QC28-0767	1	M767
	TERMINAL: 98661BS-1	A1QB01-0257	2	M257
	TERMINAL: ø4.75mm, 321203	A1QB06-0769	1	M769
No.	DESCRIPTION		QTY	Supplier

APPROVED			<b>SFCABLE.COM</b>		Unless Otherwise SPEC. Tolerances: 0.     ±0.5 .0     ±0.3 .00    ±0.1
CHECKED	HU	05/SEP/11	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	JIANG	05/SEP/11	PRODUCT NO.	<b>P7CR-SRXX</b>	
					UNIT: mm

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm