

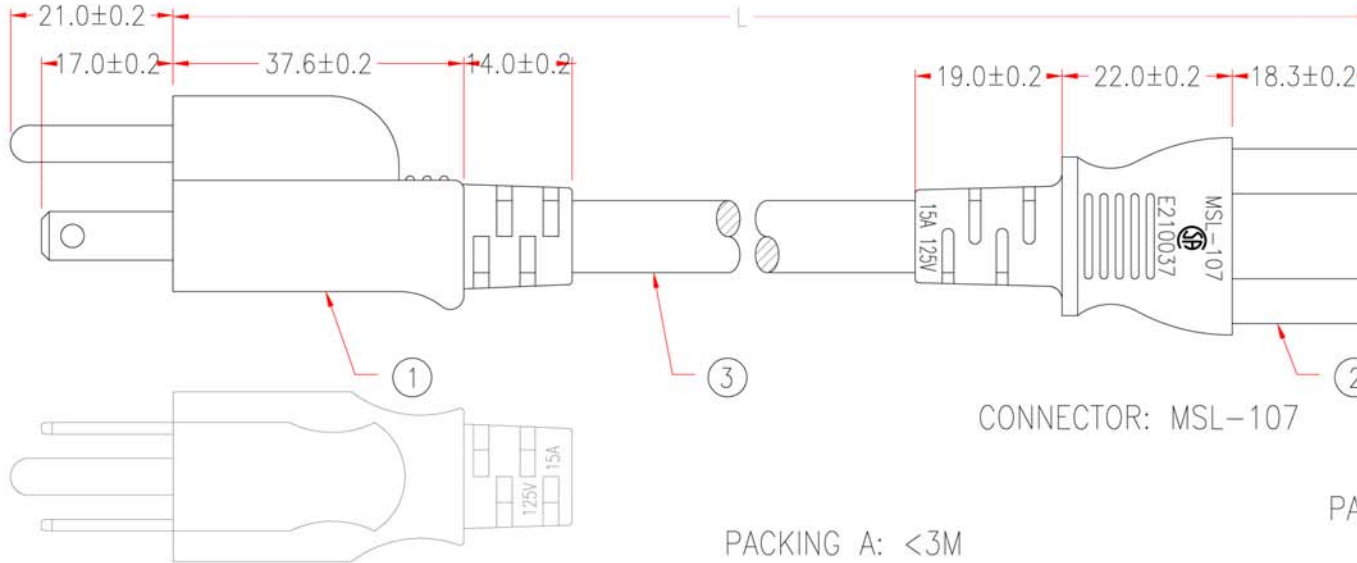


P1: M-003

P2: M-005


Customer No.: No. 1




PLUG: MSL-105

CONNECTOR: MSL-107

PACKING A: <3M

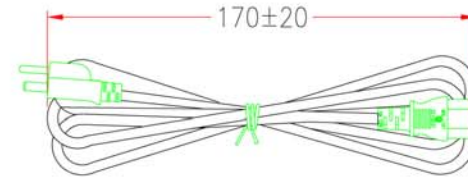

PACKING B: >3M



P1.P2: E210037

MARKING:

(UL) SJT 3/C 14AWG(2.08MM²) VW-1 75°C 300V E204978 CSA
SJT 3/C 2.08MM² (14AWG) FT2 60°C 300V 204790 MSL

| | | | |
|-------|----|-------|----|
| | P1 | | P2 |
| BLACK | L | _____ | L |
| WHITE | N | _____ | N |
| GREEN | E | _____ | E |

*NOTE: All relevant materials are complied with RoHS directive .

| | | | |
|-----|---|--------|----------|
| 3 | UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No. EPSVT011403C-012 | L-30mm | M304 |
| 2 | MOLDED PVC 35P, COLOR BLACK | | M304 |
| | BRACKET: YS-003 | 1 | M767 |
| | TERMINAL: 2*4mm, 98744BS-0/A | 3 | M257 |
| 1 | MOLDED PVC 35P, COLOR BLACK | | M304 |
| | BRACKET: YS-002 | 1 | M767 |
| | TERMINAL: 98661BS-1 | 2 | M257 |
| | TERMINAL: ø4.75mm 321203 | 1 | M769 |
| No. | DESCRIPTION | Q'TY | Supplier |

| | | | | | |
|----------|-------|-----------|------------------------------|---------------------------------|--|
| APPROVED | | | SF CABLE, INC 1-888-275-8755 | | Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1 |
| CHECKED | HU | 24/AUG/11 | DRAWN NAME | POWER SUPPLY CORDS & CORDS SETS | |
| DRAWING | JIANG | 24/AUG/11 | PRODUCT NO. | P7D14-XX | |

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm