




P1: M-004
P2: M-005

Customer No.: _____

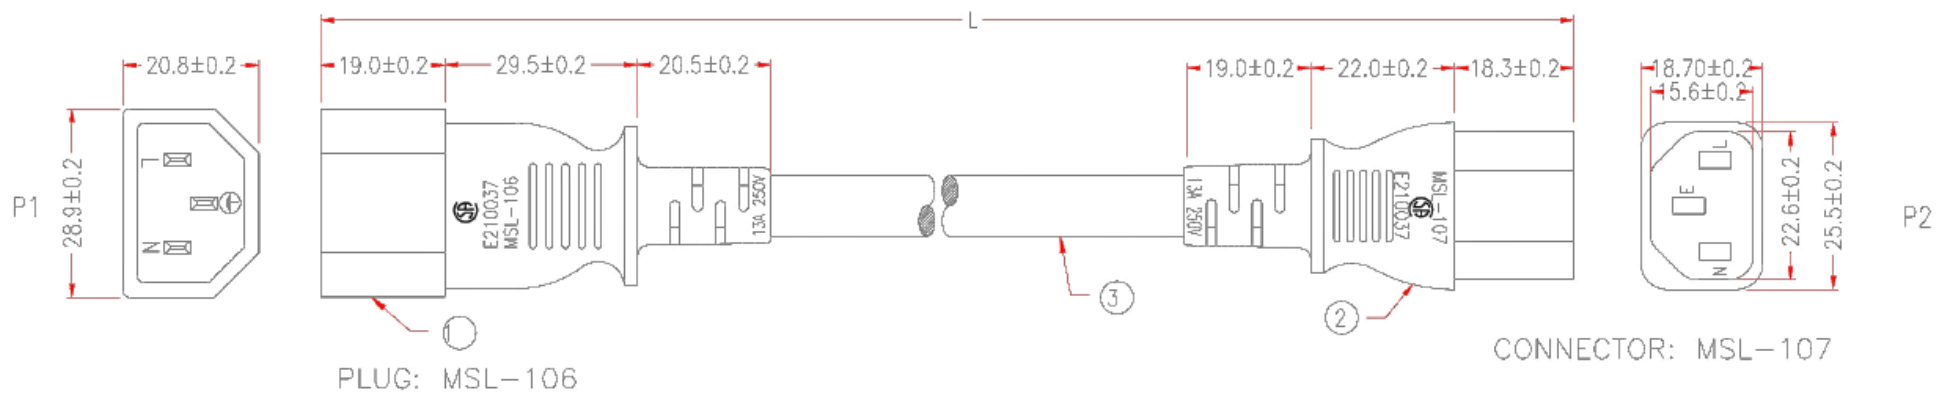

PACKING A: <3M

PACKING B: >3M

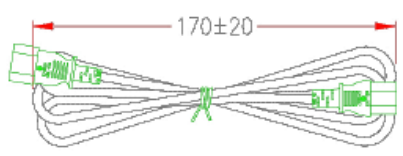

MARKING: ⚠

(UL) SJT 3/C 16AWG(1.31MM²) VW-1 105°C 300V E204978 CSA SJT 3/C 1.31MM²(16AWG) FT2 105°C 300V 204790 MSL

	P1		P2
BLACK	L	_____	L
WHITE	N	_____	N
GREEN	E	_____	E

P1,P2: E210037

NOTE: All relevant materials are complied with RoHS directive .

3	UL SJT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No. EPSVT011603C-077	H5TC15-0304K09	L-40mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-003	A1QC14-0767	1	M767
	TERMINAL: 2*4mm 98744BS-0/A	A1QB24-0257	3	M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-014	A1QC10-0767	1	M767
	TERMINAL: 2*4mm 98672BS-1	A1QB07-0257	3	M257

No.	DESCRIPTION			Q'TY	Supplier
APPROVED			SFCABLE.COM		Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	14/NOV/11	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	JIANG	14/NOV/11	PRODUCT NO.	P7ME-C16-03	

REV.1 2011.11.14 | MODIFY CABLE MARKING

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIL: mm