


P1: M-004



P2: M-005

Customer No.:

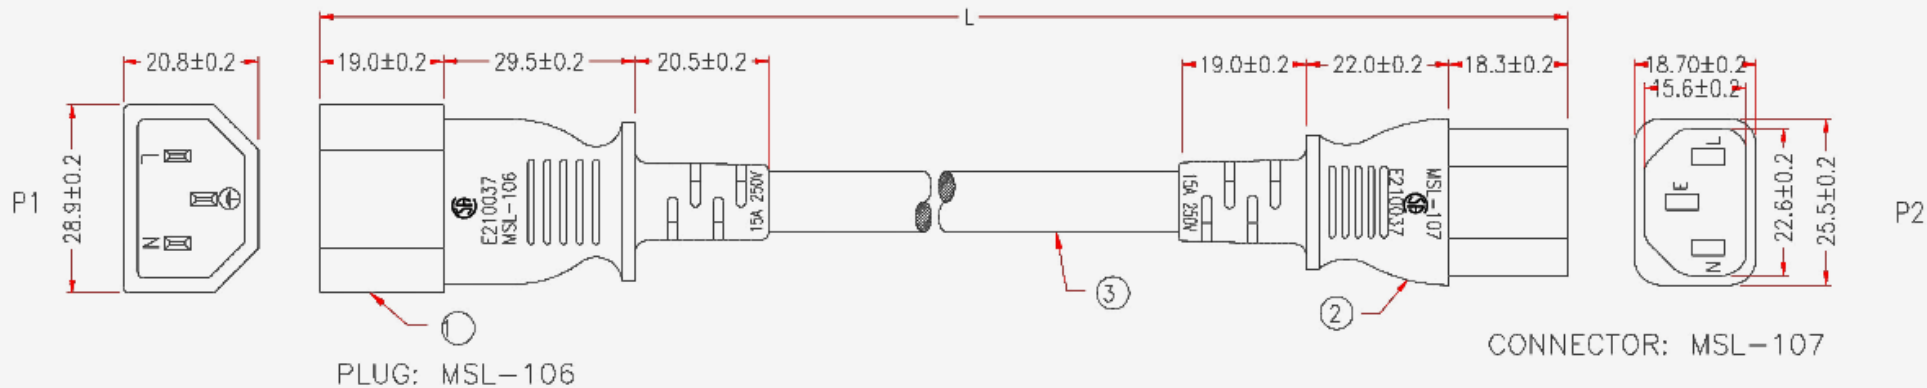

PACKING A: <3M


PACKING B: >3M

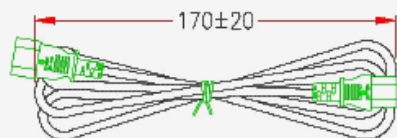

MARKING: Δ

(UL) SJT 3/C 14AWG(2.08MM²) VW-1 105°C 300V E204978 CSA
SJT 3/C 2.08MM²(14AWG) FT2 105°C 300V 204790 MSL

	P1	P2
BLACK	L	L
WHITE	N	N
GREEN	E	E

P1,P2: E210037 

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 14AWG*3C, OD 9.3mm, JACKET BLACK, DRAWING No. EPSYT011403C-085	L-40mm	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-003	1	M767
1	TERMINAL: 2*4mm 98744BS-0/A	3	M257
	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-014	1	M767
	TERMINAL: 2x4mm 98672BS-1	3	M257

APPROVED	SFCable.com			Unless Otherwise SPEC. Tolerances:
CHECKED	HU	14/NOV/11	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS
DRAWING	JIANG	14/NOV/11	PRODUCI NO.	P7ME-D14-XX
				0. ±0.5 .0 ±0.3 .00 ±0.1

REV.1 2011.11.14 MODIFY CABLE MARKING

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNII: mm