


P1: M-004

P2: M-005

Customer No.: No.1

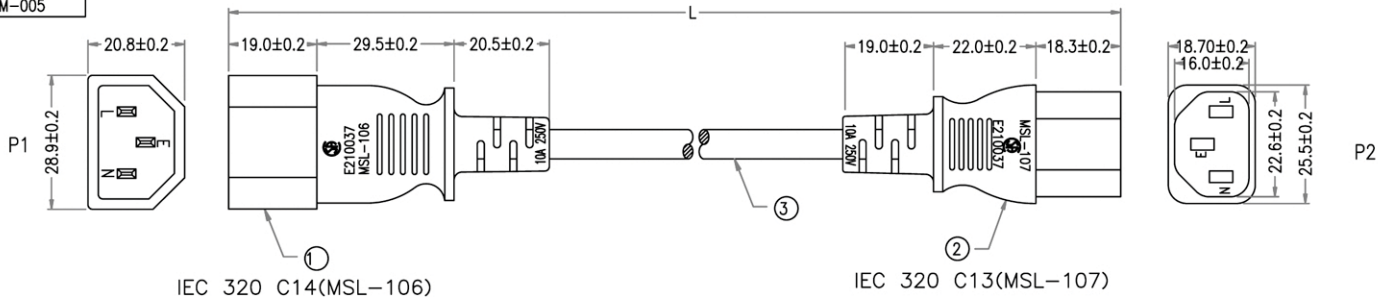

MARKING: (UL) SVT 3/C 18AWG(0.824MM²) VW-1 105°C 300V E204978 CSA
SVT 3/C 0.824MM²(18AWG) FT2 105°C 300V 204790 MSL

P1,P2: E210037

*NOTE: All relevant materials are complied with RoHS directive .

	P1		P2
BLACK	L	————	L
WHITE	N	————	N
GREEN	E	————	E

3	UL SVT 18AWG x 3C, OD. 6.3mm, JACKET BLACK, DRAWING No. EPSYT011803C-017	H5TB11-0304K09	L-40mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-003	A1QC14-0767	1	M767
	TERMINAL: 2*4mm 98744BS-0/A	A1QB24-0257	3	M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-014	A1QC10-0767	1	M767
	TERMINAL: 2x4mm 98672BS-1	A1QB07-0257	3	M257
No.	營業一部	DESCRIPTION	Q'TY	Supplie

APPROVED	2014.08.27			Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1	
CHECKED	FU				27/AUG/14
DRAWING	ZHU	27/AUG/14	PRODUCT NO.		P7ME-XX

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm