



P1: M-003
P2: M-028A

Customer No.: NO:1 M709-02-XX

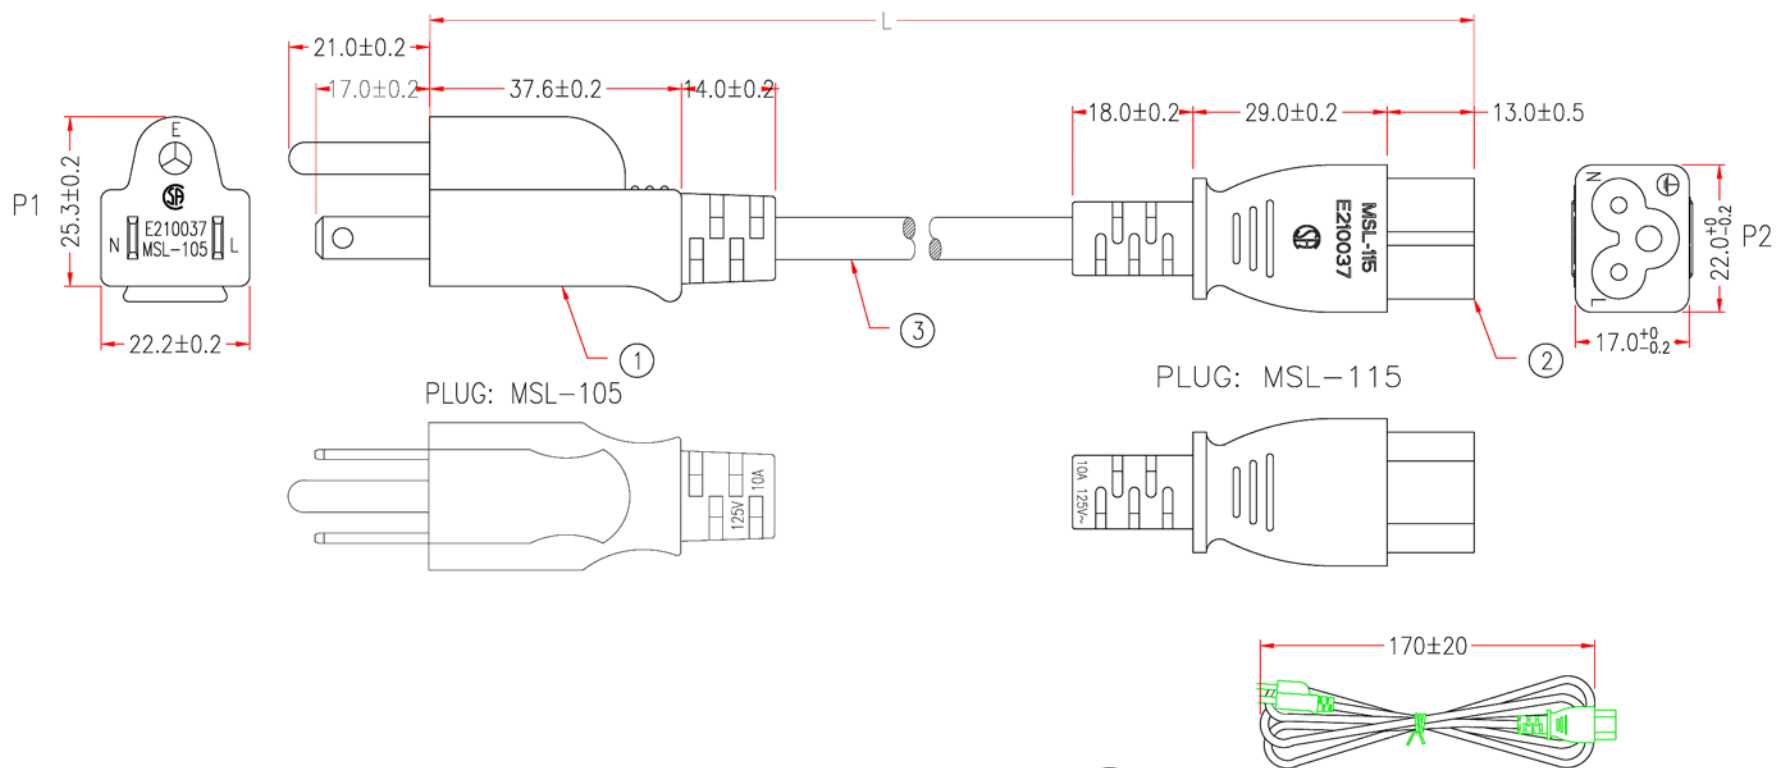

P1.P2: E210037 

NOTE: All relevant materials are complied with RoHS directive .

MARKING:

(UL) SVT 3/C 18AWG(0.824MM²) VW-1 75°C 300V E204978
CSA SVT 3/C 0.824MM²(18AWG) FT2 60°C 300V 204790 MSL

	P1		P2
BLACK	L	—————	L
WHITE	N	—————	N
GREEN	E	—————	E

3	UL SVT 18AWG x 3C, OD 6.3mm, JACKET BLACK, DRAWING No.EPSVT011803C-008	L-20mm	M30
2	MOLDED PVC 35P, COLOR BLACK		M30
	BRACKET: YS-008	1	M76
	TERMINAL: 98732PS-0	1	M25
1	TERMINAL: 98714PS-0	2	M25
	MOLDED PVC BLACK, 35P		M30
	BRACKET: YS-002	1	M76
1	TERMINAL: 98661BS-1	2	M25
	TERMINAL: Ø4.75mm 321203	1	M76
No.	DESCRIPTION	Q'TY	Supp

APPROVED			SFCable.com		Unless Otherwise SPEC. Tolerances 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	20/APR/10	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	CHEN	20/APR/10	PRODUCT NO.	P7N3-XX	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

 UNIT: m