



P1:	M-Y093A
	M-093A
P2:	M-028A

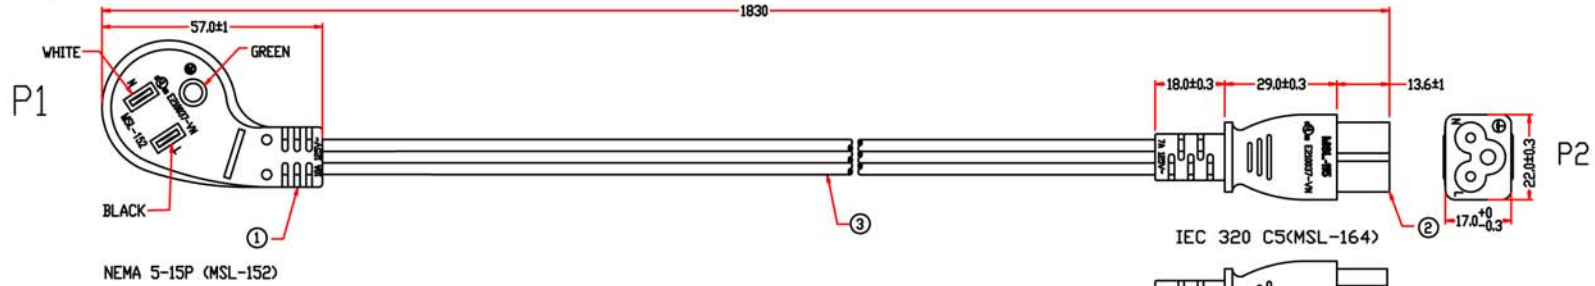

NEMA 5-15P (MSL-152)

IEC 320 C5 (MSL-164)


PACKING:



PACKING: 1PCS IN A POLYBAG



LABEL

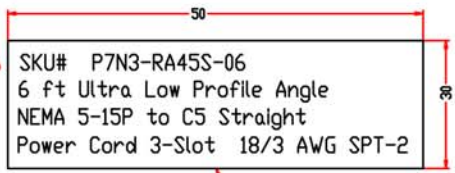


LABEL

P/N	L	COLOR
P7N3-RA45S-01-BLK	1F	Black
P7N3-RA45S-01-WHT	1F	White(W49)
P7N3-RA45S-02-BLK	2F	Black
P7N3-RA45S-02-WHT	2F	White(W49)
P7N3-RA45S-03-BLK	3F	Black
P7N3-RA45S-03-WHT	3F	White(W49)
P7N3-RA45S-06-BLK	6F	Black
P7N3-RA45S-06-WHT	6F	White(W49)

MARKING:

(UL) SPT-2 3/C 18AWG(0.824MM²) VW-1 105°C 300V E204978
 (CUL) SPT-2 3/C 0.824MM²(18AWG) FT2 105°C 300V E204978
 MSL-VN- GREEN CONDUCTOR FOR GROUNDING ONLY

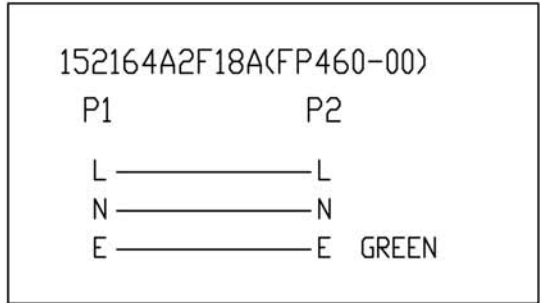

* NOTE: ALL relevant materials are complied with RoHS directive.
 the individually bagged cords will be placed in bags of 10 pieces

No.	DESCRIPTION	Q'TY	Supplier
3	UL SPT-2 18AWG x 3C, OD 4.2±0.5mm, JACKET COLOR SEE LIST, DRAWING No. EPSPT001803C-030	H5TA09-0304	1810mm M304
2	MOLDED PVC 35P, COLOR SEE LIST	H1BC02-0304	M304
	TERMINAL WITH BRACKET: M97723A-3PB	A1QC84-0257	1 M257
1	MOLDED PVC 35P, COLOR SEE LIST	H1BC02-0304	M304
	BRACKET: YST-15P-NJ(YST-081)	A1QC87-0767W09	1 M767
	TERMINAL: 98673BBS-1(E)	AIRT08-0257	2 M257
	TERMINAL: ø4.75mm, 98475BS-1	A1QB06-0257	1 M257

APPROVED		<p>1-888-275-8755</p>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201-1000mm ±20mm 1001 ~1500mm ±25mm 1501-2100mm ±30mm 2100mm ↑ ±40mm
CHECKED	HU		
DESIGNER	XJW		
DRAWING	WEI		
DATE	01/AUG/24		
ITEM NO.	P7N3-RA45S-XX-WHT		UNIT:mm