


P1: M-003

P2: M-028A

Customer No.: NO:1 M709-02-XX

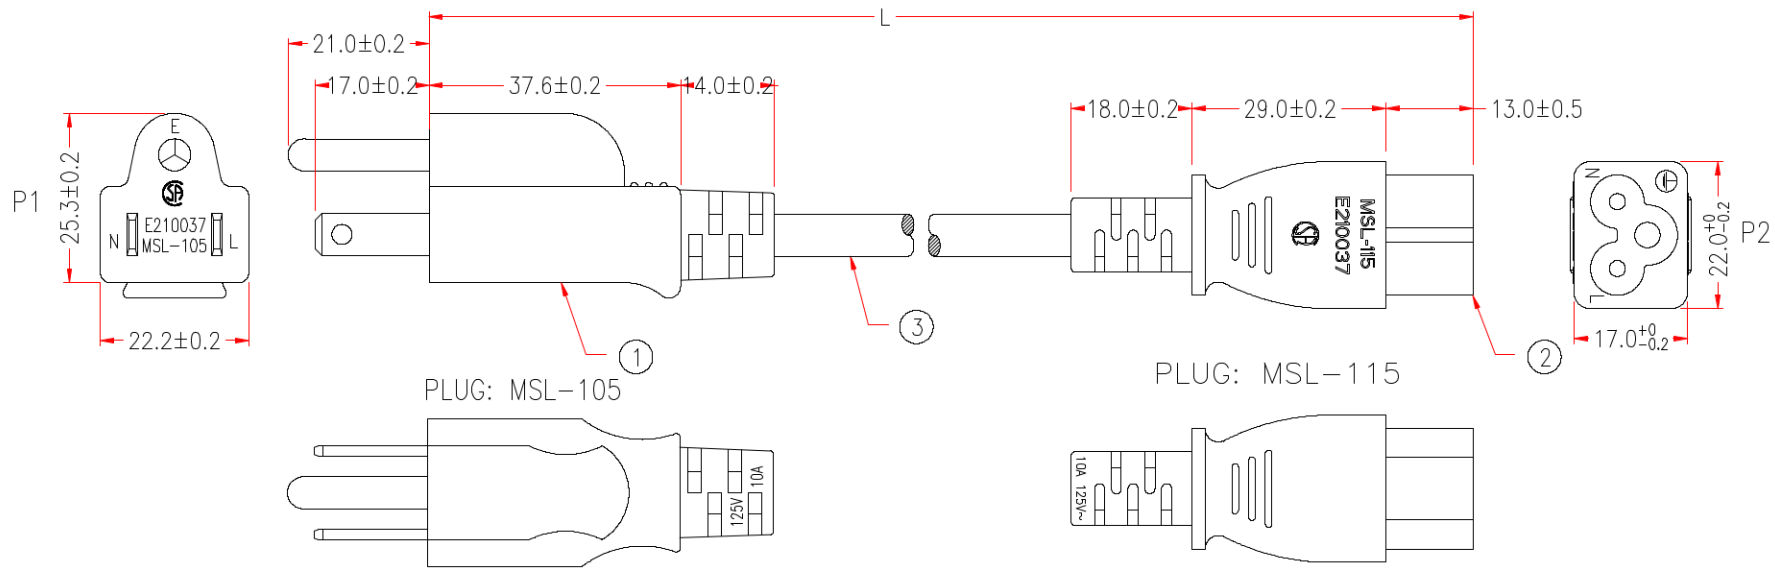

| P/N | L |
|---------------|-------|
| M709-02-01 | 1FT |
| M709-02-02 | 2FT |
| M709-02-2.5FT | 2.5FT |
| M709-02-03 | 3FT |

MARKING:

(UL) SVT 3/C 18AWG(0.824MM²) VW-1 75°C 300V E204978
 CSA SVT 3/C 0.824MM²(18AWG) FT2 60°C 300V 204790 MSL

| | P1 | P2 |
|-------|----|----|
| BLACK | L | L |
| WHITE | N | N |
| GREEN | E | E |

P1.P2: E210037

NOTE: All relevant materials are complied with RoHS directive .

| 3 | UL SVT 18AWG x 3C, OD 6.3mm, JACKET BLACK, DRAWING No.EPSVT011803C-008 | L-20mm | M304 |
|----------|--|-----------|--|
| 2 | MOLDED PVC 35P, COLOR BLACK | | M304 |
| | BRACKET: YS-008 | 1 | M767 |
| | TERMINAL: 98732PS-0 | 1 | M257 |
| 1 | TERMINAL: 98714PS-0 | 2 | M257 |
| | MOLDED PVC BLACK, 35P | | M304 |
| | BRACKET: YS-002 | 1 | M767 |
| 1 | TERMINAL: 98661BS-1 | 2 | M257 |
| | TERMINAL: Ø4.75mm 321203 | 1 | M769 |
| No. | DESCRIPTION | Q'TY | Supplier |
| APPROVED | | | Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1 |
| CHECKED | HU | 20/APR/10 | DRAWN NAME POWER SUPPLY CORDS & CORDS SETS |
| DRAWING | CHEN | 20/APR/10 | PRODUCT NO. P7N3-XX |

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm