
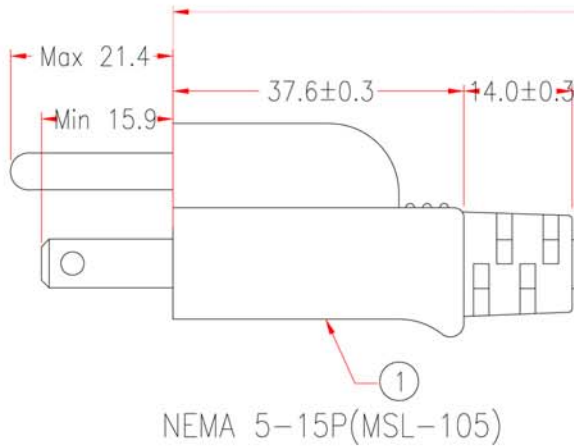



P1: M-003

P2: M-028A


Customer No.: No.: 2



NEMA 5-15P(MSL-105)

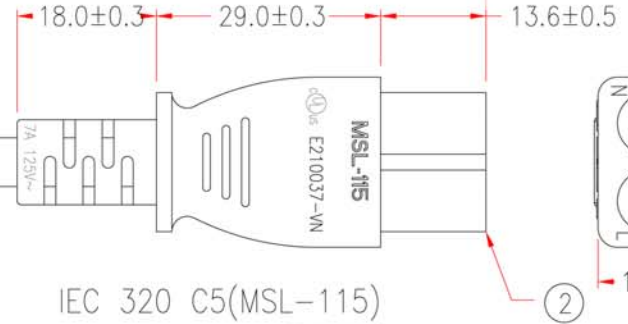

IEC 320 C5(MSL-115)




P2

PACKING A: <3M(10FT)



P1,P2: cULus E210037-VN



P/N	L	COLOR
P7N3-01-BLK	1F	Black
P7N3-01-WHT	1F	White(W49)
P7N3-015-BLK	1.5F	Black
P7N3-015-WHT	1.5F	White(W49)
P7N3-02-BLK	2F	Black
P7N3-02-WHT	2F	White(W49)
P7N3-025-BLK	2.5F	Black
P7N3-025-WHT	2.5F	White(W49)
P7N3-04-BLK	4F	Black
P7N3-04-WHT	4F	White(W49)

NOTE: All relevant materials are complied with RoHS directive .  
THE MARKING IS PROTRUDING LETTERING MOULD

No.	DESCRIPTION	Q'TY	Supplier
3	UL SVT 18AWG x 3C, OD 6.3mm, COLOR SEE LIST, DRAWING No.EPSVT011803C-099	H5TB10-0304	L-30mm M304
2	MOLDED PVC 35P, COLOR SEE LIST	H1BC02-0304	M304
	BRACKET: YS-008	A1QC17-0767	1 M767
	TERMINAL: 98733PS-0	A1QB22-0257	1 M257
	TERMINAL: 98714PS-0	A1QB05-0257	2 M257
1	MOLDED PVC COLOR SEE LIST, 35P	H1BC02-0304	M304
	BRACKET: YS-002	A1QC07-0767W09	1 M767
	TERMINAL: 98661BS-1	A1QB01-0257	2 M257
	TERMINAL: ø4.75mm 98475BS-1	A1QB06-0257	1 M257

MARKING:

(UL) SVT 3/C 18AWG(0.824MM<sup>2</sup>) VW-1 75°C 300V E204978  
C(UL) SVT 3/C 0.824MM<sup>2</sup>(18AWG) FT2 60°C 300V E204978 MSL-VN-

105115B1F18A(FP038-00)	
P1	P2
BLACK L	L
WHITE N	N
GREEN E	E

APPROVED		 <b>SFCable</b> 1-888-275-8755	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DESIGNER	XJW		
DRAWING	DAI		
DATE	01/AUG/24		
ITEM NO.	<b>P7N3-XX-WHT</b>		UNIT:mm 

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm