


P1: M-001

P2: M-052A

Customer No.:

No.:

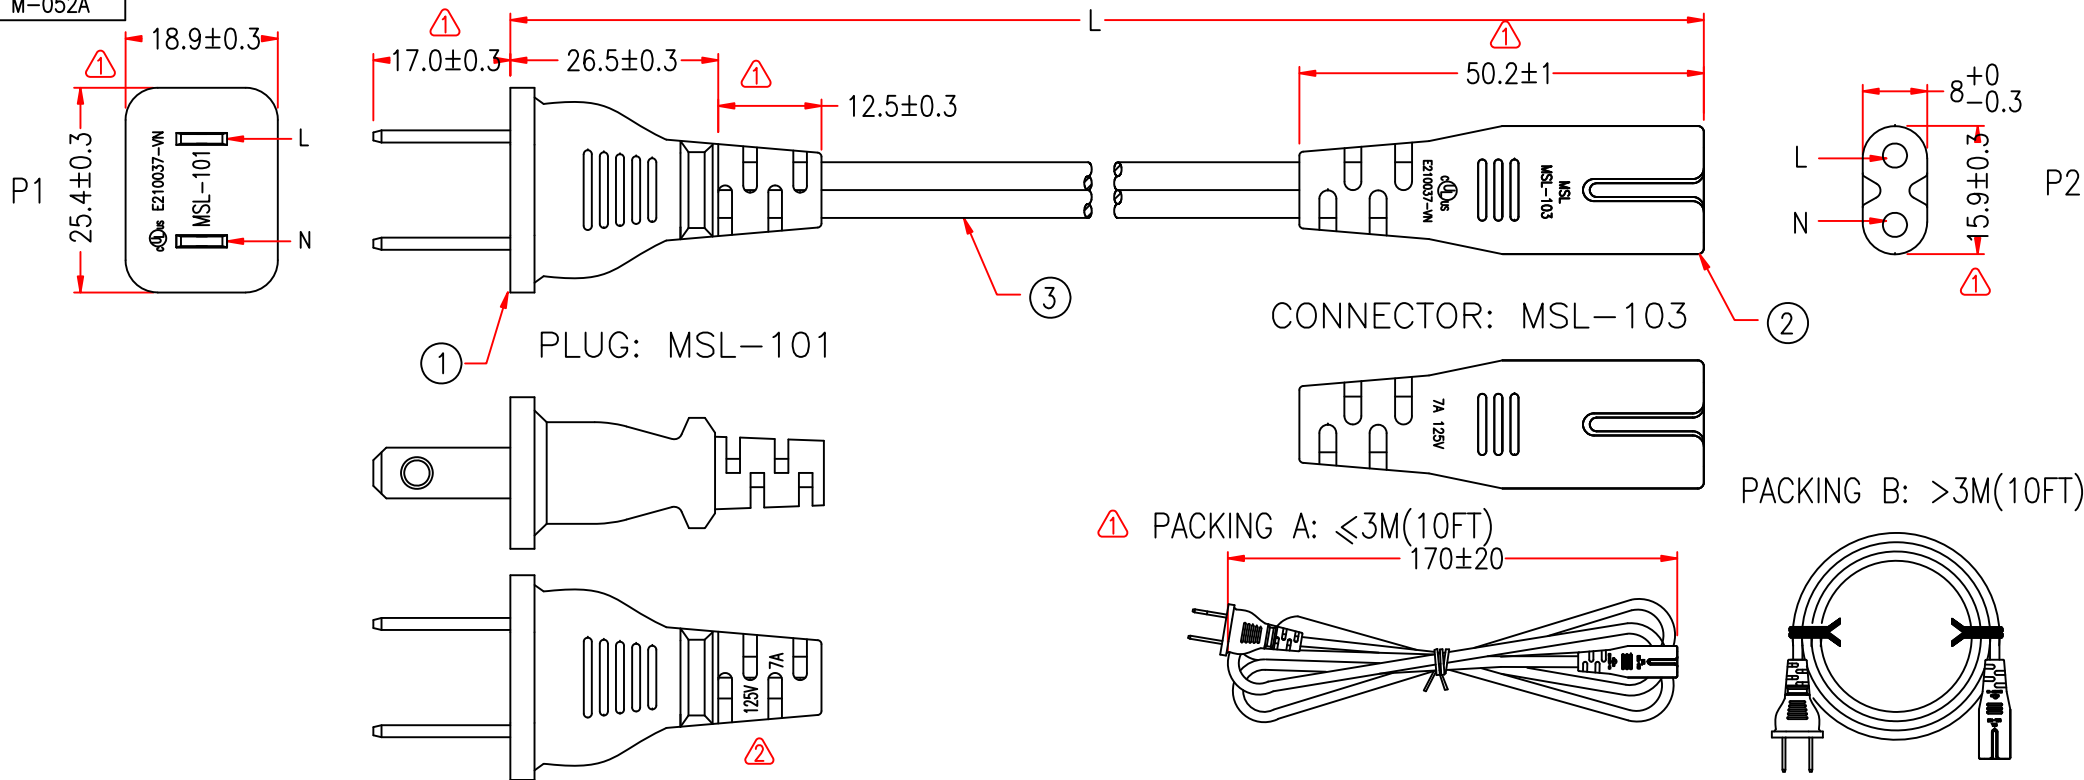


CABLE MARKING: ⚠

(UL) SPT-2 2/C 18AWG(0.824MM<sup>2</sup>) VW-1 105°C 300V E204978 C(UL)

SPT-2 2/C 0.824MM<sup>2</sup>(18AWG) FT2 105°C 300V E204978 MSL-VN-

⚠ P1,P2: c(UL)us E210037-VN

NOTE: All relevant materials are complied with RoHS directive .  
 THE CABLE MARKING IS CONCAVE LETTERING MOULD

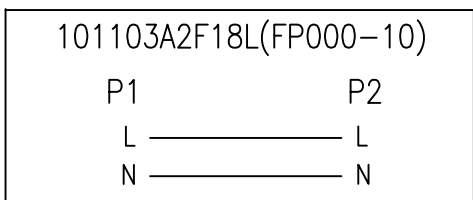

3	UL SPT-2 18AWG x 2C, OD 3.5*6.9mm, JACKET BLACK, DRAWING No. EPSPT001802C-050	H5TA04-0304K09	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	2.35 BRACKET: YS-031, COLOR BLACK	A1QC03-0767K09	1	M767
1	2.35 TERMINAL: 98714PS-0	A1QB05-0257	2	M257
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
1	BRACKET: YS-001	A1QC02-0767	1	M767
	TERMINAL: 98661BS-1	A1QB01-0257	2	M257
No.	DESCRIPTION	Q'TY	Supplier	

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm            ±10mm 201~1000mm        ±20mm 1001 ~1500mm       ±25mm 1501~2100mm       ±30mm 2100mm↑                ±40mm		
CHECKED	HU				
DESINGER	XJW				
DRAWING	DAI				
DATE	10/APR/24	ITEM NO.	P7NB-XX	UNIT:mm	

⚠ REV.2 2024.04.10 MODIFY CURRENT, ADD P/N

⚠ REV.1 2023.06.16 MODIFY PLUG LOGO&MODEL TOLERANCE&PACKING SIZE&CABLE

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm