
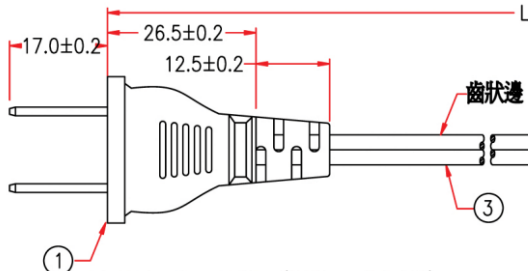




P1: M-001

P2: M-045A

Customer No.: No.:1



NEMA 1-15P (MSL-101P)





P1: E210037

P2: E210037




MARKING:

(UL) SPT-2 2/C 18AWG(0.824MM<sup>2</sup>) VW-1 105°C 300V E204978 CSA


SPT-2 2/C 0.824MM<sup>2</sup>(18AWG) FT2 105°C 300V 204790 MSL

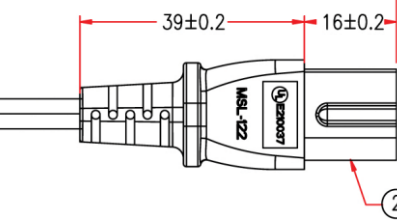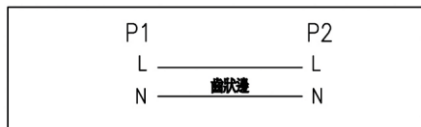

IEC320 C7 (MSL-122)

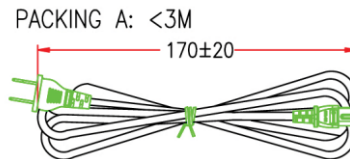

PACKING B: >3M



NOTE: All relevant materials are complied with RoHS directive .

3	UL SPT-2 18AWG x 2C, OD 3.5*6.9mm, JACKET BLACK, DRAWING No. EPSPT001802C-014	H5TA02-0304K09	L-20mm	M304
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
2	2.35 BRACKET: YS-031G		1	M767
	2.35 TERMINAL: 98714PS-0	A1QB05-0257	2	M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-001	A1QC02-0767	1	M767
	TERMINAL: 98662BS-1	A1QB03-0257	2	M257
No.	DESCRIPTION		Q'TY	Supplier

APPROVED					Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	18/JUL/14	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	JIANG	18/JUL/14	PRODUCT NO.	P7NP-XX	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

