


P1: M-001

P2: M-045A

Customer No.:



No.:1

P1



①

CONNECTOR: MSL-101P

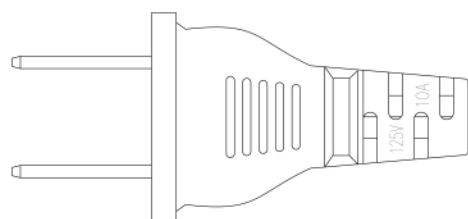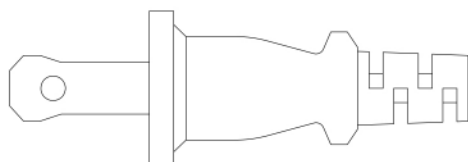

⚠ P1 P2: cULus E210037

MARKING:

(UL) SPT-2 2/C 18AWG(0.824MM²) VW-1 105°C 300V E204978 CSASPT-2 2/C 0.824MM²(18AWG) FT2 105°C 300V 204790 MSL

P1

L

N

P2

L


N

齒狀邊


齒狀邊

③

CONNECTOR: MSL-122

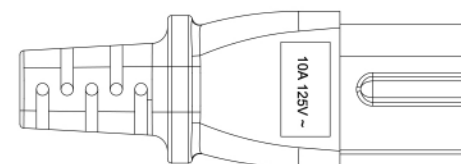

PACKING A: <3M

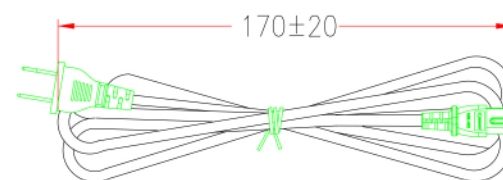


N

L

P2

PACKING B: >3M

NOTE: All relevant materials are complied with RoHS directive .
THE MARKING IS CONCAVE LETTERING MOULD

⚠

3	UL SPT-2 18AWG x 2C, OD 3.5*6.9mm, JACKET BLACK, DRAWING No. EPSPT001802C-050	H5TA04-0304K09	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	2.35 BRACKET: YS-031G	A1QC45-0767	1	M767
	2.35 TERMINAL: 98714PS-0	A1QB05-0257	2	M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-001	A1QC02-0767	1	M767
	TERMINAL: 98662BS-1	A1QB03-0257	2	M257
No.	DESCRIPTION		Q'TY	Supplier

APPROVED



Cable Length
Unless Other Spec.
Tolerances:

0 ~200mm	±10mm
201~1000mm	±20mm
1001 ~1500mm	±25mm
1501~2100mm	±30mm
2100mm↑	±40mm

CHECKED

HU

18/AUG/17

DRAWN NAME

POWER SUPPLY CORDS & CORDS SETS

DRAWING

XU

18/AUG/17

PRODUCT NO.

P7NP-XX

UNIT: mm

⚠ REV.4 2017.08.18

MODIFY CABLE MOLDED & MOLDED GOLO

⚠ REV.3 2016.05.26

MODIFY P2 MODEL LOGO

⚠ REV.1 2014.07.18

MODIFY P1 MODEL LOGO

⚠ REV.2 2015.09.02

MODIFY P1 MODEL LOGO

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm