


P1: M-004

P2: M-007

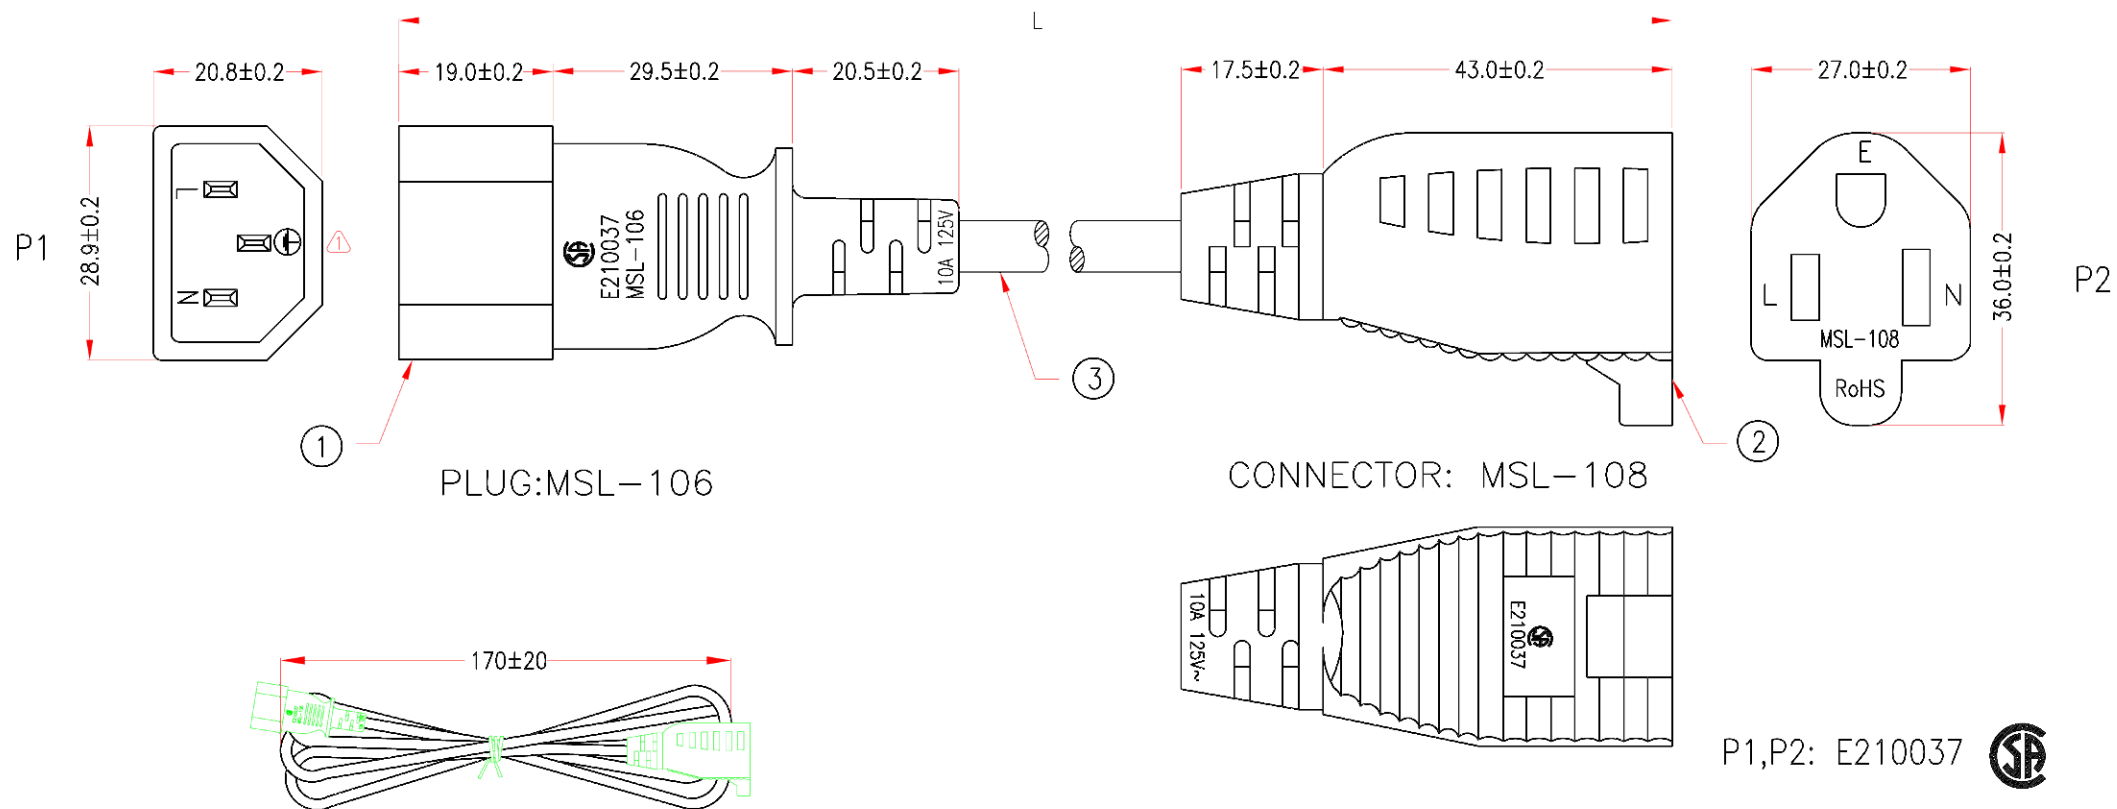

PLUG:MSL-106

CONNECTOR: MSL-108

P1,P2: E210037



MARKING:

(UL) SVT 3/C 18AWG(0.824MM<sup>2</sup>) VW-1 75°C 300V E204978 CSA SVT  
3/C 0.824MM<sup>2</sup>(18AWG) FT2 60°C 300V 204790 MSL

P1	P2
L	L BLACK
N	N WHITE
E	E GREEN

\*NOTE: ALL relevant materials are complied with RoHS directive

3	UL SVT 18AWG*3C OD 6.3mm, JACKET BLACK, DRAWING No. EPSVT011803C-008	L-40mm	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-023	1	M767
	TERMINAL: 98575BS-0	1	M257
1	TERMINAL: 98752BS-0	2	M257
	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-014	1	M767
No.	TERMINAL: 2*4mm 98672BS-1	3	M257
	DESCRIPTION	Q'TY	Supplier

APPROVED					Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	21/MAY/10			
DRAWING	JIANG	21/MAY/10	PRODUCT NO.	P7PA-XX	

△ REV.1 2010.05.21 MODIFY MSL-106 PLUG

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm