


P1: M-003

P2: M-007

Customer No.: No.1 10W1-042XX

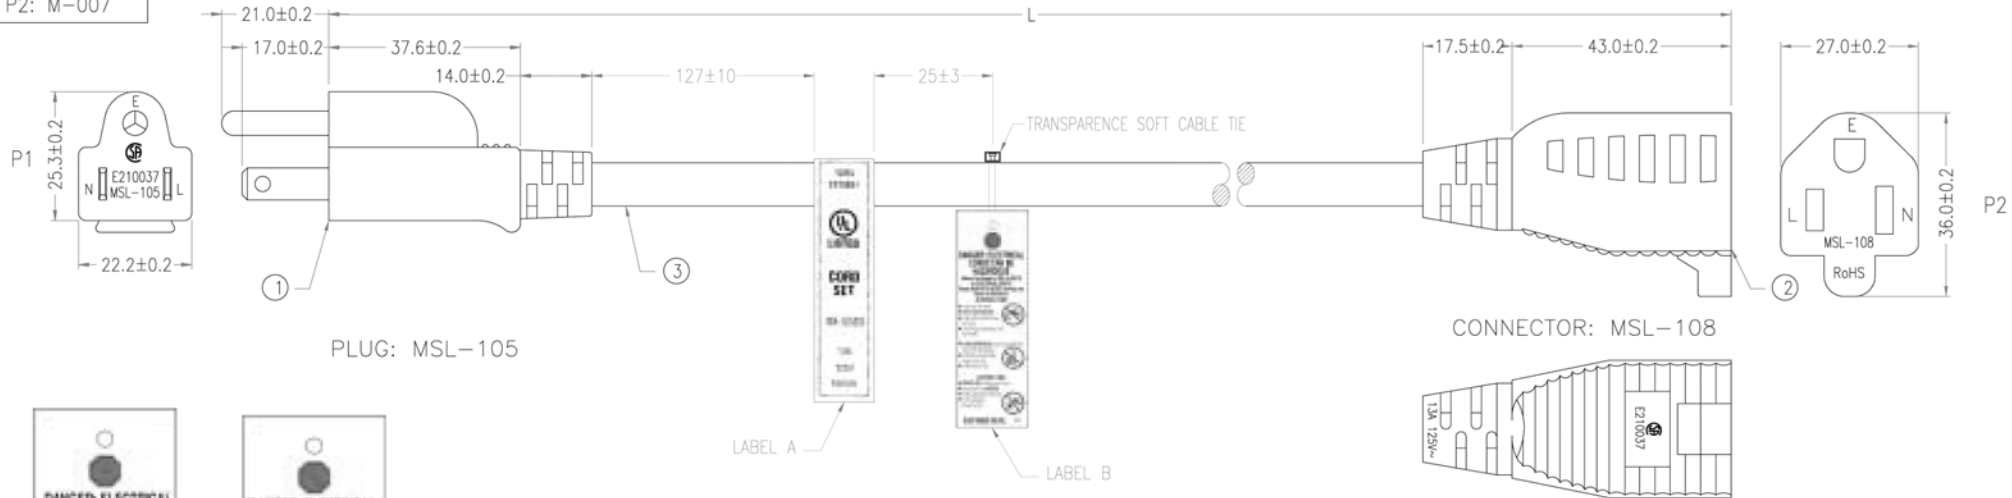

PLUG: MSL-105

CONNECTOR: MSL-108



LABEL B BACK

LABEL B FRONT

MARKING:

 SJT 3/C 16AWG(1.31MM²) VW-1 75°C 300V E204978 CSA SJT 3/C 1.31MM(16AWG) FT2 60°C 300V LL204790 MSL

P1	P2
L	L BLACK
N	N WHITE
E	E GREEN



LABEL A

NOTE: All relevant materials are complied with RoHS directive .
 LABEL B IS "WARNING LABEL"
 LABEL A IS "UL LABEL"

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No.EPSVT011603C-011	L	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-023	1	M767
	TERMINAL: 98575BS-0	1	M257
	TERMINAL: 98752BS-0	2	M257
1	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-002	1	M767
	TERMINAL: 98661BS-1	2	M257
	TERMINAL: Ø4.75mm SH403	1	M256

APPROVED			SFCABLE.COM 1-888-275-8755		Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	TIAN	11/SEP/07	DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	XIANG	11/SEP/07	PRODUCT NO.	P7PE-XX	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm