
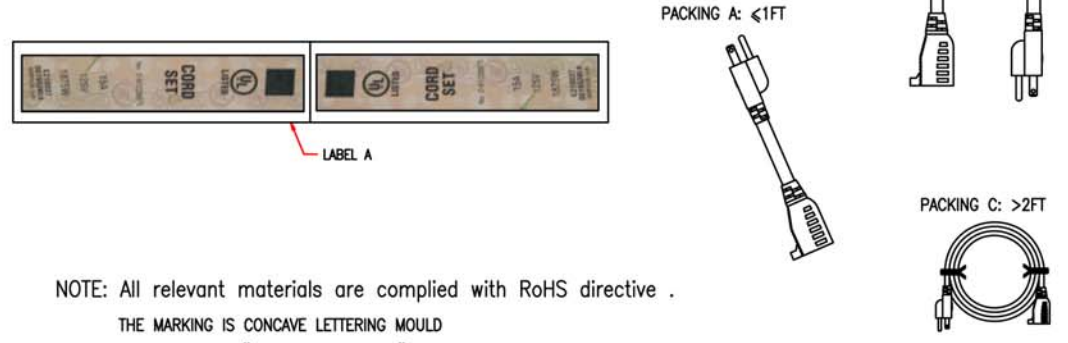
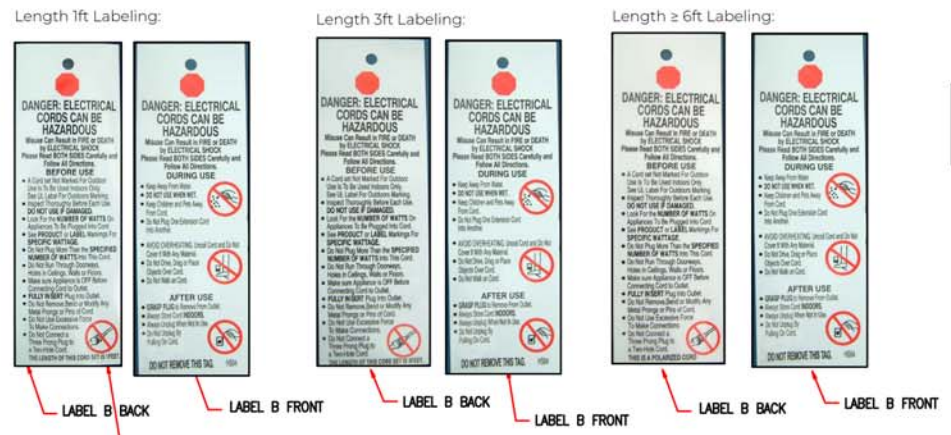



P1: M-Y084A
M-O84A
P2: M-007

Customer No.: No. 1

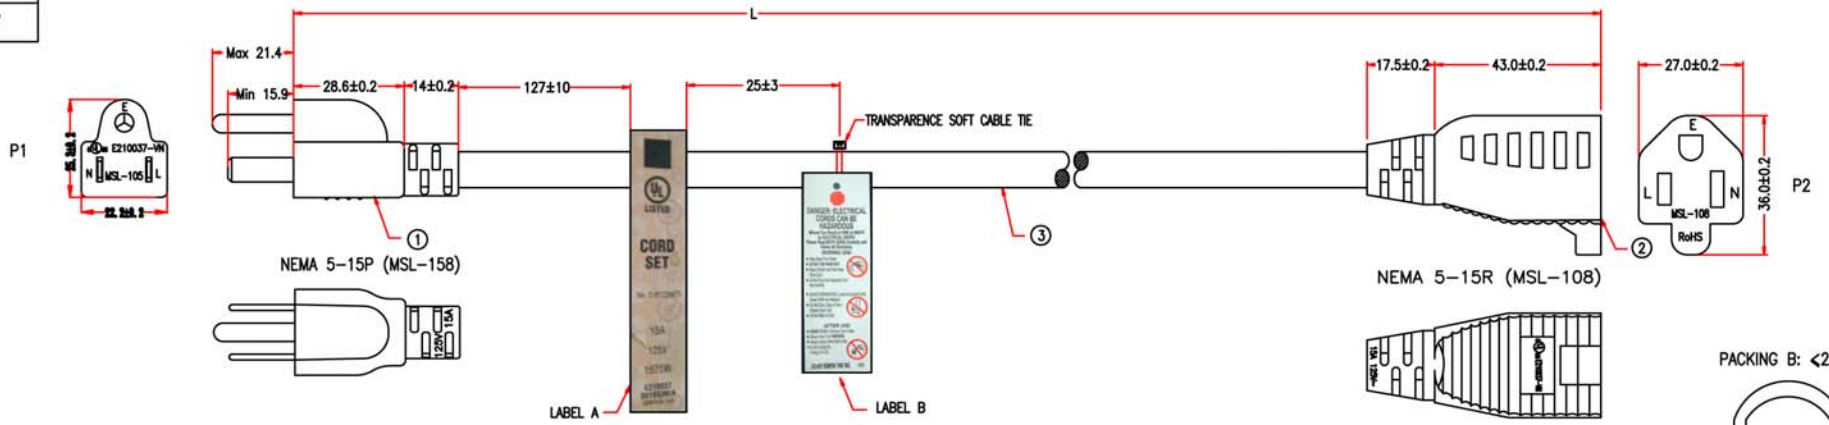

NOTE: All relevant materials are complied with RoHS directive .
THE MARKING IS CONCAVE LETTERING MOULD
LABEL B IS "WARNING LABEL"
LABEL A IS "UL LABEL"

MARKING: (UL) SJTW 3/C 14AWG(2.08MM²) VW-1 105°C 300V E204978 C(UL)
SJTW 3/C 2.08MM²(14AWG) FT2 105°C 300V E204978 MSL

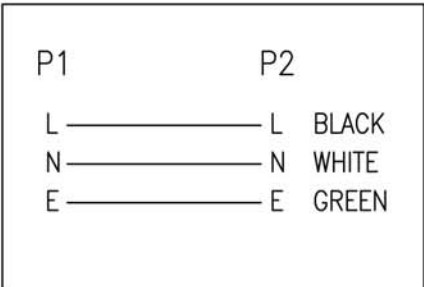

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJTW 14AWG*3C OD 9.3mm, JACKET BLACK, DRAWING No.EPSJTW011403C-160	Xmm	M304
2	MOLDED PVC 45P, COLOR BLACK		M304
	BRACKET: YS-016	1	M767
	TERMINAL: 98575BS-0	1	M257
	TERMINAL: 98752LBS-0	2	M257
1	MOLDED PVC 35P, COLOR BLACK		M304
	TERMINAL WITH BRACKET: M87629LA-3PB	1	M257

APPROVED	CHECKED	DESIGNER	DRAWING	DATE	ITEM NO.	DESCRIPTION	UNIT:mm	Supplier
	HU	XJW	ZHU	09/NOV/21		P7PX-50 / P7PX-25		SFCable

Cable Length	Tolerances:	Supplier
0 ~200mm	±10mm	
201~1000mm	±20mm	
1001 ~1500mm	±25mm	
1501~2100mm	±30mm	
2100mm↑	±40mm	