

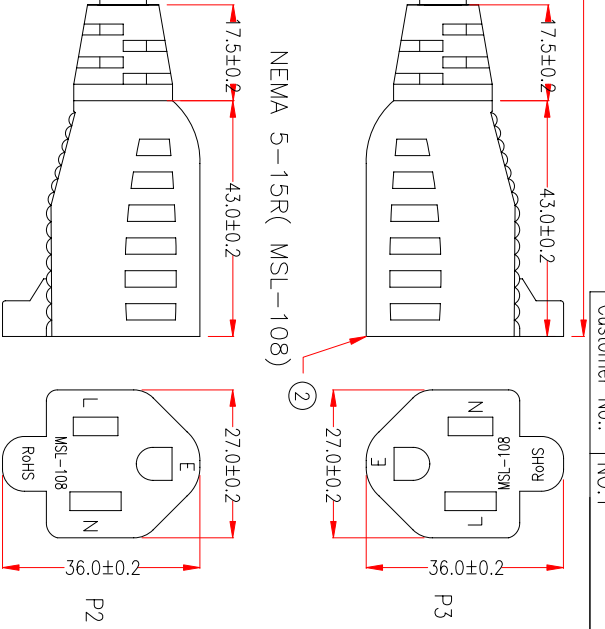
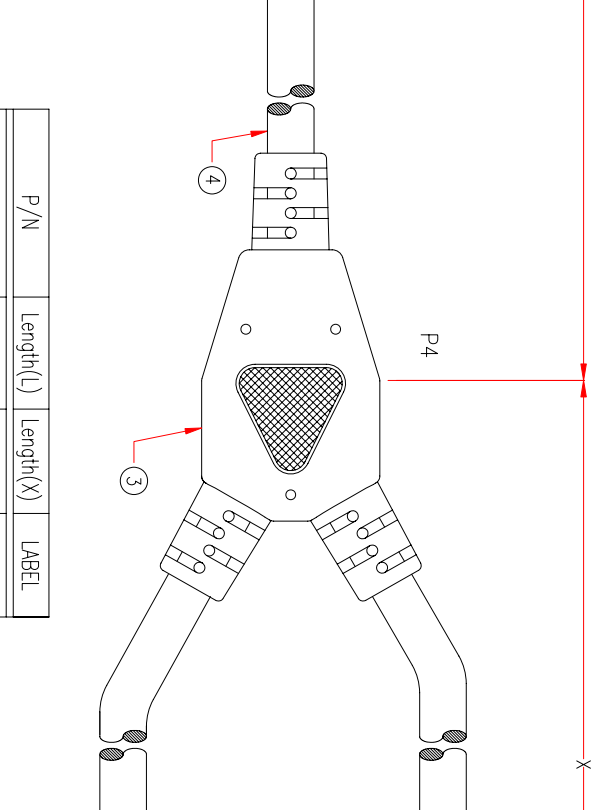
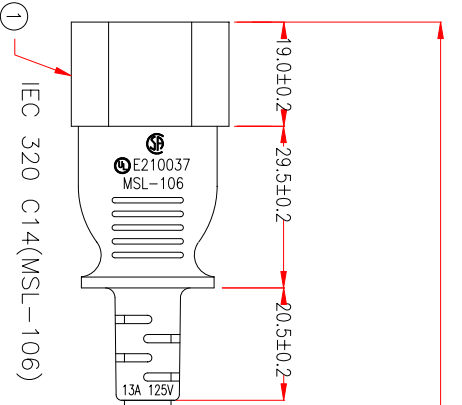


P1: M-004
 P2,P3: M-007
 P4: M-008


Customer No.: NO.1




P/N	Length(L)	Length(X)	LABEL
M719-83-16-01	152mm	152mm	LABEL A
M719-83-16-03	735mm	180mm	LABEL B



PACKING A: 1FT



PACKING B: 3FT

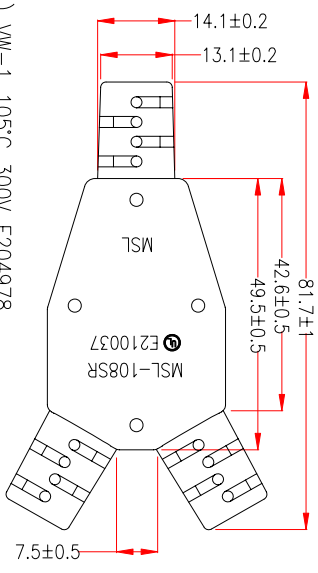

MARKING:

(UL) SJT 3/C 16AWG(1.31MM²) VW-1 105°C 300V E204978
 CSA SJT 3/C 1.31MM²(16AWG) FT2 105°C 300V 204790 MSL

	P1	P2	P3
BLACK	L	L	L
WHITE	N	N	N
GREEN	E	E	E

*NOTE: ALL relevant materials are complied with RoHS directive.

P1,P2,P3: E210037

P4: E210037

No.	DESCRIPTION	QTY	Supplier
1	MOLDED PVC 35P, COLOR BLACK BRACKET: YS-014 TERMINAL: 2x4mm 98672BS-1	1	M767
2	MOLDED PVC 45P, COLOR BLACK BRACKET: YS-016 TERMINAL: 98752BS-0	2	M257
3	MOLDED PVC 45P, COLOR BLACK BRACKET: YS-021 TERMINAL: 96146BS-0	3	M257
4	UL SJT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No. EPSV011603C-077	1	M304

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm



APPROVED
 CHECKED
 DRAWING

HU
 XIAO
 04/AUG/16
 PRODUCT NO.
 P7QQ-C16-XX
 POWER SUPPLY CORDS & CORDS SETS
 P7QQ-C16-XX
 UNIT: mm

Unless Otherwise SPEC. Tolerances:
 0.5
 ±0.5
 ±0.3
 ±0.1