

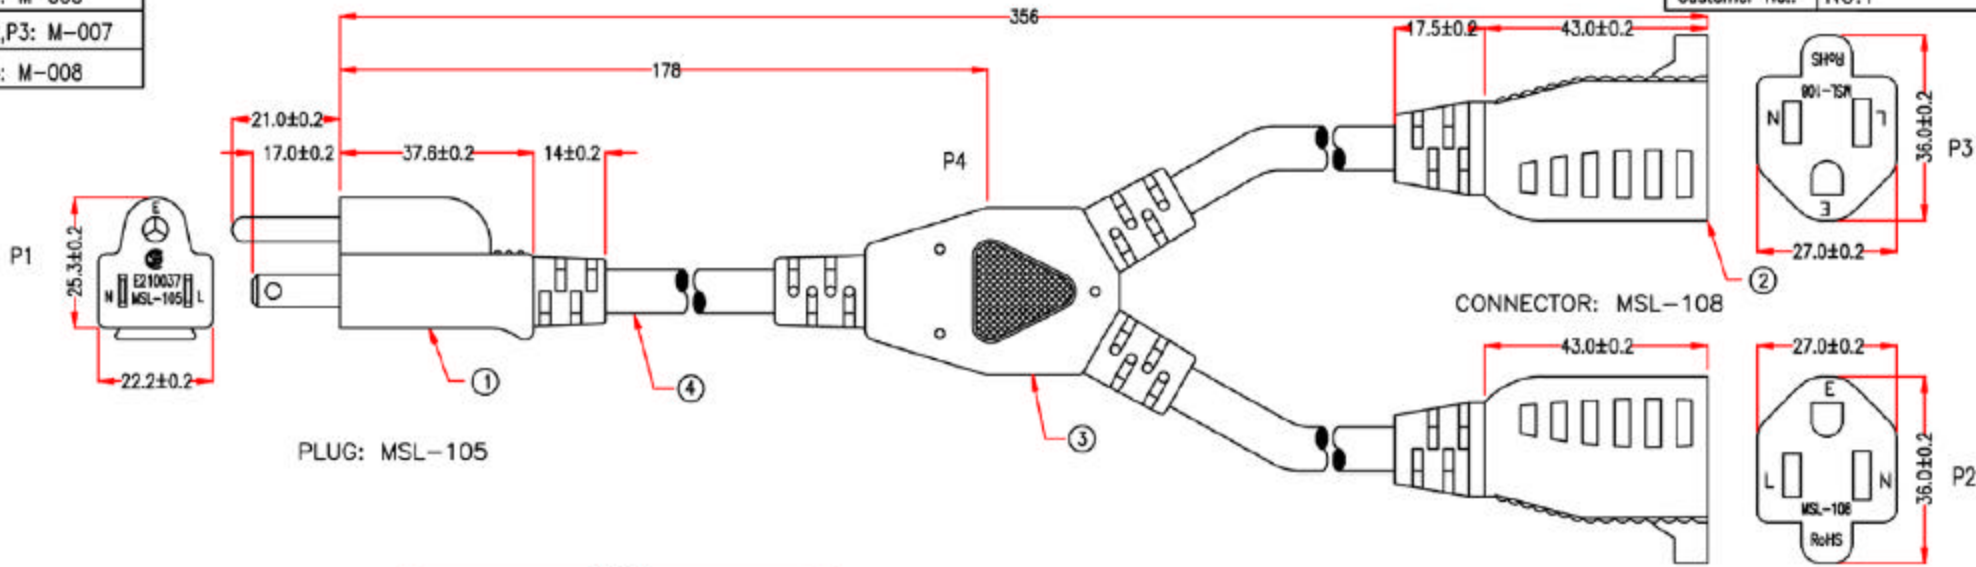


Customer No.: NO.1

P1: M-003
P2,P3: M-007
P4: M-008

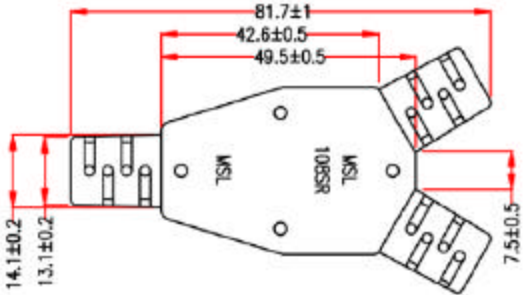

PACKING:



P1,P2,P3: E210037

*NOTE: ALL relevant materials are complied with RoHS directive.

MARKING:

(UL) SJT 3/C 16AWG(1.31MM²) VW-1 75°C 300V E204978
CSA SJT 3/C 1.31MM²(16AWG) FT2 60°C 300V 204790 MSL

	P1	P2	P3
BLACK	L	L	L
WHITE	N	N	N
GREEN	E	E	E

4	UL SJT 16AWG*3C OD 8.5mm, JACKET BLACK, DRAWING No.EPSVT011603C-011	178mm*3	M304
	MOLDED PVC 35P, COLOR BLACK		M304
3	BRACKET: YS-021	1	M767
	TERMINAL: 96146BS-0	3	M257
	MOLDED PVC 45P, COLOR BLACK		M304
2	BRACKET: YS-016	2	M767
	TERMINAL: 98575BS-0	2	M257
	TERMINAL: 98752BS-0	4	M257
	MOLDED PVC 35P, COLOR BLACK		M304
1	BRACKET: YS-002	1	M767
	TERMINAL: 98661BS-1	2	M257
	TERMINAL: 4.75mm, 321203	1	M769

No.	DESCRIPTION		Q'TY	Supplier
APPROVED		SFCable.com 1-888-275-8755		Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	24/JUN/10 DRAWN NAME	POWER SUPPLY CORDS & CORDS SETS	
DRAWING	JIANG	24/JUN/10 PRODUCT NO.	P7YY-01	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm

UNIT: mm