


P1: M-179
P2: M-904

RE.1 2001.11.06

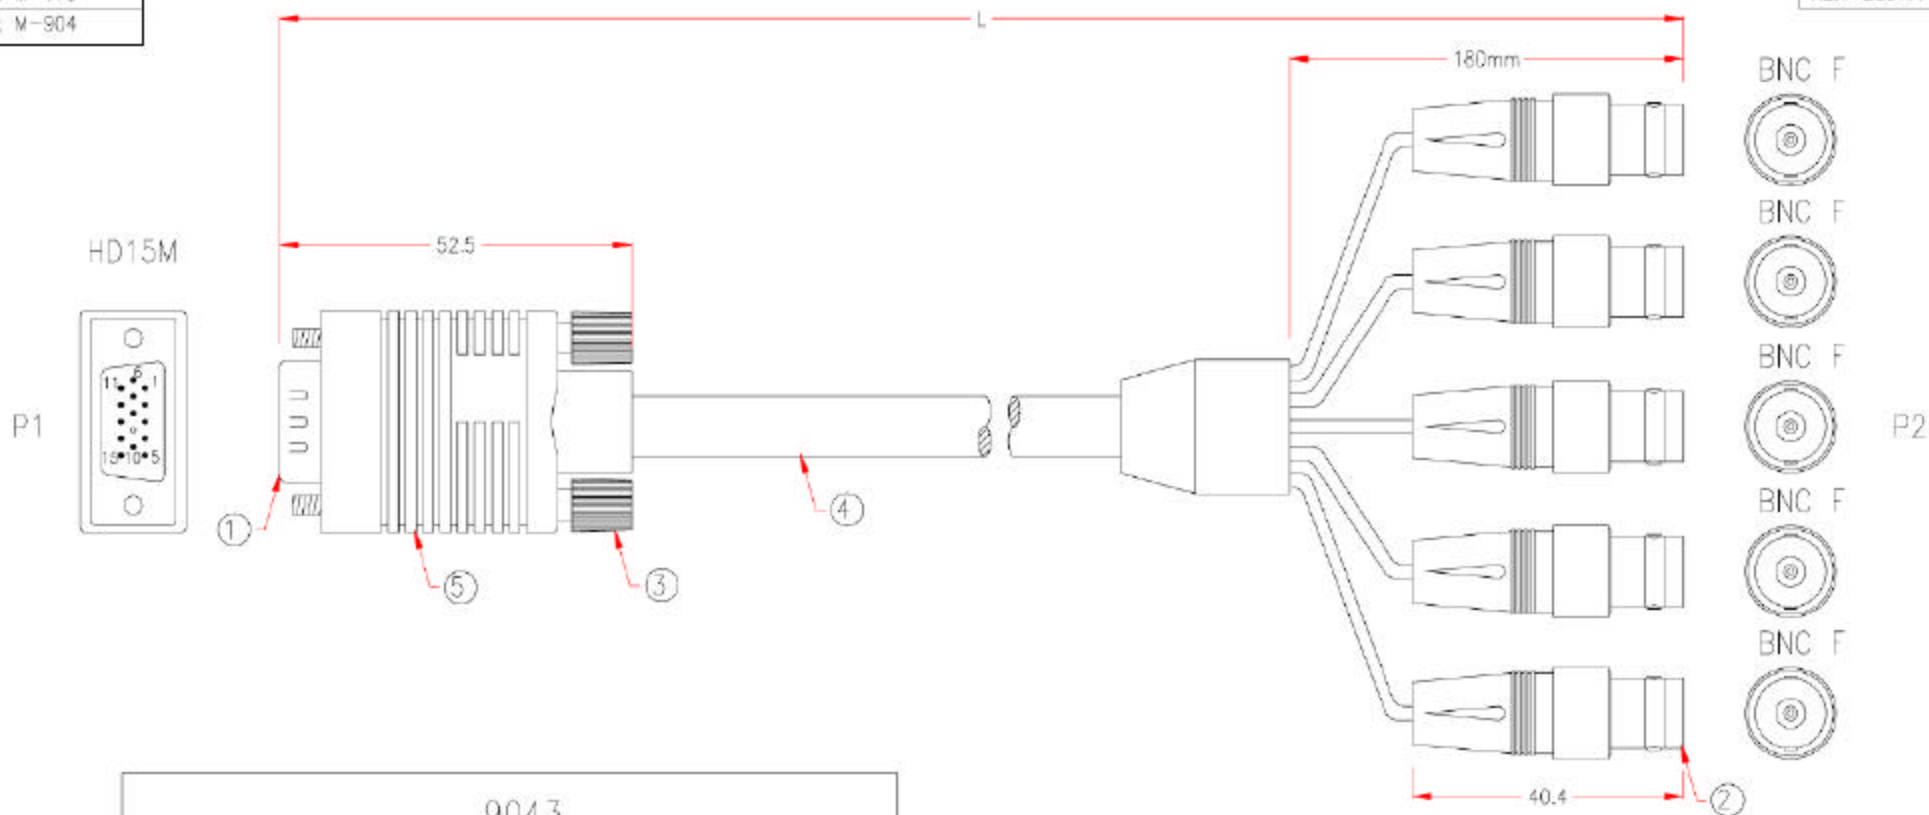

9043		HD15M	BNCF*5
RED CONDUCTOR	1	CONDUCTOR	CONDUCTOR
RED SHIELD	6	SHIELD	SHIELD
GREEN CONDUCTOR	2	CONDUCTOR	CONDUCTOR
GREEN SHIELD	7	SHIELD	SHIELD
BLUE CONDUCTOR	3	CONDUCTOR	CONDUCTOR
BLUE SHIELD	8	SHIELD	SHIELD
GREY CONDUCTOR	13	CONDUCTOR	CONDUCTOR
GREY SHIELD	11	SHIELD	SHIELD
BLACK CONDUCTOR	14	CONDUCTOR	CONDUCTOR
BLACK SHIELD	10	SHIELD	SHIELD
	4	SHIELD	

No.	DESCRIPTION	Q'TY	Supplier
L	LENGTH		
5	MOLDED PVC BEIGE		M304
4	UL2919 5 MINI COAXIAL 24AWG, ALUM-MYLAR AND COPPER BRAID FOIL SHIELDING WITH DRAIN WIRE, OD 9.0, JACKET BEIGE		M2
3	MOLDED THUMBSCREW #4-40, BEIGE	2	M95
2	BNC FEMALE CONNECTOR	5	M440
1	HD15 MALE WITHOUT PIN 9, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M1

APPROVED		SFCABLE.COM	Cable Length Tolerances: 0 ~0.2M ±0.01M 0.21~1.0M ±0.02M 1.1 ~1.5M ±0.025M 1.51~2.1M ±0.03M 2.1M ↑ ±0.04M
CHECKED	譚小瓊		
DRAWING	鄭康華		
ITEM NO.	RB20-01		