



P1:	M-Y125B
	M-125E
P2:	M-Y904A
	M-904A
P3:	M-487A
P4:	M-325A

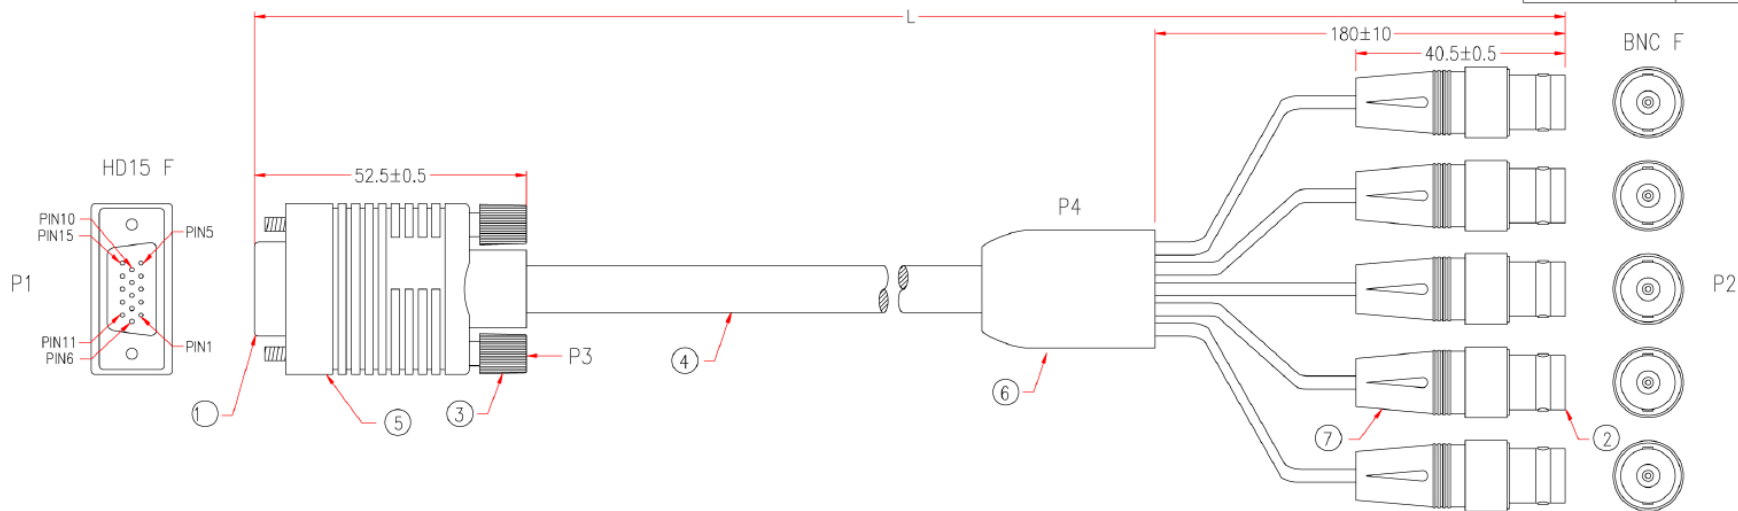

NOTE: All relevant materials are complied with RoHS directive .

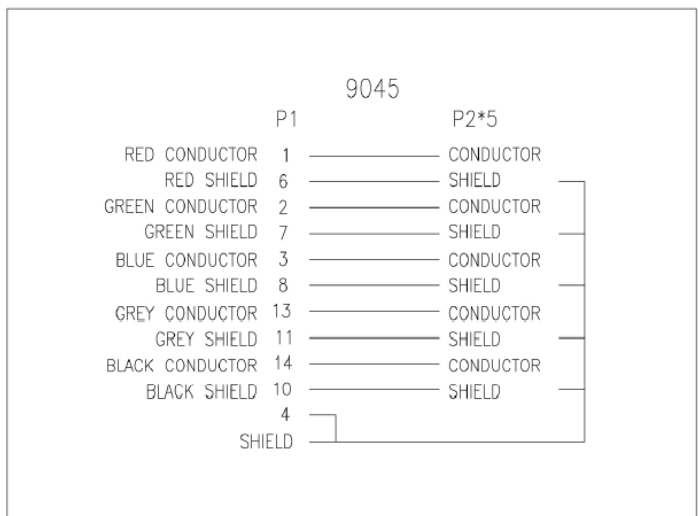

7	BLACK HEAT SHRINK TUBE $\phi 1.5 \times 10 \text{mm}$	5	M743
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
6	MOLDED PVC BEIGE		M304
5	UL1061 26AWG INSULATOR WIRE, LENGTH 28mm, DRAWING No. EH002601C-013	1	M304
	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 10 \text{mm}$	5	M743
	BLACK HEAT SHRINK TUBE $\phi 1.5 \times 10 \text{mm}$	5	M743
	COPPER FOIL 33*65mm	1	M583
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
4	UL2919 5 MINI COAXIAL CABLE 28AWG, ALUM-MYLAR FOIL AND COPPER BRAID SHIELDING WITH DRAIN WIRE, OD 9.0mm, JACKET BEIGE, DRAWING No. EAAB2805T-006	L-20mm	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 48mm, BEIGE	2	M95
2	BNC FEMALE CONNECTOR, GOLD FLASH ON CONTACTS, WHITE INSULATOR(75ohm)	5	M440
1	HD15 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
No.	DESCRIPTION	Q'TY	Supplier

APPROVED		<b>SFCABLE.COM</b>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10 \text{mm}$ 201~1000mm $\pm 20 \text{mm}$ 1001 ~1500mm $\pm 25 \text{mm}$ 1501~2100mm $\pm 30 \text{mm}$ 2100mm $\uparrow$ $\pm 40 \text{mm}$
CHECKED	HU		
DRAWING	NIE		

CHECKED

DATE	07/OCT/09	ITEM NO.	RB30-01	UNIT:mm	
------	-----------	----------	---------	---------	--