
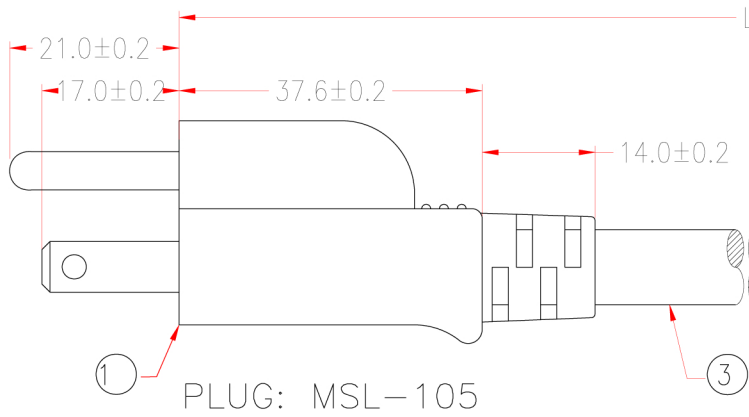


P1: M-003


P2: M-044

Customer No.: No.:1 M711-47-8FT

P1





PLUG: MSL-105

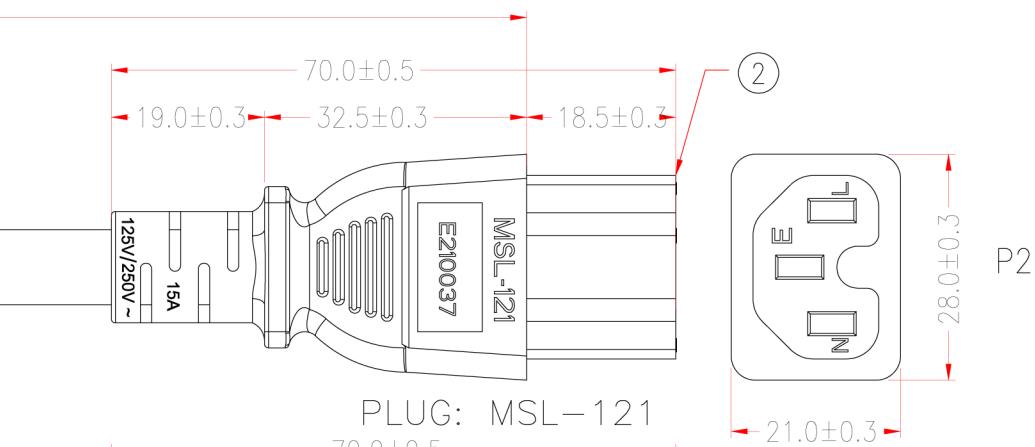

P2

PLUG: MSL-121

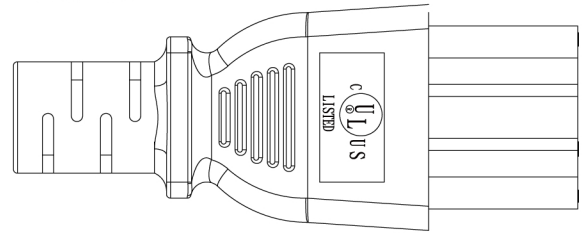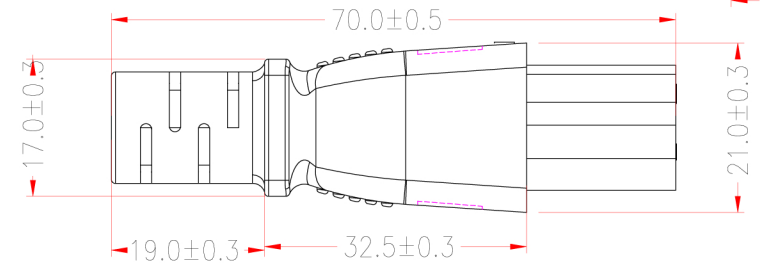

MARKING: (UL) SJT 3/C 14AWG(2.08MM²) VW-1 105°C 300V E204978
 CSA SJT 3/C 2.08MM²(14AWG) FT2 105°C 300V 204790 MSL



P1: E210037



PACKING A: <3M

PACKING B: >3M

P2: E210037



*NOTE: All relevant materials are complied with RoHS directive .

P1	P2	
L	L	BLACK
N	N	WHITE
E	E	GREEN

3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No. EPSVT011403C-085	H5TC13-0304K09	Lmm	M304	
	MOLDED PVC 35P, JACKET BLACK	H1BC02-0304K09		M304	
2	BRACKET:9745C		1	M257	
	TERMINAL:98745		3	M257	
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304	
	BRACKET: YS-002	A1QC07-0767	1	M767	
	TERMINAL: 98661BS-1	A1QB01-0257	2	M257	
	TERMINAL: Ø4.75mm 98475BS-1	A1QB06-0257	1	M257	
No.	DESCRIPTION			Q'TY	Supplier

APPROVED					Unless Otherwise SPEC. Tolerances: 0. ±0.5 .0 ±0.3 .00 ±0.1
CHECKED	HU	09/MAY/13			
DRAWING	VinKing	09/MAY/13	PRODUCT NO.	SF-1220-06B	UNIT: inches

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm