


MARKING: YP-61A YUNG-LI $\frac{10}{250} \sim$ BS1363/A (2010) APPR. BY ASTA LIC 1359 L00244A SAFETY MARK 180890-12 (for main plug) SS 145/A SASO 2203 MS 589/A 0012

REV	DATE	DRAWN	Description
C	2019.01.23	SUKI	YP-61 changed YP-61A.
D	2021.03.29	SUKI	Add UKCA of receptacle.

UK CA CE 10 DVE NSW22012

(6') 1830±50

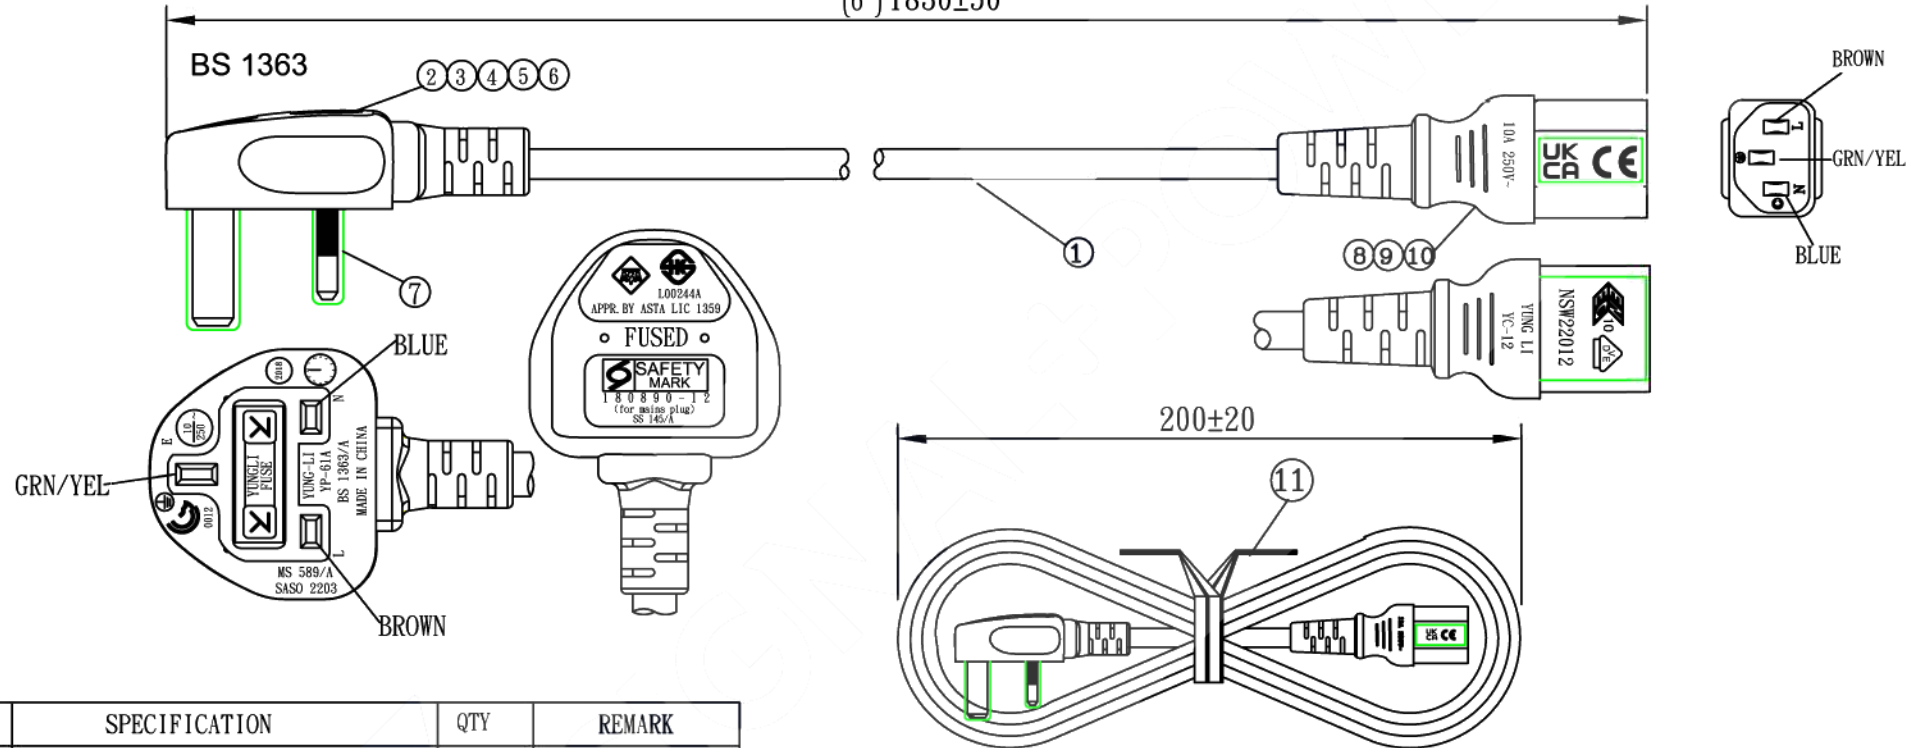

NO.	SPECIFICATION	QTY	REMARK
1	H05VV-F 3G 1.0mm ² BLACK	1PC	
2	YP-61A PVC PLASTIC:60P BLACK	54g/PC	
3	FRAME: BLACK	1PC	
4	FUSE LID: BLACK	1PC	
5	FRAME LID	1PC	
6	FUSE:10A	1PC	
7	SLEEVE WHITE	1PC	
8	YC-12 INNER BODY	1PC	
9	TER:97740BS-0	3PCS	
10	YC-12 PVC PLASTIC:50P BLACK	18g/PC	
11	MINI TIE:L=130mm BLACK	1PC	

TOLERANCE >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	APPROVED		DATE					
	CHECKED		DATE					
	DRAWN	SUKI	DATE	21.03.29	CUSTOMER			
	TYPE	YP-61A/YC-12			P/N	SF-6112-06B		
	DRAWING NO.	CY-B0690		REV	D	MATERIAL	P. V. C	UNIT
					SCALE			