


MARKING: YP-61A YUNG-LI  $\frac{13}{250}$  BS1363/A   APPR. BY ASTA LIC 1359   SASO 2203 MS 589/A 


| REV | DATE       | DRAWN | Description             |
|-----|------------|-------|-------------------------|
| C   | 2019.01.23 | SUKI  | YP-61 changed YP-61A.   |
| D   | 2021.03.29 | SUKI  | Add UKCA of receptacle. |



(10') 3050±50

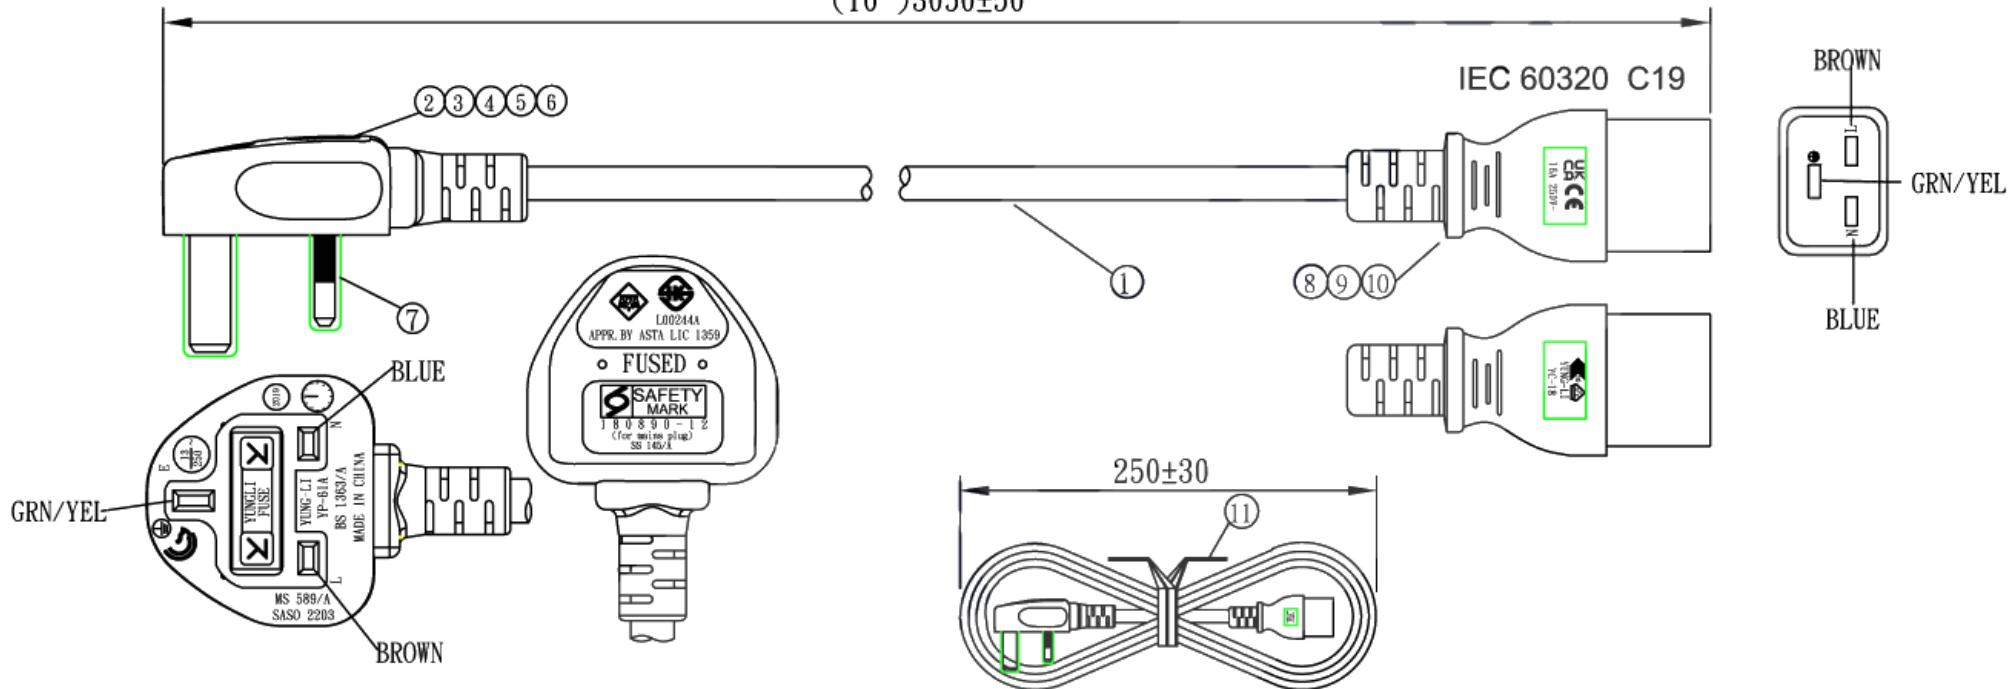

| NO. | SPECIFICATION                | QTY    | REMARK |
|-----|------------------------------|--------|--------|
| 1   | H05VV-F 3G 1.5mm BLACK       | 1PC    |        |
| 2   | YP-61A PVC PLASTIC:60P BLACK | 45g/PC |        |
| 3   | FRAME: BLACK                 | 1PC    |        |
| 4   | FUSE LID: BLACK              | 1PC    |        |
| 5   | FRAME LID                    | 1PC    |        |
| 6   | FUSE:13A                     | 1PC    |        |
| 7   | SLEEVE WHITE                 | 1PC    |        |
| 8   | YC-18 PVC PLASTIC:50P BLACK  | 25g/PC |        |
| 9   | YC-18 INNER BODY             | 1PC    |        |
| 10  | YC-18 TER                    | 3PCS   |        |
| 11  | MINI ITE:L=210mm BLACK       | 1PC    |        |

|   |             |              |      |          |   |             |         |      |
|---|-------------|--------------|------|----------|---|-------------|---------|------|
| Tolerance<br>>0±0.30<br>>1.0±0.50<br>>10.0±1.0<br>>20.0±2.0<br>Angle: ±1° | Approved    |              | Date |          |  |             |         |      |
|   | Checked     |              | Date |          |   |             |         |      |
|   | Drawn       | SUKI         | Date | 21.03.29 | Customer  |             |         |      |
|   | Cat. No.    | YP-61A/YC-18 |      |          | P/N.  | SF-6118-10B |         |      |
|   | Drawing No. | CY-B0693     |      | Rev.     | D   | Material    | P. V. C | Unit |

 **SF Cable**

Customer: SF-6118-10B  
P/N: SF-6118-10B

Material: P. V. C  
Unit: mm  
HEFT(g)