


16-2 Unshielded Plenum

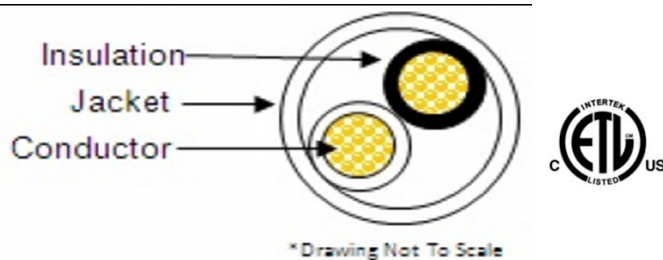

Applications

This document establishes the specifications for a plenum rated one pair unshielded cable used for communication applications.

Technical Details

Temperature Rating
Operation: -2°C to +60°C
Nominal Weight: 25 lbs. / 1,000 ft.

Construction Details

Number of Conductors: 2/C
Conductor: 16AWG Stranded Bare Copper
Insulation Material: Remguard Plenum Polymer
Nominal Insulation Thickness: 0.007 in.
Nominal Insulation Diameter: 0.072 in.
Color Code: Black, Natrual
Jacket Material: Remguard Plenum Polymer
Nominal Jacket Thickness: 0.015 in.
Nominal Diameter: 0.175 in.
Surface Print: 3122598 CMP 16AWG C(ETL)US
FT6 + Sequential Footage Marking

Standards

NEC Article 800
CMP Rating FT6

Codes & Listings

C(ETL)US CMP

Electricals

Suggested Working Voltage: 300 Volts, rms.