


## DIRECT BURIAL AUDIO CABLE

### 16 AWG / 4 Conductor

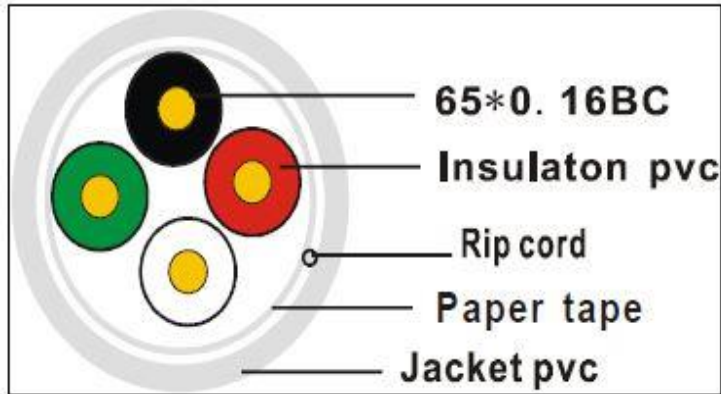

#### Description

16/4 Stranded CMR/CL3R Direct Burial Sound Audio Cable

#### Applicable Standards

- For Communication and Signal Control Systems
- 4 Oxygen Free Bare Copper Conductors in an Overall Jacket

#### Physical Characteristics

Conductor		Oxygen Free B.C.
Number of Conductors		4
AWG		16
Stranding		65
Diameter	(inches)	0.0063
<b>Insulation</b>		<b>PVC</b>
Diameter	(inches)	0.0827
Nominal Wall	(inches)	0.0098
<b>Jacket</b>		<b>FR-PVC</b>
Overall Diameter	(inches)	0.2559
Nominal Thickness	(inches)	0.02165
<b>Paper Tape</b>		<b>Yes</b>
<b>Rip Cord</b>		<b>Yes</b>
Conductor Resistance	(ohms / 1000m)	15.8
Voltage	(volts)	300
Nominal Weight	(pounds)	28

#### Colors

Insulation Colors Red / Black / White / Green

#### Part Numbers

Part Number	Color	Put-up
	Black	500' Reelex II

#### Cable Marking

AUDIO CABLE 4 COND 16 AWG HI-STRAND OXYGEN FREE COPPER  
 CMR/CL3R DIRECT BURIAL AUDIO CABLE SUN RES XXXXXX C(ETL)US  
 \*\*\*FT