


## 16-4 Unshielded Plenum

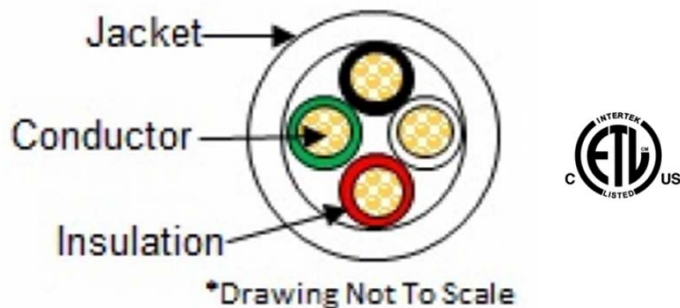

### Applications

This document establishes the specifications for a plenum rated four conductor unshielded cable used for remote control and signaling power limited circuit applications.

### Technical Details

Temperature Rating  
Operation: -2°C to +60°C  
Nominal Weight: 44 lbs. / 1,000 ft.

### Construction Details

Number of Conductors: 4/C  
Conductor: 16AWG Stranded Bare Copper  
Insulation Material: Remguard Plenum Polymer  
Nominal Insulation Thickness: 0.007 in.  
Nominal Insulation Diameter: 0.072 in.  
Color Code: Black, Natural, Red, Green  
Jacket Material: Remguard Plenum Polymer  
Nominal Jacket Thickness: 0.015 in.  
Nominal Diameter: 0.205 in.  
Surface Print: 3122598 CMP 16AWG C(ETL)US  
FT6 + Sequential Footage Marking

### Standards

NEC Article 800  
CMP Rating FT6

### Codes & Listings

C(ETL)US FT6

### Electricals

Suggested Working Voltage: 300 Volts, rms.