


Product Name	3.5 mm male to male cable
Product Numbers	SF-AVC18

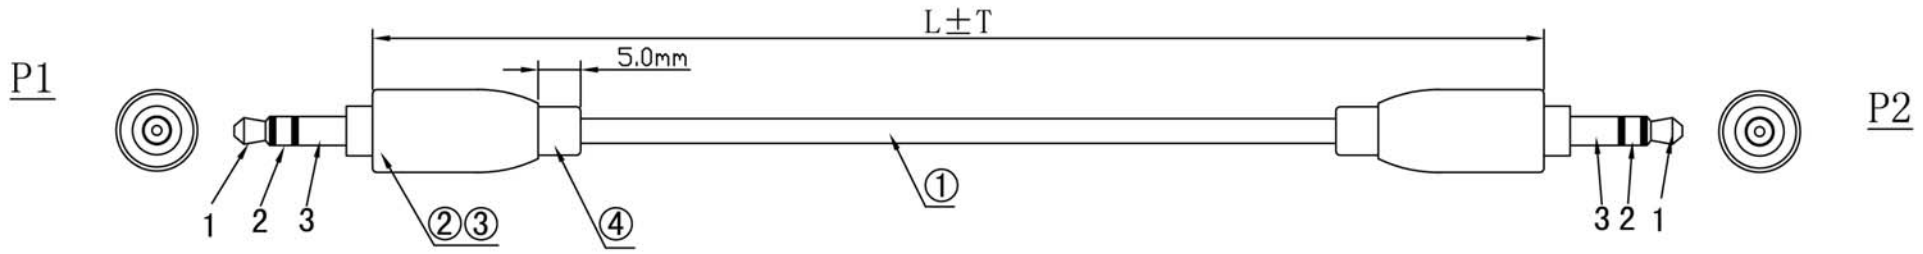

Electronic Test:

1. 100% TEST OPEN SHORT MIS-WIRE;
2. CONTACT RESISTANCE: 5 OHM MAX;
3. INSULATION RESISTANCE: 5M OHM MIN;
4. HIE-POT: 300V DC/10MS

WIRE ADDRESS

P1		P2
1	—————	1
2	—————	2
3	—————	3

					REV.	DESCRIPTION			DATE		
						TOLERANCE		SFCABLE.COM			
						INCHES	M/M				
4		MOLD SR:60P PVC WHITE	/	G		.X	.015				.30
3		SHELL, ALUMINU ALLOY, NICKEL PLATED	2	PCS	.XX	.010	.10				
					.XXX	.005	.05				
2		ST 3.5 STEREO MALE NICKEL-PLATED;	2	PCS	DRAWN BY	Dawson		3.5 mm male to male cable			
1		CABLE:NON-UL 30AWG*2C+B, OD=4.2MM JACKET:PVC GRAY, 80P	1	PCS	CHECK BY		SCALE	NONE	DRAWING NO:		REV. A
							UNIT	MM			
					APPD BY		DATE	2013.03.08			1/3
NO	PART NO	SPECIFICATION	Q' TY	UNIT							